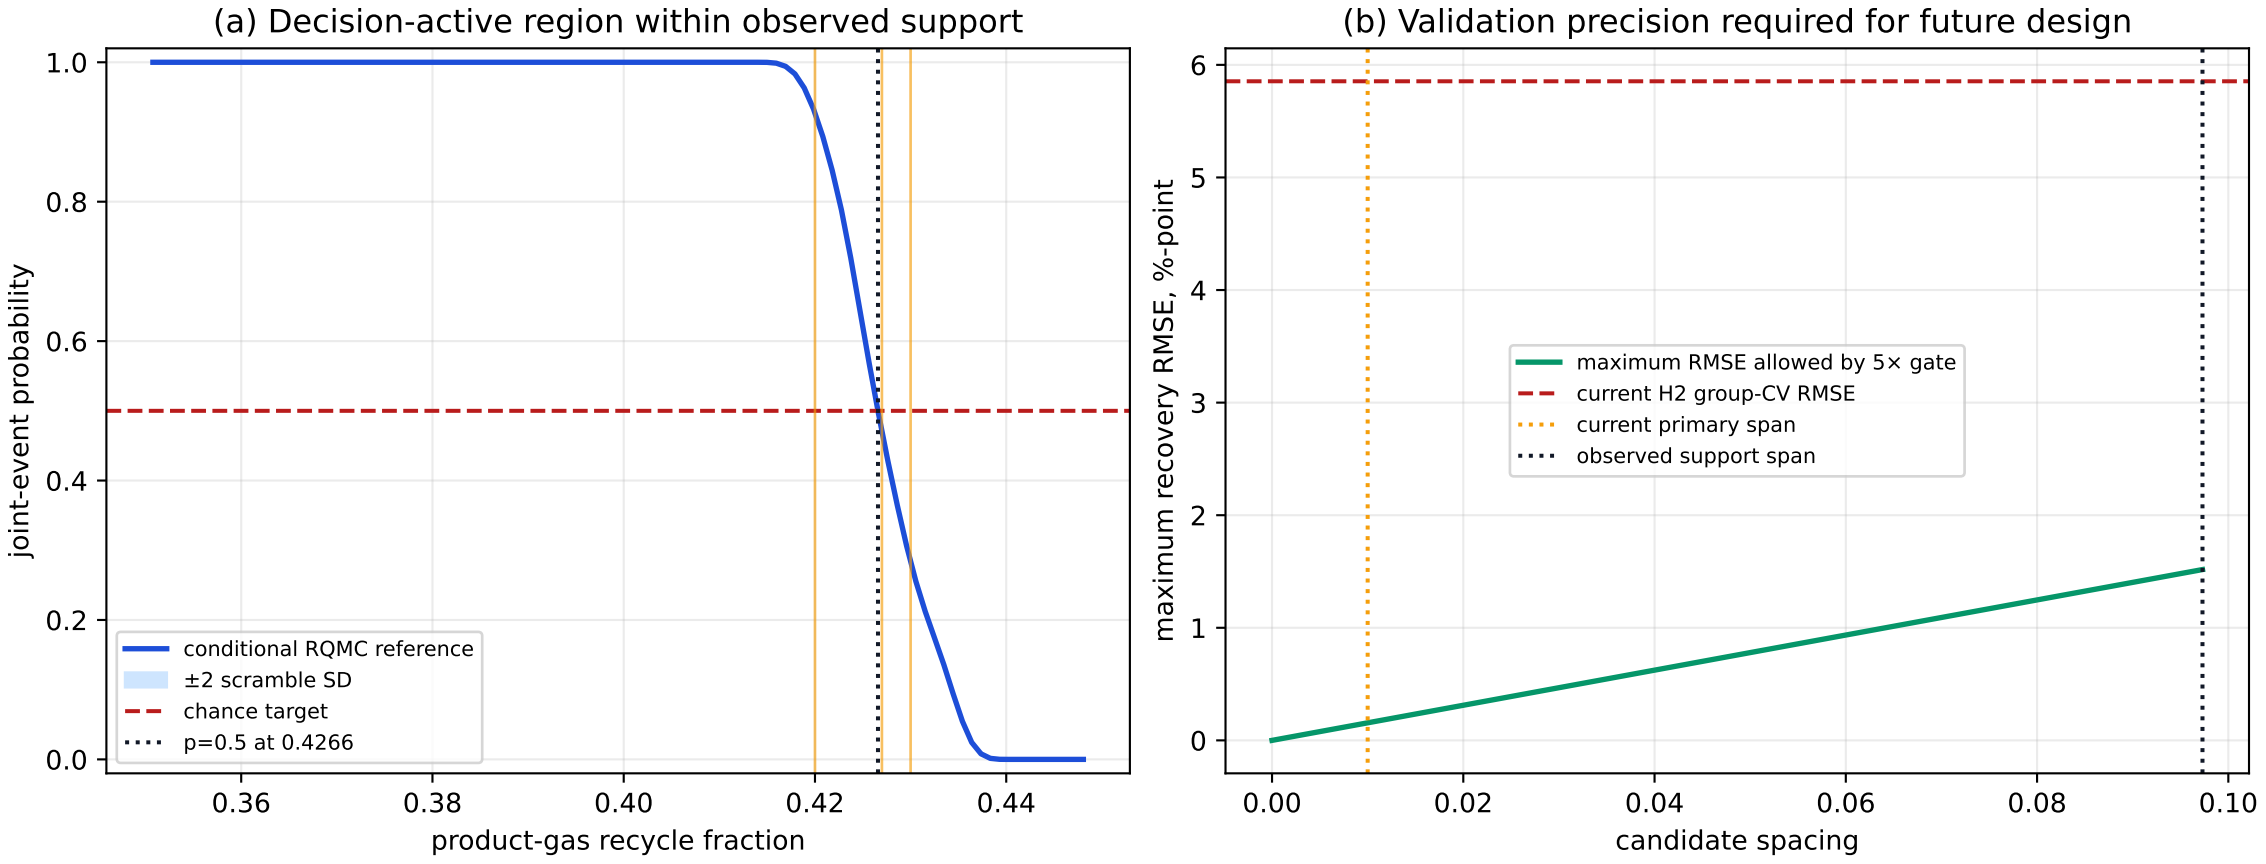
(a) Decision-active region within observed support
joint-event probability
product-gas recycle fraction
conditional RQMC reference
±2 scramble SD
chance target
p=0.5 at 0.4266
(b) Validation precision required for future design
maximum recovery RMSE, %-point
candidate spacing
maximum RMSE allowed by 5× gate
current H2 group-CV RMSE
current primary span
observed support span