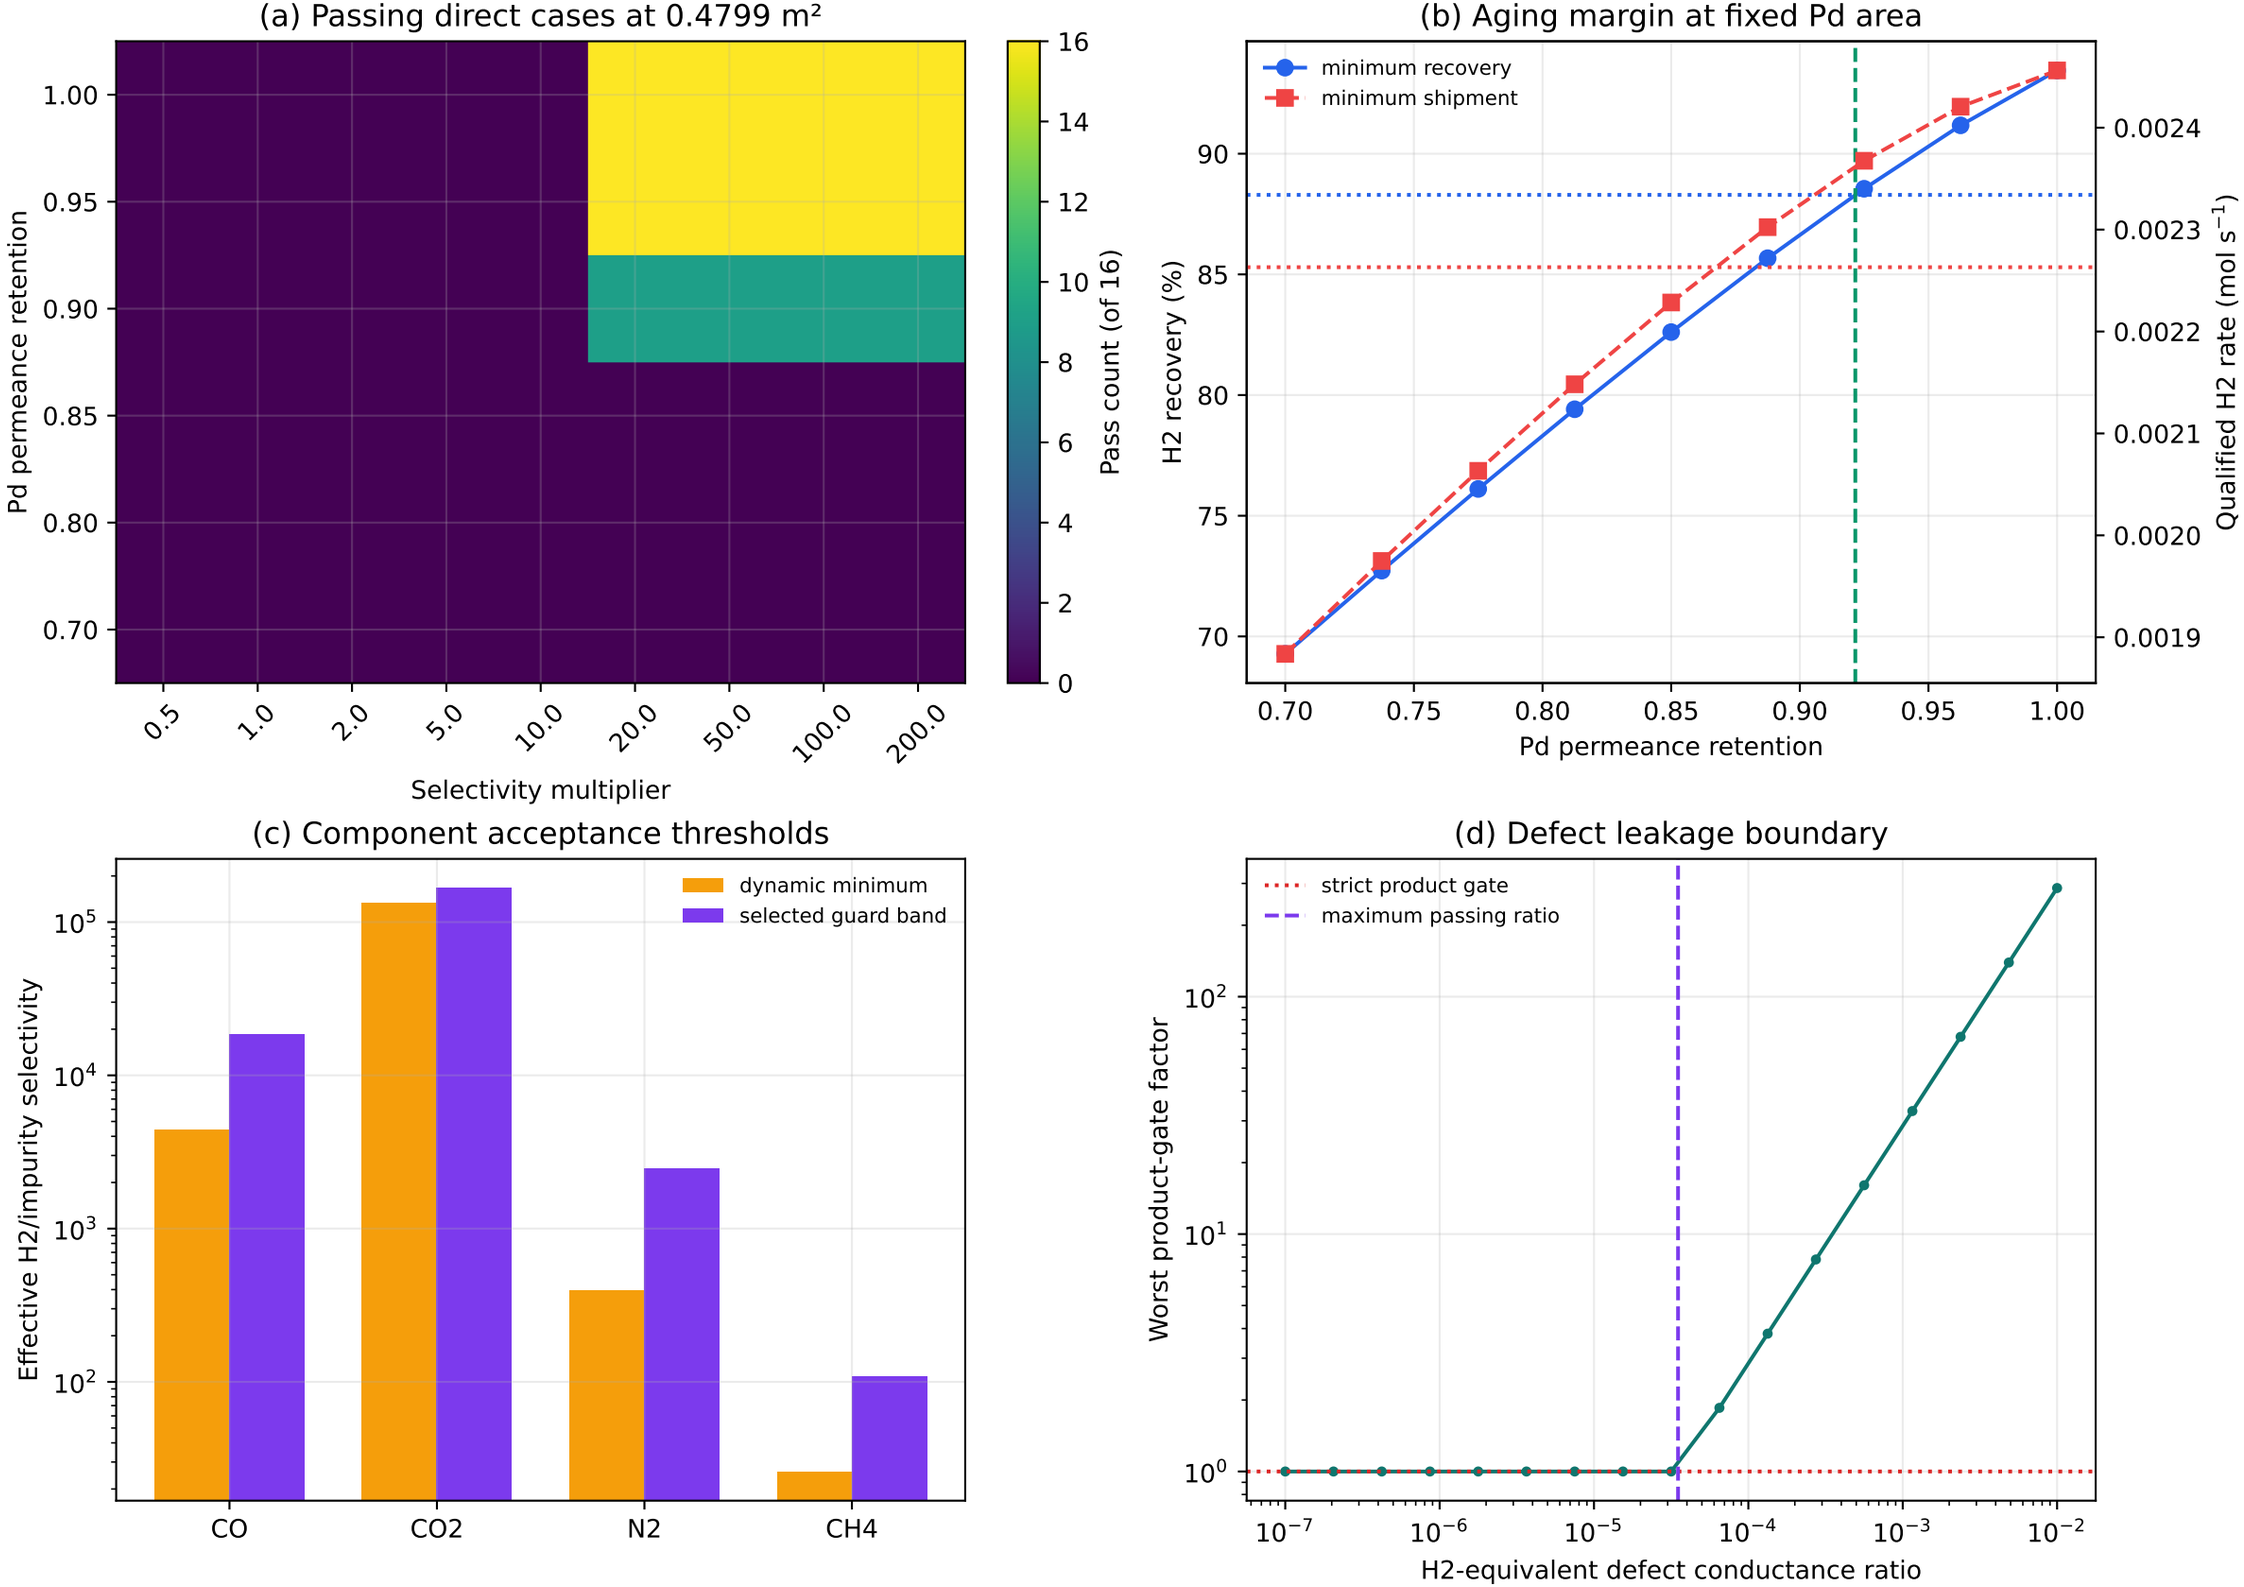
(a) Passing direct cases at 0.4799 m²
Pd permeance retention
Selectivity multiplier
Pass count (of 16)
(b) Aging margin at fixed Pd area
minimum recovery
minimum shipment
H2 recovery (%)
Qualified H2 rate (mol s⁻¹)
Pd permeance retention
(c) Component acceptance thresholds
dynamic minimum
selected guard band
Effective H2/impurity selectivity
CO
CO2
N2
CH4
(d) Defect leakage boundary
strict product gate
maximum passing ratio
Worst product-gate factor
H2-equivalent defect conductance ratio