Approve a clear route to reception

Two public routing schemes reach the same reception point, but the visitor-flow workbook and annotated floor plans disagree on the narrow approach width.

DECISION NEEDED

03 October 2025

Approve one public routing scheme

EVIDENCE WINDOW

30 Sep 2025

Frozen facilities snapshot valid through this date.

ALTERNATIVES

North / South

Separate public routes; each uses a distinct reception approach.

KNOWN CONDITION

1,100 mm

North Loop plan width is below the 1,200 mm minimum.

DECISION QUESTION

Which route should carry public visitors to reception?

This deck separates physical clearance from demand evidence, makes both source values visible, and keeps the unresolved sign-location completion separate from the calculated comparison.

SOURCE: facilities_snapshot_2025-09-30.xlsx

DECISION BASIS

Evidence rules and policy frame

SELECTED SOURCE-PRECEDENCE RULE

Annotated floor plans control physical clearance.

Visitor-flow workbook evidence controls operational demand and planning comparison. The same rule is applied to North Loop and South Loop; the sources are not averaged or swapped to favor a route.

SUPPLIED PUBLIC-WIDTH POLICY

Minimum 1,200 mm

Preferred 1,500 mm

Basis: narrowest point of the public reception approach

CLEANING BOUNDARY - SOURCE RECORDS RETAINED, COMPARISON NORMALISED

Input pattern	Observed in snapshot	Treatment	Why it matters
Exact duplicate	North workbook width	Count once	No inflated evidence
Case / spacing variants	south loop; source labels	Normalise labels	One scheme per route
Malformed measurement	1,O5 m	Exclude as unusable	No false precision
Staff/loading record	Loading spur	Exclude	Not a public route

Comparison convention

All displayed widths are normalised to millimetres (mm); route lengths are metres (m); flow is visitors per 15 min.

ROUTE ANATOMY

North Loop | physical conflict at reception approach

ROUTE TOPOLOGY

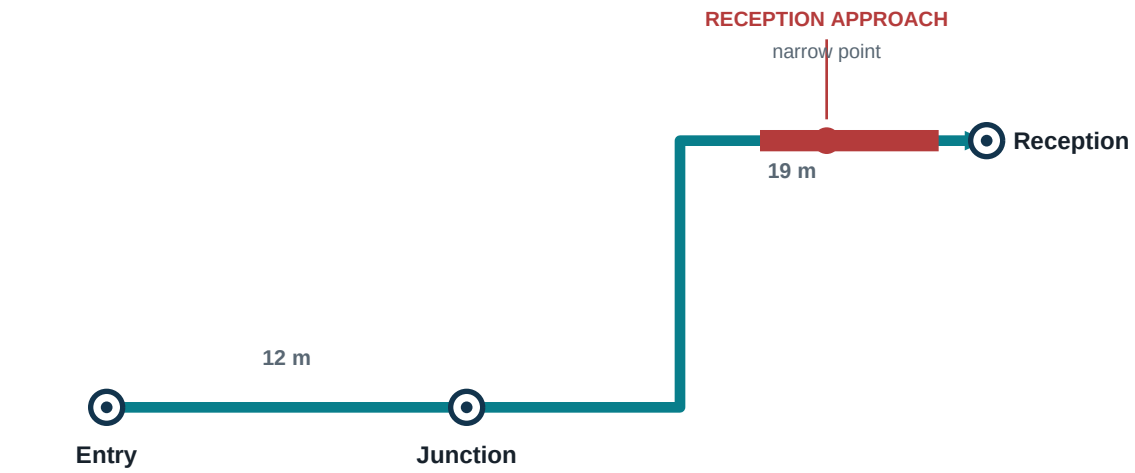

2 turns recorded | 31 m total public route

Route = visitor path W = workbook P = plan widths: mm

SOURCE-BACKED WIDTH COMPARISON

W	**Visitor-flow workbook** planning comparison	**1,500 mm**
P	**Annotated floor plans** physical control	**1,100 mm**

SOURCE DISAGREEMENT — **400 mm difference**

POLICY STATUS UNDER ANNOTATED-PLAN CONTROL

Below minimum by 100 mm - not compliant

VISITOR FLOW
18 visitors / 15 min

ROUTE MEASURE
31 m | 2 turns

ROUTE ANATOMY

South Loop | physical route to reception

ROUTE TOPOLOGY

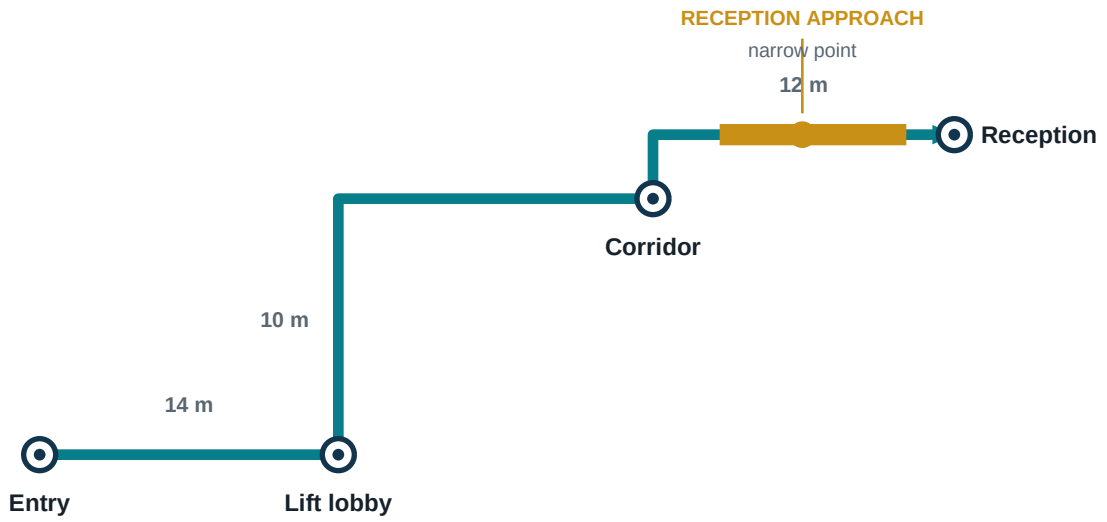

3 turns recorded | 36 m total public route

Route = visitor path | W = workbook | P = plan | widths: mm

SOURCE-BACKED WIDTH COMPARISON

W	**Visitor-flow workbook** planning comparison	**1,250 mm**
P	**Annotated floor plans** physical control	**1,450 mm**

SOURCE DISAGREEMENT

200 mm difference

POLICY STATUS UNDER ANNOTATED-PLAN CONTROL

Minimum met; 50 mm below preferred

VISITOR FLOW

16 visitors / 15 min

ROUTE MEASURE

36 m | 3 turns

ONE DECISION VIEW

Direct comparison | both routes

Decision measure	North Loop	South Loop	Read-across
Physical clear width (plan control)	1,100 mm	1,450 mm	South clears minimum
Workbook clear width	**1,500 mm**	**1,250 mm**	Demand source only
Source disagreement	**400 mm**	**200 mm**	Both conflicts visible
Policy status (plan control)	**Below minimum**	**Minimum met; below preferred**	Rule applied to both
Route length	**31 m**	**36 m**	South +5 m
Visitor flow	**18 / 15 min**	**16 / 15 min**	North +2 visitors
Turns	**2**	**3**	South +1 turn

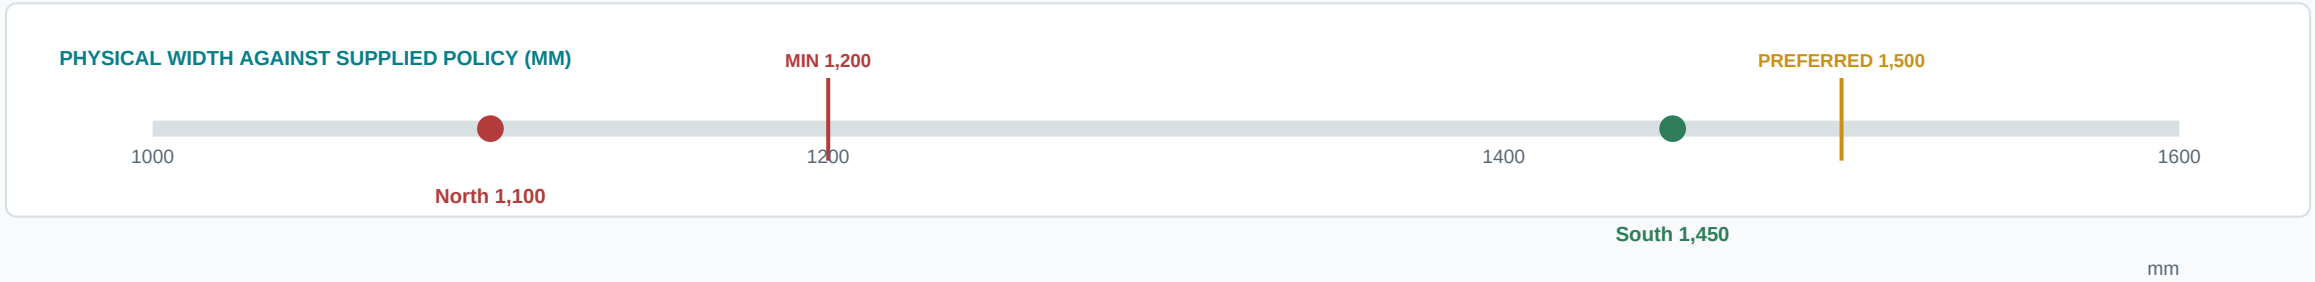

DECISION AND CONTROL

Recommendation | approve South Loop

RECOMMENDED PUBLIC ROUTING

Approve South Loop for public wayfinding

Plan-first physical clearance rule applied consistently

WHY THIS ROUTE

Its annotated-plan width is 1,450 mm, clearing the supplied 1,200 mm minimum. Its source gap is 200 mm, smaller than North Loop's 400 mm disagreement. Operational demand remains visible at 16 visitors per 15 min.

PRINCIPAL TRADE-OFF

South Loop is 5 m longer (36 m versus 31 m), adds one turn (3 versus 2), and carries 2 fewer visitors per 15 min in the workbook observation.

NORTH LOOP OUT-OF-RANGE CONDITION AND CONTROL

Junction to Reception: annotated-plan clear width 1,100 mm - 100 mm below minimum; not compliant.

Control: keep general visitor wayfinding off this pinch point. Facilities must field-verify the clear width after movable furnishings are cleared and coordinate any correction. Only consider public release after a site check confirms at least 1,200 mm; otherwise retain North Loop for non-public or staff-assisted contingency use.

RECORD AND HANDOFF

Approval handoff | final completion

READ-ONLY SOURCE + CALCULATED COMPARISON

Recommended public routing: South Loop

Precedence: annotated floor plans control physical clear width; visitor-flow workbook controls demand.

South Loop: 1,450 mm plan width | 36 m | 16 visitors / 15 min | 3 turns.

North Loop: 1,100 mm plan width - below 1,200 mm minimum; do not sign for general arrivals pending verification.

USER COMPLETION / EDITABLE

Final sign location

Complete only after the final coordinated location is confirmed.

COMPACT HANDOFF NOTE

Next user: enter only the final coordinated sign location in the editable field. Verify the facilities snapshot is valid through 30 September 2025 before release. All comparison figures are source-backed or calculated read-only content; do not overwrite or treat them as user inputs.

Snapshot: facilities_snapshot_2025-09-30.xlsx | Sign location remains unresolved in the source snapshot.