
Multilayer Chip Balun – SLBL Series

Operating Temp. : -40℃~+85℃



FEATURES

- Small size, enable high density mounting
- Low insertion loss, excellent amplitude and phase balance
- Surface mount type, high reliability

APPLICATIONS

- Mobile communication equipment for LTE, 5G systems, etc.
- Bluetooth, Wi-Fi, WLAN etc.

PRODUCT IDENTIFICATION

SLBL ① **18** ② **-2R450G** ③ **-05** ④ **-31** ⑤ **T** ⑥

①

Type	
SLBL	Balun

②

External Dimensions (L×W) (mm)	
06 [0202]	0.6×0.5
15 [0402]	1.0×0.5
18 [0603]	1.6×0.8
21 [0805]	2.0×1.2

③

Center Frequency	
Example	Nominal Value
2R450G	2450.0MHz
5R400G	5400.0MHz

④

Balance Impedance	
05	50Ω
10	100Ω

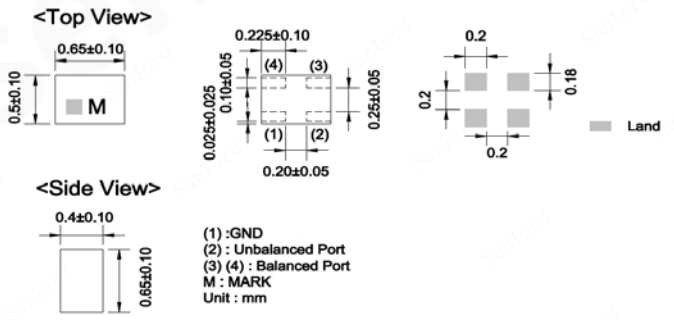

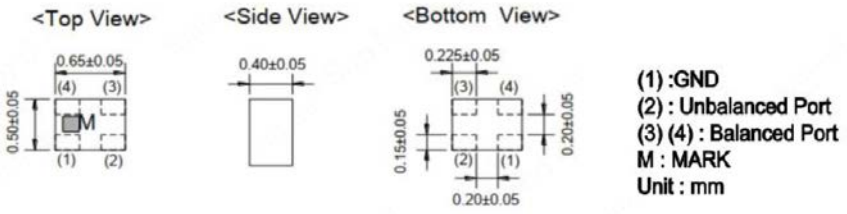
⑤

Series Code
01,31 etc.

⑥


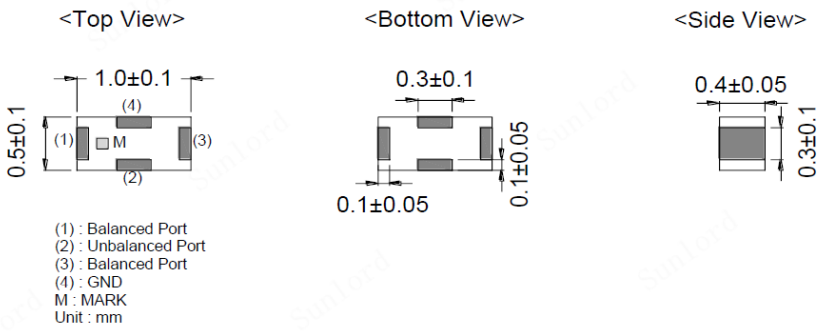

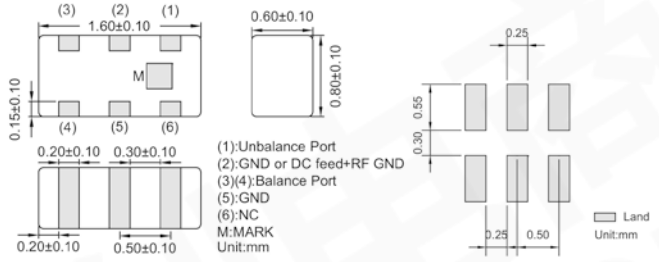

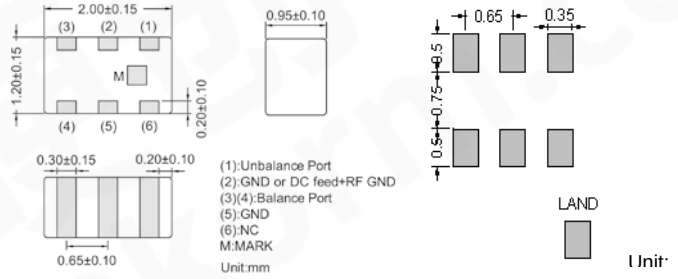
Packing	
T	Tape Carrier Package

SHAPE AND DIMENSIONS

Type: SLBL06 Series	Dimensions and Land Patterns
	
SLBL06-1R900G-10-03T	Dimensions and Land Patterns
	

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 **Tel**: 0086-755-29832333 **Fax**: 0086-755-82269029 **E-Mail**: sunlord@sunlordinc.com

SHAPE AND DIMENSIONS

Type: SLBL15 Series	Dimensions and Land Patterns
	
Type: SLBL18 Series	Dimensions and Land Patterns
	
Type: SLBL21 Series	Dimensions and Land Patterns
	

SPECIFICATIONS

SLBL06 TYPE

Part Number	Unbalance Port Impedance	Balance Port Impedance	Frequency Range	Insertion Loss	Balance Port VSWR	Amplitude Difference	Phase Difference	Power Capacity
Units	Ω	Ω	MHz	dB	-	dB	Deg.	mW
SLBL06-0R770G-10-01T	50	100	698~960	0.6 Max. at 25°C	2.0 Max.	3.0 Max.	180±10	500
SLBL06-1R900G-10-03T	50	100	1710~2200	0.6 Max. at 25°C	2.0 Max	3.0 Max.	180±15	500
SLBL06-2R500G-10-01T	50	100	2300~2700	0.55 Max. at 25°C	2.0 Max.	2.5 Max.	180±10	500

SLBL15 TYPE

Part Number	Unbalance Port Impedance	Balance Port Impedance	Frequency Range	Insertion Loss	Balance Port VSWR	Amplitude Difference	Phase Difference	Power Capacity
Units	Ω	Ω	MHz	dB	-	dB	Deg.	mW
SLBL15-0R770G-10-31T	50	100	758~821	0.6 Max. at 25 °C	1.5 Max.	2.0 Max.	180±10	500
SLBL15-1R900G-10-31T	50	100	1805~2025	0.6 dB Max. at 25 °C	1.5 Max.	2.5 Max.	180±10	500

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 **Tel**: 0086-755-29832333 **Fax**: 0086-755-82269029 **E-Mail**: sunlord@sunlordinc.com

SPECIFICATIONS

SLBL18 TYPE

Part Number	Unbalance Port Impedance	Balance Port Impedance	Frequency Range	Insertion Loss	Balance Port VSWR	Amplitude Difference	Phase Difference	Power Capacity
Units	Ω	Ω	MHz	dB	-	dB	Deg.	mW
SLBL18-1R500G-05-31T	50	50	699~960	1.4dB Max. at 25°C	2.0 Max.	±1.2 dB	180±10	3.0 W Max.
			1710~1995	1.3dB Max. at 25°C				
			2000~2700	1.5dB Max. at 25°C				
SLBL18-1R500G-10-32T	50	100	673~2700	1.7dB Max. at 25°C	2.45 Max.	±1.5 dB	180±15	3.0 W Max.
SLBL18-2R450G-05-02T	50	50	2450±50	0.9 Max. at 25°C 1.0 Max. at -40 to +85°C	2.0 Max.	2.0 Max.	180±10	500
SLBL18-2R500G-05-31T	50	50	2300~2700	1.2 dB Max. at 25°C	2.0 Max.	±1.5 dB	180±10	3.0 W Max.
SLBL18-2R500G-10-31T	50	100	2300~2700	1.2 dB Max. at 25°C	2.0 Max.	±1.5 dB	180±10	3.0 W Max.
SLBL18-3R600G-05-31T	50	50	3300~3900	1.2 dB Max. at 25°C	2.0 Max.	±1.5 dB	180±15	2.0 W Max.
SLBL18-3R600G-10-31T	50	100	3300~3900	1.0 dB Max. at 25°C	2.0 Max.	±1.2 dB	180±15	2.0 W Max.
SLBL18-4R500G-05-31T	50	50	3200~4000	1.1 dB Max. at 25°C	2.1 Max.	±1.2 dB	180±12	3.0 W Max.
			4000~5000	1.0 dB Max. at 25°C	2.0 Max.			
			5000~6000	1.0 dB Max. at 25°C	2.0 Max.			
SLBL18-4R500G-10-31T	50	100	3200~4000	1.1 dB Max. at 25°C	2.1 Max.	±1.2 dB	180±12	3.0 W Max.
			4000~5000	1.0 dB Max. at 25°C	2.0 Max.			
			5000~6000	1.0 dB Max. at 25°C	2.0 Max.			

SLBL21 TYPE

Part Number	Unbalance Port Impedance	Balance Port Impedance	Frequency Range	Insertion Loss	Balance Port VSWR	Amplitude Difference	Phase Difference	Power Capacity
Units	Ω	Ω	MHz	dB	-	dB	Deg.	mW
SLBL21-2R400G-05-01T	50	50	2400±100	0.8 Max. at 25°C 0.9 Max. at -40 to +85°C	2.0 Max.	2.0 Max.	180±10	500
SLBL21-2R400G-10-01T	50	100	2400±100	0.9 Max. at 25°C 1.0 Max. at -40 to +85°C	2.0 Max.	2.0 Max.	180±10	500
SLBL21-5R400G-10-31T	50	100	4900~5900	1.0 dB Max. at 25°C	2.0 Max.	±2.0 dB	180±10	3.0 W Max.
SLBL21-5R500G-10-33T	50	100	3000~8000	1.5 dB Max. at 25°C	2.3 Max.	±2.5 dB	180±20	3.0 W Max.

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 **Tel**: 0086-755-29832333 **Fax**: 0086-755-82269029 **E-Mail**: sunlord@sunlordinc.com