



DEALER BEST PRACTICE SERIES

FILTER CART – GASOLINE

ENGINE POWERED

Maintenance
and Repair

Application

Component
Life
Management

Component
Renewal
(CRC)

MARC
Management

1.0

Introduction.....

1

2.0

Best Practice Description.....

1

3.0

Implementation Steps.....

2

4.0

Benefits.....

2

5.0

Resources Required.....

2

6.0

Supporting Attachments / References.....

2

7.0

Related Best Practices.....

2

8.0

Acknowledgements.....

3

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction


This Best Practice is a dealer fabricated oil filtration tool to accommodate Field Service Operation on doing Maintenance and Repair to filtrate new or use oil until meet CAT Roll off Specification.

This tool solves power source problems in remote areas that have no existing electricity or compressor sources, and provide better services to customer by simplifying the job by minimizing the tools required to complete the filtration service by compartmentalizing the process into a semi-compact filtration cart.

2.0 Best Practice Description

The purpose of fabricating this tool is accommodating Field Service Operation on the oil filtration process while the job is located at a remote area without existing electricity or compressor.

Technicians do not need to find electricity or bring compressor to job location for filtration process because it is all incorporated in a semi-portable gasoline engine driven filtration tool. Just like ordinary filtration cart, connect the hose to the tool and machine for kidney looping or connect the hose to the tool, machine and oil barrel for transferring new oil.

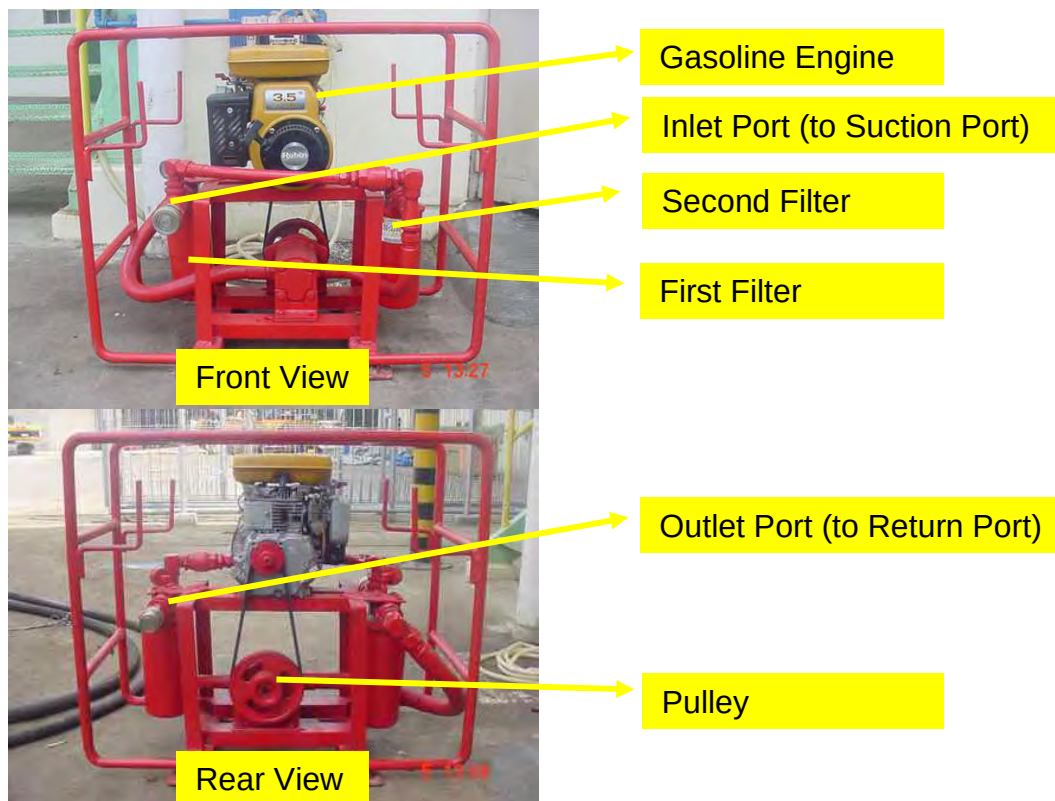

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Filter Cart – Gasoline Engine Powered	DATE 5/14/2012	CHG NO 00	NUMBER 1108-1.01-1258
---------------------------------------	-------------------	-----------------	--------------------------



Kidney looping Process



Oil Transfer Process

3.0 Implementation Steps

- The first step is to fabricate the tool.
- The design and required parts lists are attached to this Best Practice.

4.0 Benefits

Save Time –

- Reduces the number of required tools transported to the job location.
- Improves work time efficiencies, reducing job preparation.

5.0 Resources Required

People-

Trained personnel in effective use of the new tooling.

Tools

Fabricate a filter cart either internally or contract locally.

6.0 Supporting Attachments / References

- Required Design
- Required Part List

7.0 Related Best Practices

- N/A

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Filter Cart – Gasoline Engine Powered	DATE 5/14/2012	CHG NO 00	NUMBER 1108-1.01-1258
---------------------------------------	-------------------	-----------------	--------------------------

8.0 Acknowledgements

Expertise by:

- Expertise by:
 - o Isroil
 - o PT Trakindo Utama Samarinda Branch - INDONESIA
 - o Email : isroil@trakindo.co.id
 - o Phone : +62 541 260 269
 - o Mobile : +62 812 4053939

This Best Practice was written by:

- o David J. Wilde
- o Corporate Best Practice
- o Product Support Standard and Development
- o PT. Trakindo Utama - Head Office
- o Email: djwilde@trakindo.co.id
- o Office: 62217822373 ext: 1120

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Filter Cart – Gasoline Engine Powered	DATE 5/14/2012	CHG NO 00	NUMBER 1108-1.01-1258
---------------------------------------	-------------------	-----------------	--------------------------