



MINING DEALER BEST PRACTICE

Universal base for track type tractors final drives

**Maintenance and
Repair**

Application

**Component Life
Management**

**Component
Renewal (CRC)**

**MARC
Management**

Universal Final Drive Base.....	0
1.0 Introduction.....	1
2.0 Best Practice Description.....	2
3.0 Implementation Steps.....	2
4.0 Benefits.....	2
5.0 Resources Required.....	3
6.0 Supporting Attachments / References.....	3-9
7.0 Related Best Practices.....	10
8.0 Acknowledgements.....	10

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices.” Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

**February 21
1.01-210212-1**

1.0 Introduction

During the disassembly process, the TTT final drives are transported vertically, except when they are washed, as it is done horizontally.

This is due to the fact that it is necessary to have access to wash the component internally on both sides, as illustrated in the following image.



After removing the brake and the planetary reduction from the Dozer final drives, the spindle-wheel assembly is sent to pre-wash on two wooden pallets; this handling and transport is complicated and unstable due to its geometry, generating an unsafe condition for those around during the execution of the task.

This Best Practice proposes the design and manufacture of a universal base for the secure attachment and transport of the Spindle-Wheel assembly in all models of Dozer Final drives when they are sent to the washing area during the disassembly process.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Universal base for track type tractors final drives	DATE 2/12/2021	CHG NO 00	NUMBER 1.01-210212-1

2.0 Best Practice Description

This best practice applies to all models of final drives on D9, D10 and D11 track-type tractors. The base is manufactured in A36 Steel; it has two fastening points to transport it by means of the forklift. In each one, a curved support is installed; these are separated 485 mm from each other, where the side of the Spindle and the wheel rest. The first one rests to 732mm and the second one rests to 462mm measured from the ground.



3.0 Implementation Steps

- Take measurements to the different models on Dozers final drives.
- Design of the base according to the measures taken.
- Load Analysis of the base.
- Manufacturing of the base.
- Conduct tests at the shops with different models of final drives.
- Start-up, after disclosing it to the operation with its change format.

4.0 Benefits

- It is safe when transporting the component.
- It is safe for the personnel when transporting.
- There's some reduction in transporting times due to its reliability by the fastening of the component to the base.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Universal base for track type tractors final drives	DATE 2/12/2021	CHG NO 00	NUMBER 1.01-210212-1



5.0 Resources Required

NOTA DE SOLDADURA

A MENOS QUE SE ESPECIFIQUE LO CONTRARIO, TODAS LAS SUPERFICIES SERÁN UNIDAS MEDIANTE FILETE CONTINUO DE 45°. EL TAMAÑO DE LA SOLDADURA DEBE SER 1/16" MÁS PEQUEÑA QUE EL MIEMBRO MÁS DELGADO DE LA JUNTA HASTA UN ESPESOR DE 5/16" Y 1/8" MÁS PEQUEÑO QUE EL MIEMBRO MÁS DELGADO DE LA JUNTA HASTA UN ESPESOR DE 3/4"

ITEM	CANTIDAD	DESCRIPCIÓN	LONGITUD (mm)	PESO (Kg)	MATERIAL
B01	1	CANAL 6x8.2	1200	12.28	ASTM A36 Acero
B02	1	LAMINA DE 3/8"		43.42	ASTM A36 Acero
B03	2	LAMINA DE 3/4"		11.68	ASTM A36 Acero
B04	1	LAMINA DE 1/2"		15.35	ASTM A36 Acero
B05	2	LAMINA DE 1/2"		4.95	ASTM A36 Acero
B06	1	LAMINA DE 1/2"		12.96	ASTM A36 Acero
B07	1	LAMINA DE 1/2"		13.33	ASTM A36 Acero
B08	2	LAMINA DE 1/2"		0.81	ASTM A36 Acero
B09	1	LAMINA DE 3/8"		43.42	ASTM A36 Acero
B10	1	LAMINA DE 3/4"		19.01	ASTM A36 Acero
B11	2	LAMINA DE 1/2"		0.33	ASTM A36 Acero
B12	2	LAMINA DE 1/2"		1.73	ASTM A36 Acero
B13	1	CANAL 6x8.2	1200	12.28	ASTM A36 Acero

6.0 Supporting Attachments / References

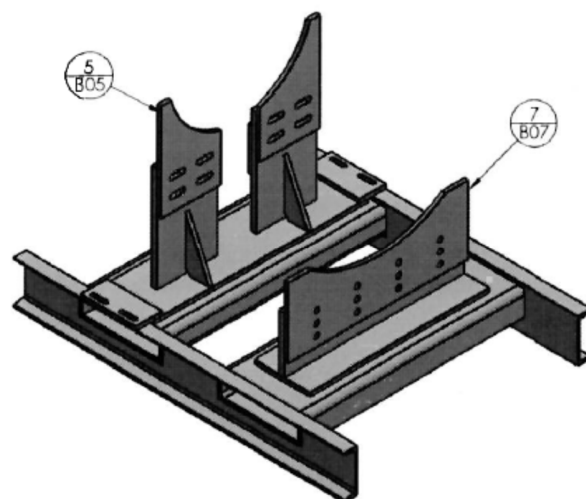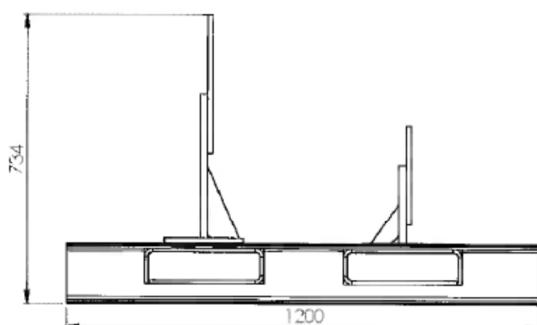


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1

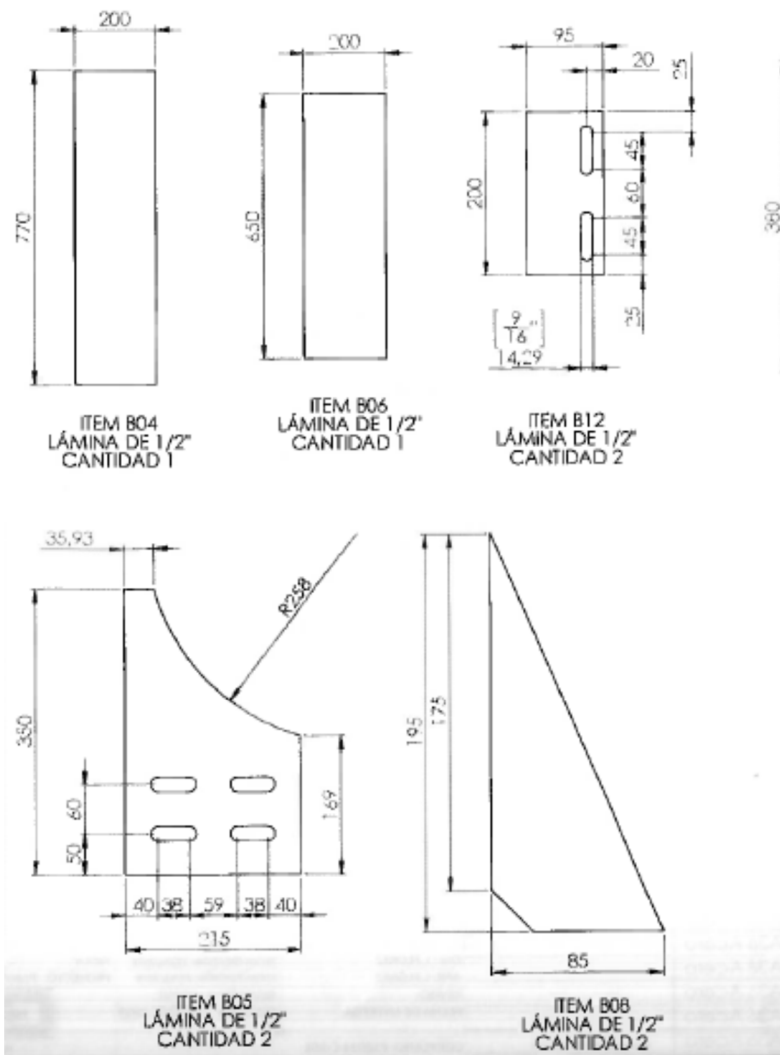


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives


DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1

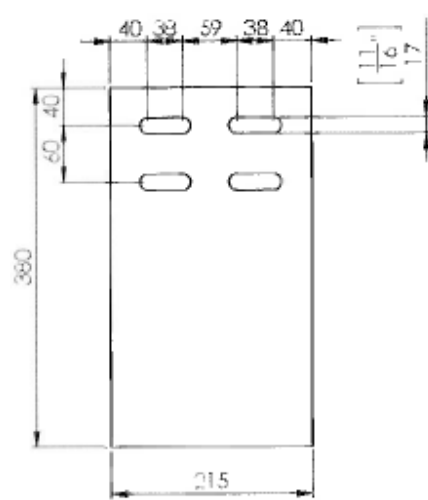

ITEM B03
LÁMINA DE 3/4"
CANTIDAD 2

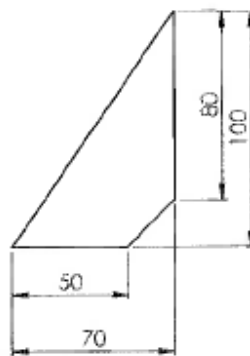

ITEM B11
LÁMINA DE 1/2"
CANTIDAD 2


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00


NUMBER
1.01-210212-1

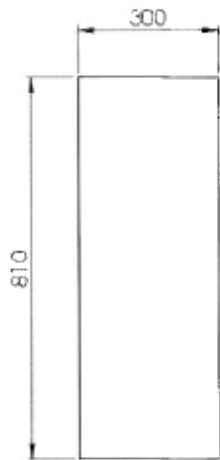

ITEM B02
LÁMINA DE 3/8"
CANTIDAD 2

LISTA DE CORTE

NOTA DE SOLDADURA
A MENOS QUE SE ESPECIFIQUE LO CONTRARIO, TODAS LAS SUPERFICIES
SERÁN UNIDAS MEDIANTE FILETE CONTINUO DE 45°. EL TAMAÑO DE LA
SOLDADURA DEBE SER 1/16" MÁS PEQUEÑA QUE EL MIEMBRO MÁS
DELGADO DE LA JUNTA HASTA UN ESPESOR DE 5/16" Y 1/8" MÁS
PEQUEÑO QUE EL MIEMBRO MÁS DELGADO DE LA JUNTA HASTA UN
ESPESOR DE 3/4"

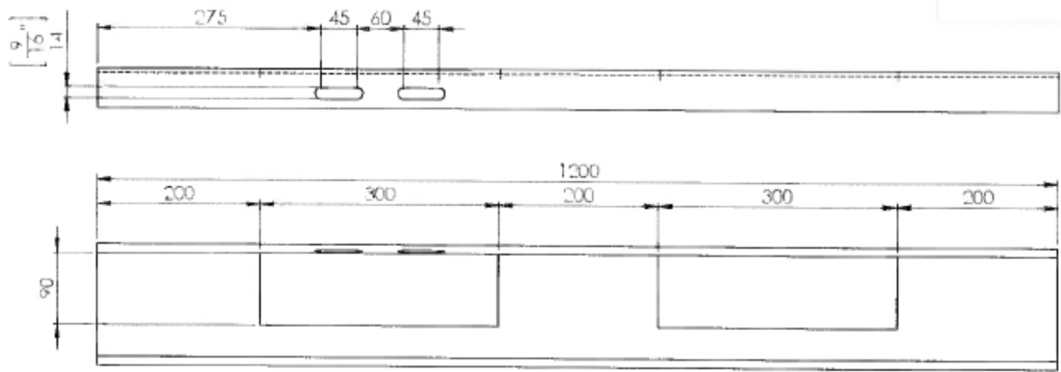

ITEM B13
CANAL 6x8.2
CANTIDAD 2
DERECHO E IZQUIERZO


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives


DATE
2/12/2021

CHG
NO
00


NUMBER
1.01-210212-1

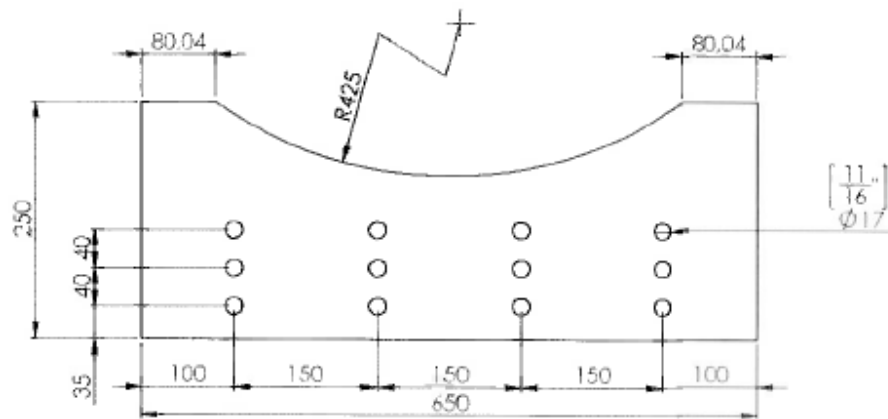

ITEM B07
LÁMINA DE 1/2"
CANTIDAD 1

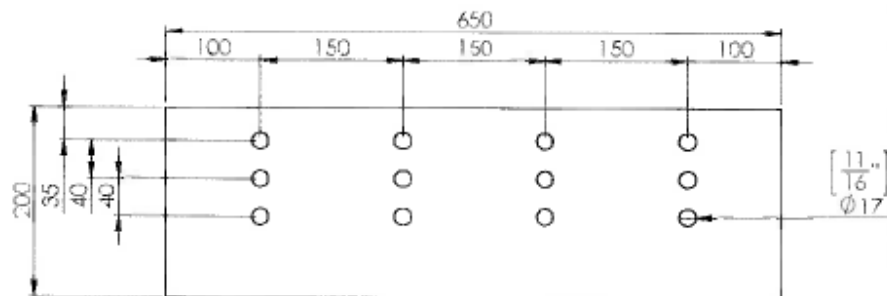

ITEM B10
LÁMINA DE 3/4"
CANTIDAD 1

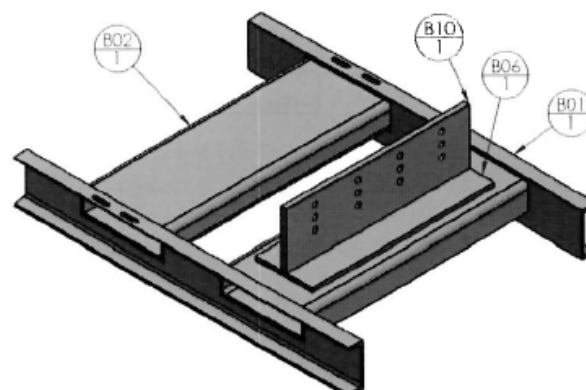



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1

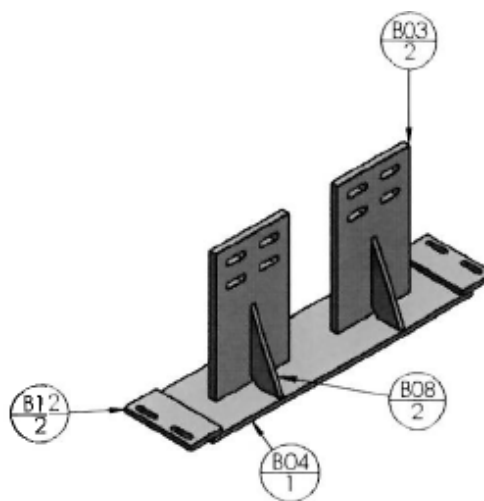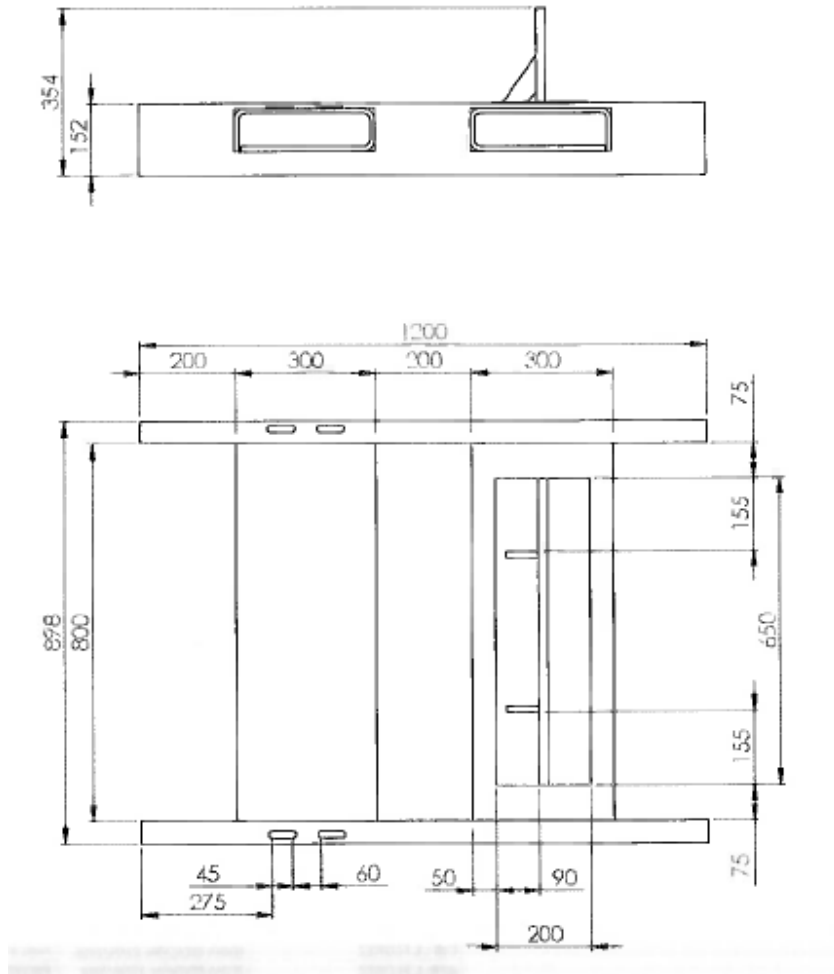



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1

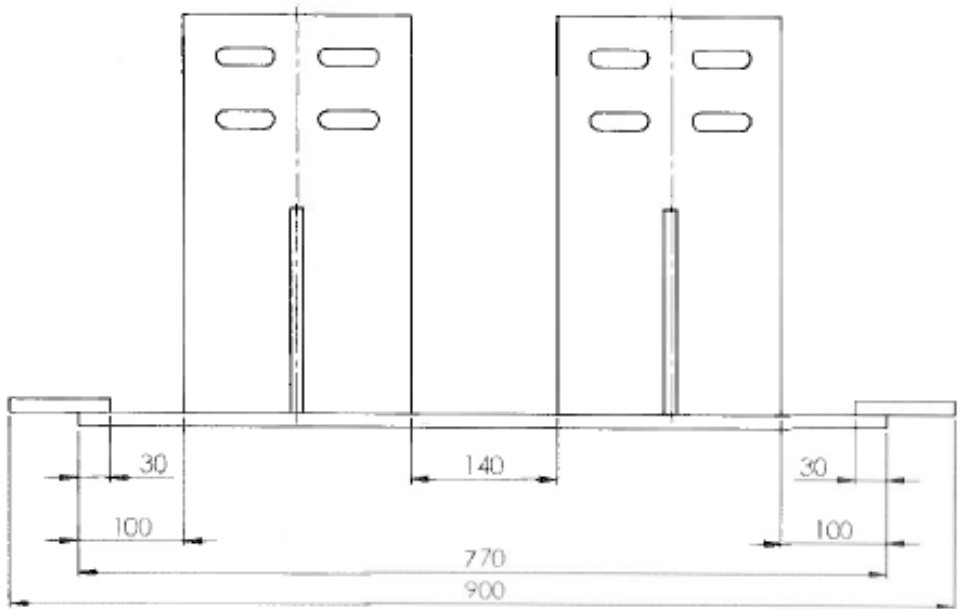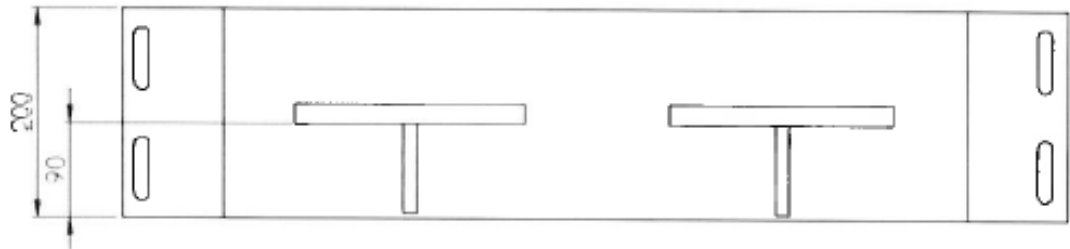

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1

7.0 Related Best Practices

None

8.0 Acknowledgements

Enrique Urbina
CRC Development Project Chief RELIZAN CAT
Email: enrique.urbina@relianz.com.co

Juan Luis Perez
CRC Engineer Assistant RELIZAN CAT
Email: practicante.desarrollocrc@relianz.com.co

Elkin Perez
CRC Workshop Supervisor DIMANTEC
Email: elkin.perez@dimantec.com.co

Checked by:

Luis Alberto Fernandez Chica
BP Coordinator & Development Engineer RELIANZ CAT
Email: luisalberto.fernandez@relianz.com.co

Karen De La Hoz Benitez
Training engineer RELIANZ CAT
Email: karen.delahoz@relianz.com.co

Translated by:

Edgard Romero Avena
Learning Solutions Specialist RELIANZ CAT
Email: edgard.romero@relianz.com.co

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Universal base for track type tractors final drives

DATE
2/12/2021

CHG
NO
00

NUMBER
1.01-210212-1