



MINING DEALER BEST PRACTICE

Used Oil Drain Fixture For OHT Final Drives

**Maintenance and
Repair**

Application

**Component Life
Management**

**Component
Renewal (CRC)**

**MARC
Management**

Used Oil Drain Fixture For OHT Final Drive

1.0	Introduction.....	1
2.0	Best Practice Description	1
3.0	Implementation Steps.....	2
4.0	Benefits	2
5.0	Resources Required.....	2
6.0	Supporting Attachments / References	2-4
7.0	Related Best Practices	5
8.0	Acknowledgements	5

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of "Best Practices." Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional "Best Practice" recommendations from our dealer network.

December 2020
1.01-201217-01

1.0 Introduction

During big PMs, oil in final drives is changed. Previously, to drain the used oil from the final drives the service team used various materials on hand (carton box, tin boxes, etc.) as a bridge between the wheel hub and the cart for used oil. Using makeshift items such as these can create potential for safety risks. For example, if a cardboard box is used it can get wet resulting in oil being spilt on the floor of the workshop. Spilt oil presents a significant slip hazard.

Borusan Makina Kazakhstan has developed a simple fixture that allows draining the used oil from the final drive without spilling it on the floor.


2.0 Best Practice Description

This fixture consists of the tank (1), the filler (2), the tap (3), 2 x handles (4) and 2 x bottom plates (5) of the different height for providing the slope of the fixture.





Used oil drain fixture

This fixture enables to drain the used oil from the final drive with no spillage of the oil on the floor or ground.

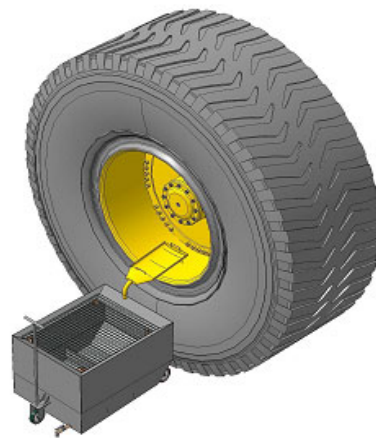

Graphical display how the fixture is used

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Used Oil Drain Fixture For OHT Final Drives	DATE 12/17/2020	CHG NO 00	NUMBER 1.01-201217-01

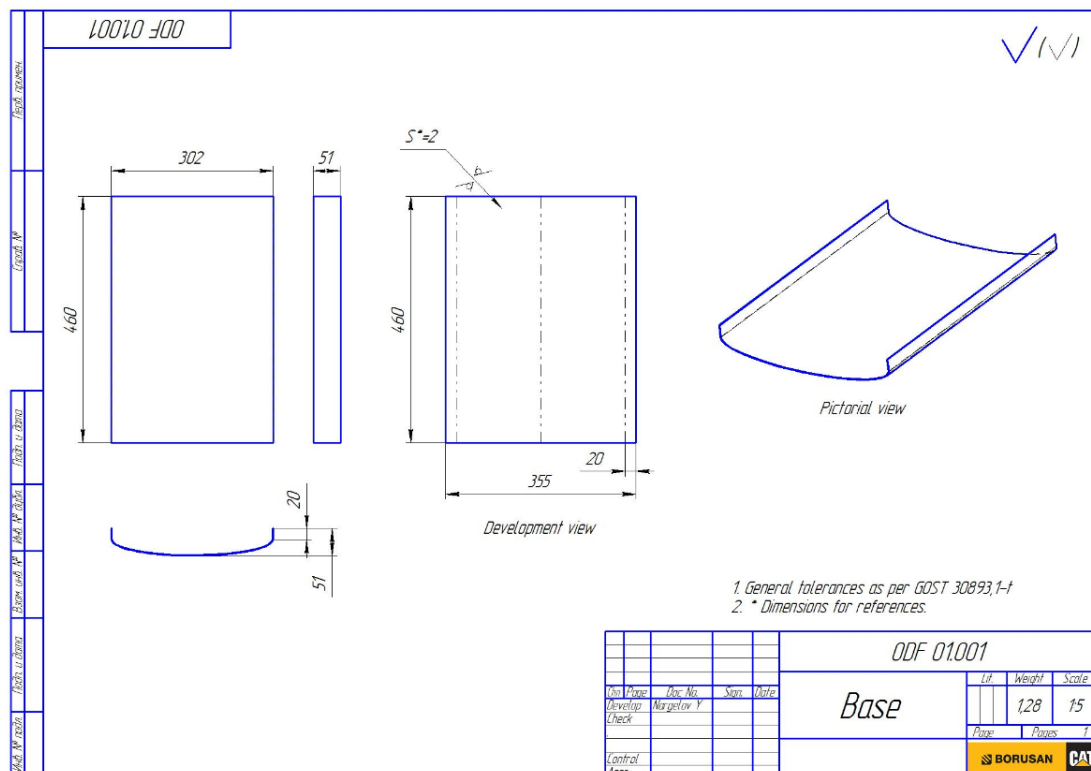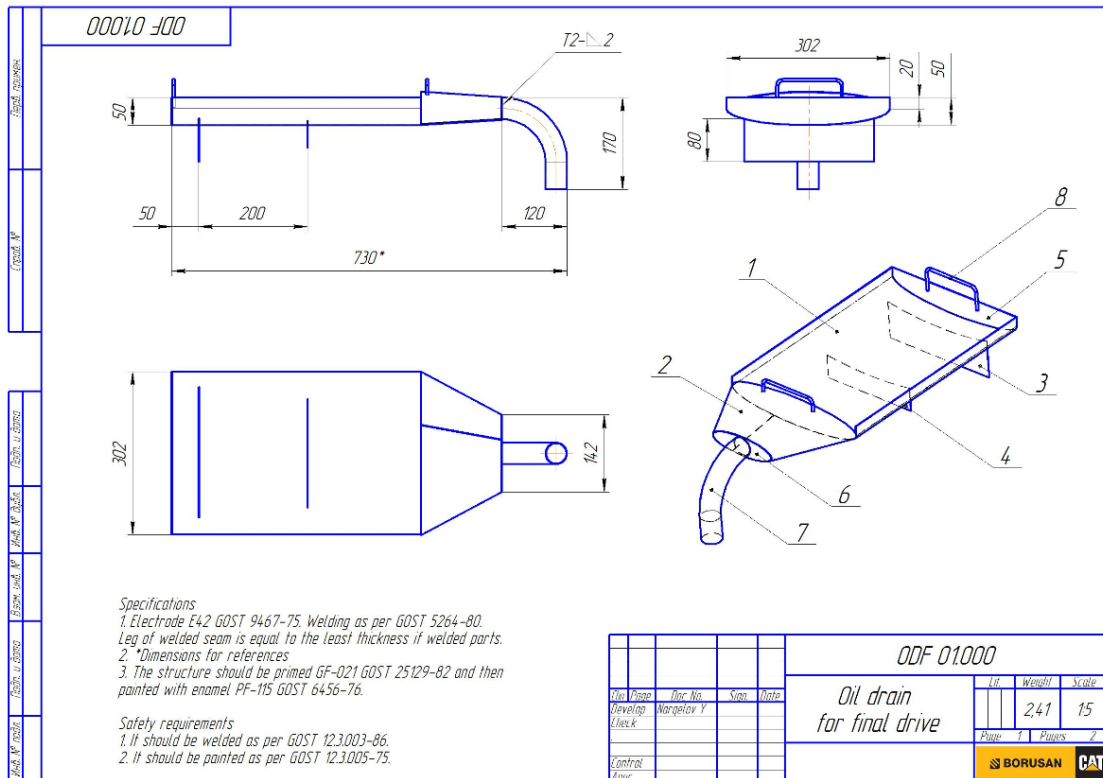



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Used Oil Drain Fixture For OHT Final Drives

DATE
12/17/2020

CHG
NO
00

NUMBER
1.01-201217-01

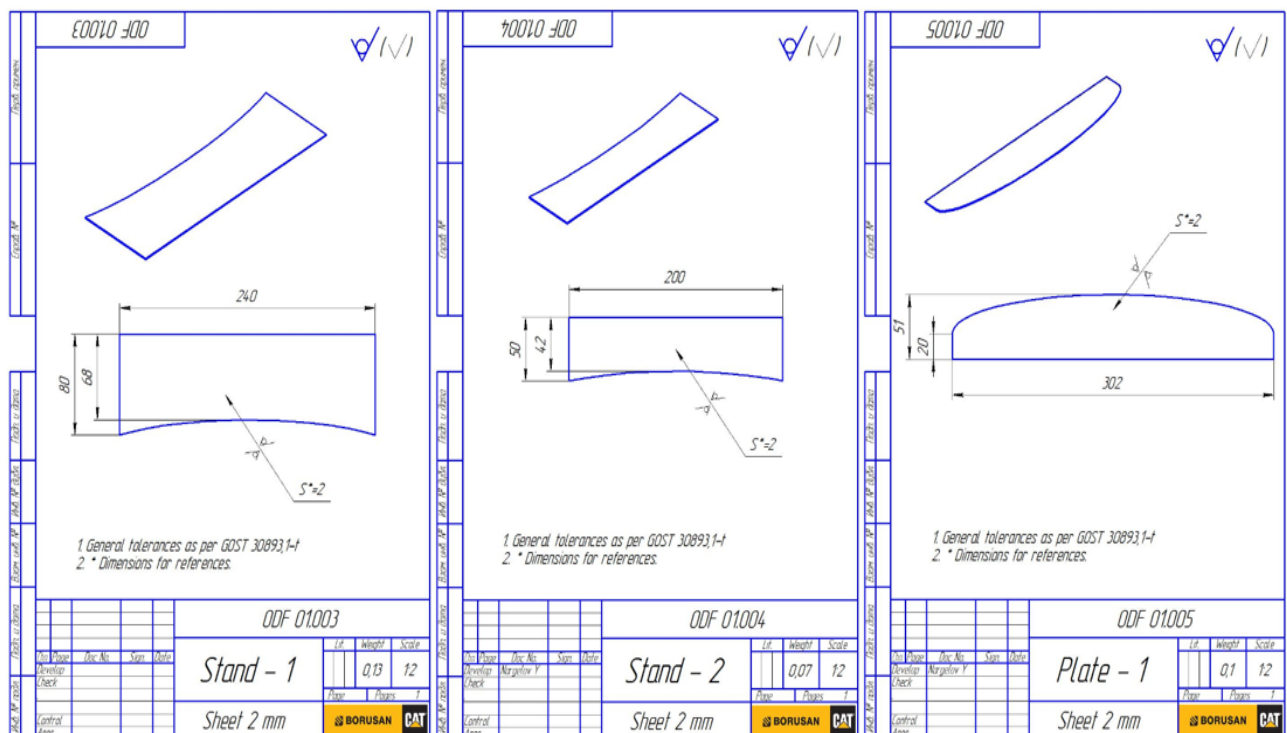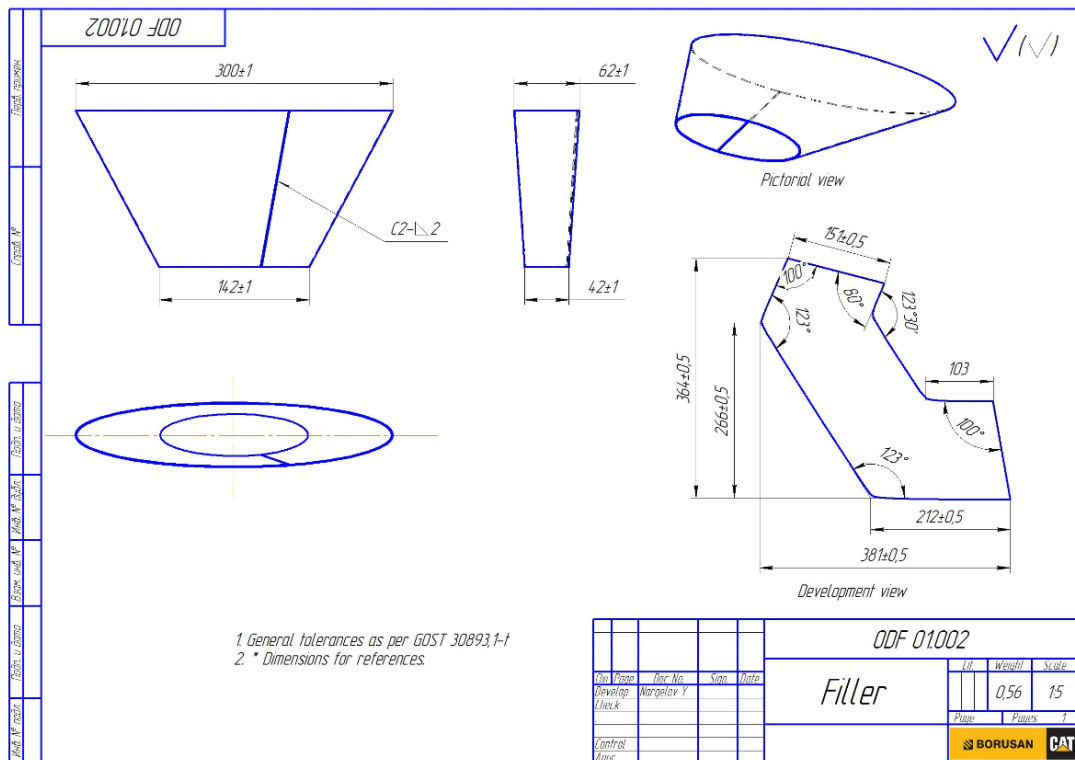

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Used Oil Drain Fixture For OHT Final Drives

DATE
12/17/2020

CHG
NO
00

NUMBER
1.01-201217-01

7.0 Related Best Practices

N/a.

8.0 Acknowledgements

The idea of creating & implementing this Best Practice belongs to:

Yernar NARGELOV
Service Engineer
Mining Division CSA and Service Standards
Borusan Makina Kazakhstan LLP
ynargelov@borusan.com

Azamat ORAZALINOV
Electrical & Gas Welder
Equipment Rebuild Shop (ERS)
Borusan Makina Kazakhstan LLP

Syrlan MYRZABEKOV
Technician
Machine Shop (MS)
Borusan Makina Kazakhstan LLP

This Best Practice was written by:
Gulnaz MANSUROVA
CRC Process Engineer
Borusan Makina Kazakhstan LLP
gmansurova@borusan.com
+7 (701) 951 98 14

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Used Oil Drain Fixture For OHT Final Drives

DATE
12/17/2020

CHG
NO
00

NUMBER
1.01-201217-01