



MINING DEALER BEST PRACTICE

740 Tire/Rim Remove & Install Supporting Tool

Maintenance and
Repair

Application

Component Life
Management

Component
Renewal (CRC)

MARC
Management

740 Tire/Rim Remove & Install Supporting Tool	0
1.0 Introduction	1
2.0 Best Practice Description	1
3.0 Implementation Steps	2
4.0 Benefits	3
5.0 Resources Required	3
6.0 Supporting Attachments / References	3
7.0 Related Best Practices	3
8.0 Acknowledgements	4

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices.” Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

January 2016
1510-3.04-1398

1.0 Introduction


Trakindo Equipment Management & Service Team of the Kaltim Prima Coal project has made a tool to safely, easily, and quickly remove and install tires from the rim of a 740 truck on site.

Previously, two technicians were needed to do this task. One technician to operate the tool and the other technician to hold the torque tool.

This supporting tool helps the service team remove and install tires from the rim quickly, safely and by using only the efforts of one technician. Moreover, this over can be modified for other models of trucks if it is required.

2.0 Best Practice Description

This tool consist of one main part: barrier

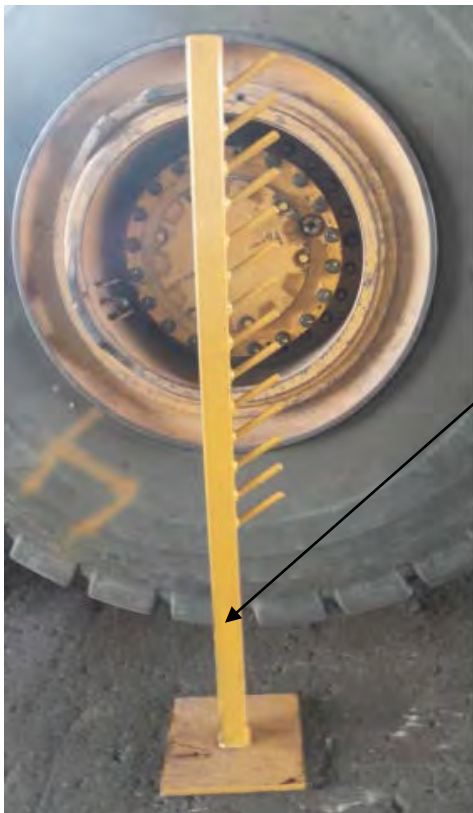

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR


740 Tire/Rim Remove & Install Supporting Tool

DATE
4/20/2016

CHG
NO
01

NUMBER
1510-3.04-1398

3.0 Implementation Steps

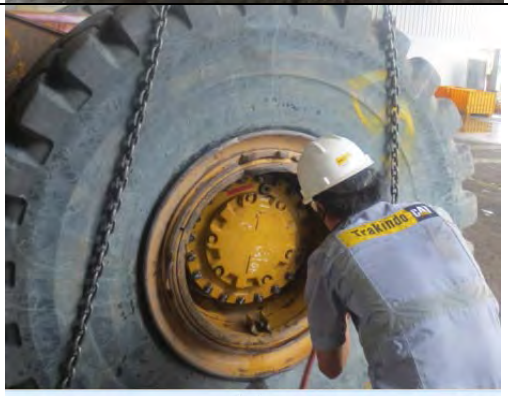Subject	Picture
1. Stand up the tire with the proper lifting chain.	
2. Install the tire on to the spindle carefully, and ensure all studs are placed.	
3. Install all nuts.	

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

740 Tire/Rim Remove & Install Supporting Tool

DATE
4/20/2016

CHG
NO
01

NUMBER
1510-3.04-1398

4. Place your fastening stand and the torque wrench in the proper slot.	
5. Ensure the torque wrench & the extension bar are 90° with the ground.	

4.0 Benefits

1. Safe, easy and quick removal and installation of tire from the rim in the workshop.
2. Efficient utilization of man hours (one technician is enough to do this task)
3. This tool can be modified for other models of trucks if it is required

5.0 Resources Required

1. Welding shop
2. Material and parts required is indicated in the drawings; see attached

6.0 Supporting Attachments / References

- DRAWING - 740 Tire-Rim Remove and Install supporting tool - Rev 01.pdf

7.0 Related Best Practices

N/A

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
740 Tire/Rim Remove & Install Supporting Tool	DATE 4/20/2016	CHG NO 01	NUMBER 1510-3.04-1398

8.0 Acknowledgements

The idea of creating and implementing this Best Practice belong to:

Bambang F Riyanto
Service Operation Dept Head
Trakindo at Kaltim Prima Coal site
brianto@trakindo.co.id
+62 811 580 9676

Cahyo Kurniawan
EM Dept Head
Trakindo at Kaltim Prima Coal site
cahyo.kurniawan@trakindo.co.id
+62 811 5811713

Rahman Samada
Service Supervisor
Trakindo at Kaltim Prima Coal site
rsamada@trakindo.co.id
+62 8125506519

Anton Firman Tama
Service Representative
Caterpillar Global Mining at Jakarta
anton.tama@cat.com
+62 81253322797

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

740 Tire/Rim Remove & Install Supporting Tool

DATE
4/20/2016

CHG
NO
01

NUMBER
1510-3.04-1398