



DEALER BEST PRACTICE SERIES

Plastic Media for Component Cleaning and Paint Removal

Application Maintenance Site Management **Component Rebuild** **Component Life Management** Safety MARC Management

Plastic Media for Component Cleaning and Paint Removal.....0

1.0 Introduction.....1

2.0 Best Practice Description.....2

3.0 Implementation Steps.....4

4.0 Benefits.....5

5.0 Resources Required6

6.0 Supporting Attachments / References6

7.0 Related Best Practices6

8.0 Acknowledgements.....6

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction

A new process to pre-clean and remove paint from major components has been implemented at Trakindo. This process uses a commercially available recycled ground plastic as a sand blast media. The plastic is ground into tiny particles with a consistency similar to sugar grains and is an excellent sand blast medium.

The plastic does not harm non-metallic parts such as plastic, rubber, and wiring harnesses. It also does not harm soft metals such as aluminum. It efficiently and effectively removes paint down to bare metal.

Superior finish

Cleaning sensitive areas with no damage !



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Plastic Media for Component Cleaning and Paint
Removal

DATE
2/18/2015

CHG
NO
01

NUMBER
1007-4.5-1092

Superior finish


Cleaning sensitive areas with no damage !

Example :
Plastic pipe clamp
insert is not
damaged



2.0 Best Practice Description

The cleaning process steps are as follows:

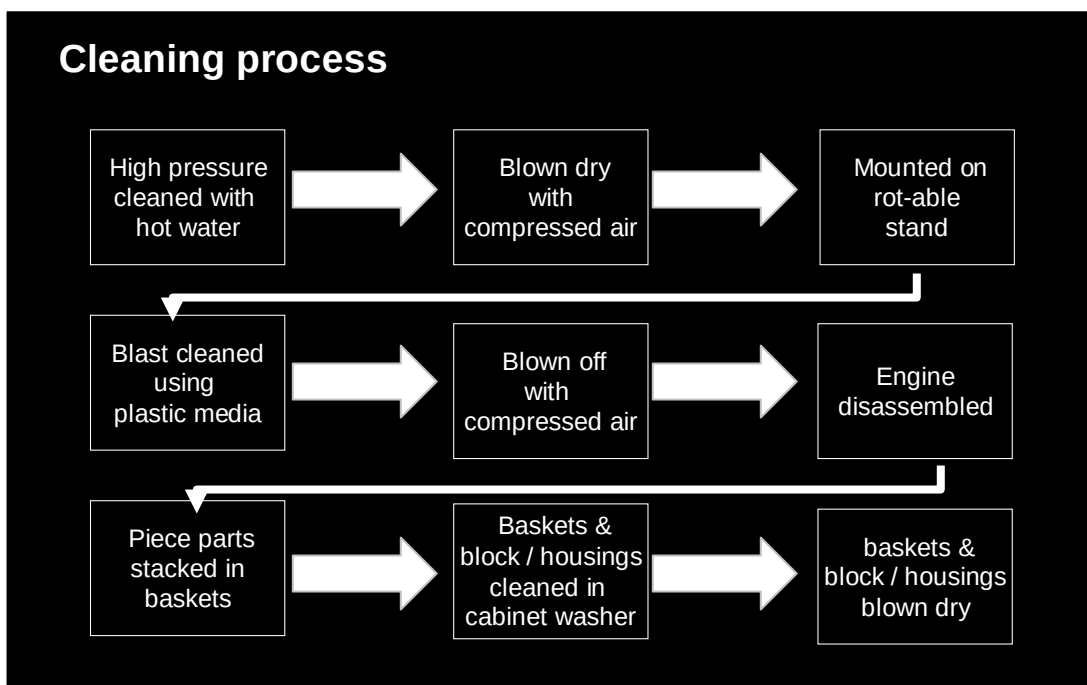

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Plastic Media for Component Cleaning and Paint Removal

DATE
2/18/2015

CHG
NO
01

NUMBER
1007-4.5-1092


Step one is to clean the component with high-pressure hot water and blow dry with compressed air.

Clean & dry – ready for blasting



Next, in the case of engines, the component is mounted on a rotating stand that can rotate the engine through 270 degrees. Custom adapters were made to accommodate a better degree of rotation. (See attachment for details).

Special stands can be locked

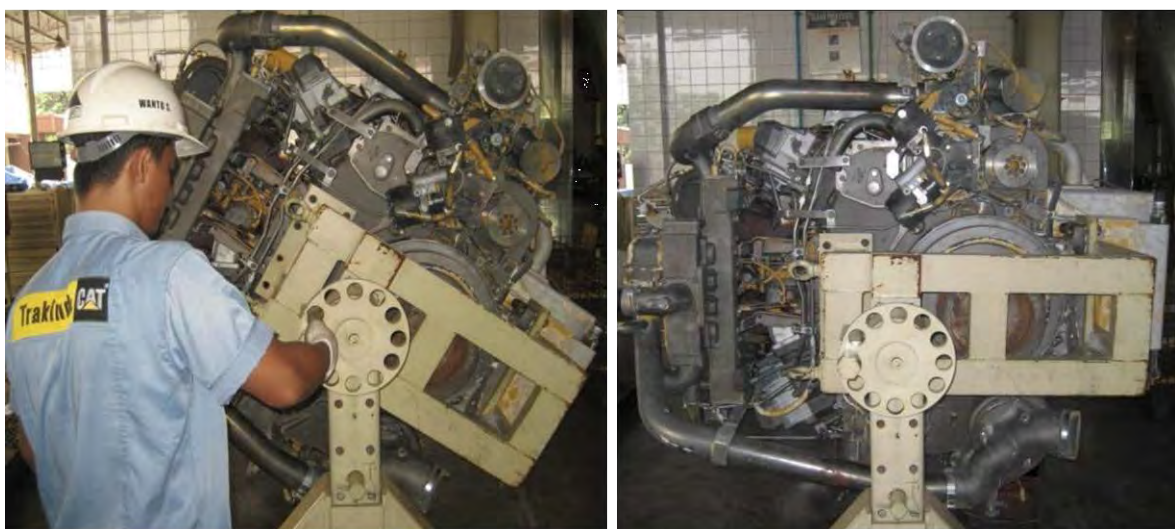

The component is then blasted using the plastic media and then blown off with compressed air.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Plastic Media for Component Cleaning and Paint
Removal

DATE
2/18/2015

CHG
NO
01

NUMBER
1007-4.5-1092

Blasted clean and dry – ready for disassembly




3.0 Implementation Steps

The supplier for the plastic media blast is Clemco Industries. Product information and list of distributors is available at their website:

<http://www.clemcoindustries.com/>

PLASTIC MEDIA

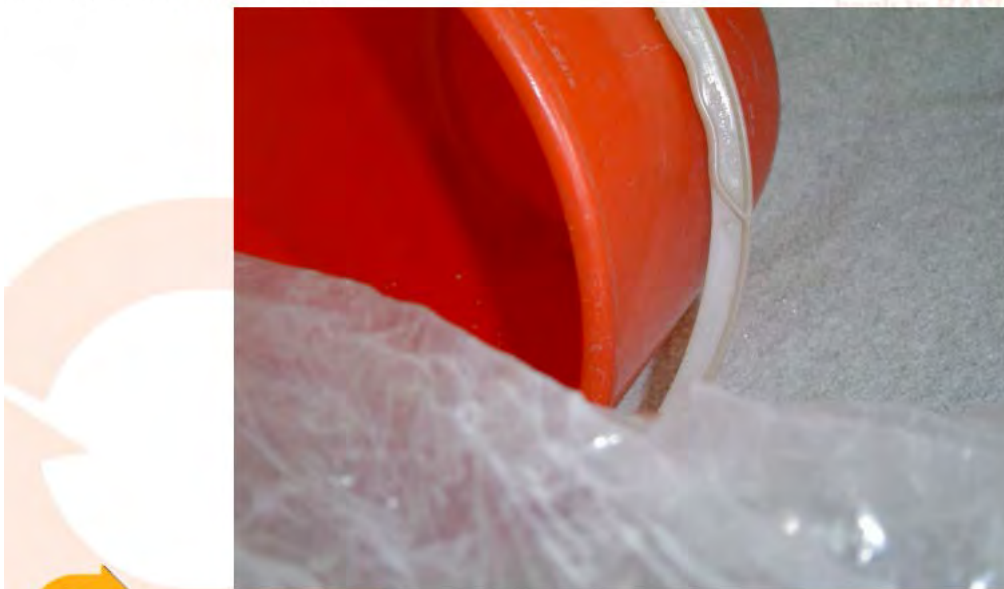

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Plastic Media for Component Cleaning and Paint
Removal

DATE
2/18/2015

CHG
NO
01

NUMBER
1007-4.5-1092

4.0 Benefits

Benefits of media blasting

- ✓ Total time to blast 1 X 793C engine - 8 hours [max]
- ✓ No paint removal / scrapping or grinding
- ✓ No harmful chemicals
- ✓ No fear of paint / dirt chips in assembly process
- ✓ No damage to wiring harnesses / aluminum / ID plates / clamps / plastic and fragile parts
- ✓ 100% perfect surface for paint application
- ✓ Professional finish / World Class product for increased customer value and confidence

Superior finish

Hardware returned to **as new** finish



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Plastic Media for Component Cleaning and Paint
Removal

DATE
2/18/2015

CHG
NO
01

NUMBER
1007-4.5-1092

5.0 Resources Required

Costs of media blasting

- ☐ Modifying the 4C9832 roll over stands including fabrication / equipment **US\$ 6,000.**
- ☐ Grit blast unit including all equipment [dual system for steel shot and plastic media / manual sweep / auto recycle] installation / roof & base **US\$ 27,500.**
- Total capital required = US\$ 33,500.**
- ☐ Media / shot / electricity / manpower per engine average **US\$ 420.+/- 50**

6.0 Supporting Attachments / References

Cleaning-Trakindo.ppt - PowerPoint file detailing the process

7.0 Related Best Practices

None at this time.

8.0 Acknowledgements

This Best Practice was written by:

Howard Standring
P.T. Trakindo Utama
+62 021 782 2373
howard.standring@trakindo.co.id

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Plastic Media for Component Cleaning and Paint Removal	DATE 2/18/2015	CHG NO 01	NUMBER 1007-4.5-1092