



DEALER BEST PRACTICE SERIES

Tool to Install
Transmission Control
Valve 383-7597 Ring
Retainer

Maintenance and Repair Application Component Life Management Component Renewal (CRC) MARC Management

Tool to Install Transmission Control Valve 383-7597
Ring Retainer0
1.0 Introduction1
2.0 Best Practice Description.....1
3.0 Implementation Steps4
4.0 Benefits.....4
5.0 Resources Required4
6.0 Supporting Attachments / References4
7.0 Related Best Practices5
8.0 Acknowledgements.....5

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network


1.0 Introduction

Caterpillar has changed the retainer ring for the transmission control spool valves. This new ring-retaining (Part number: 383-7597) is stronger, but the installation of this ring is more difficult. This Best Practice is a simple tool that facilitates the installation of the retainer ring while using the Caterpillar tool (Part number: 446-5933).

**Before****Now**

2.0 Best Practice Description

Ferreyros has developed a simple tool that compresses the spring spool, giving enough space for the installation of the retainer ring.

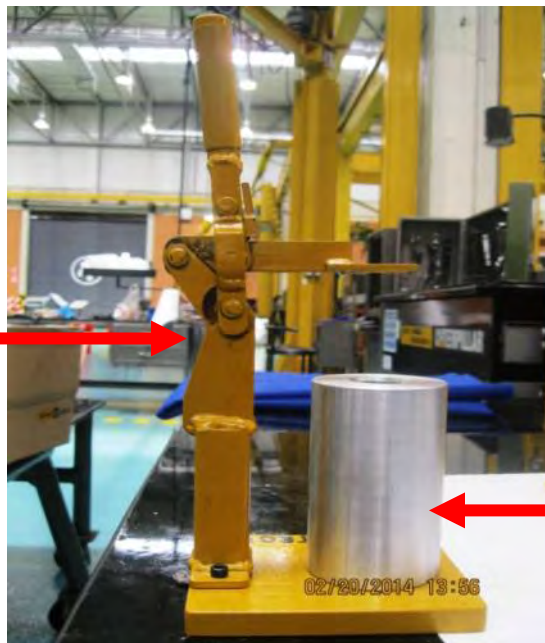Compressor**Bracket**


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tool to Install Transmission Control Valve 383-7597
Ring Retainer

DATE
2/18/2015

CHG
NO
00

NUMBER
1406-4.01-1342

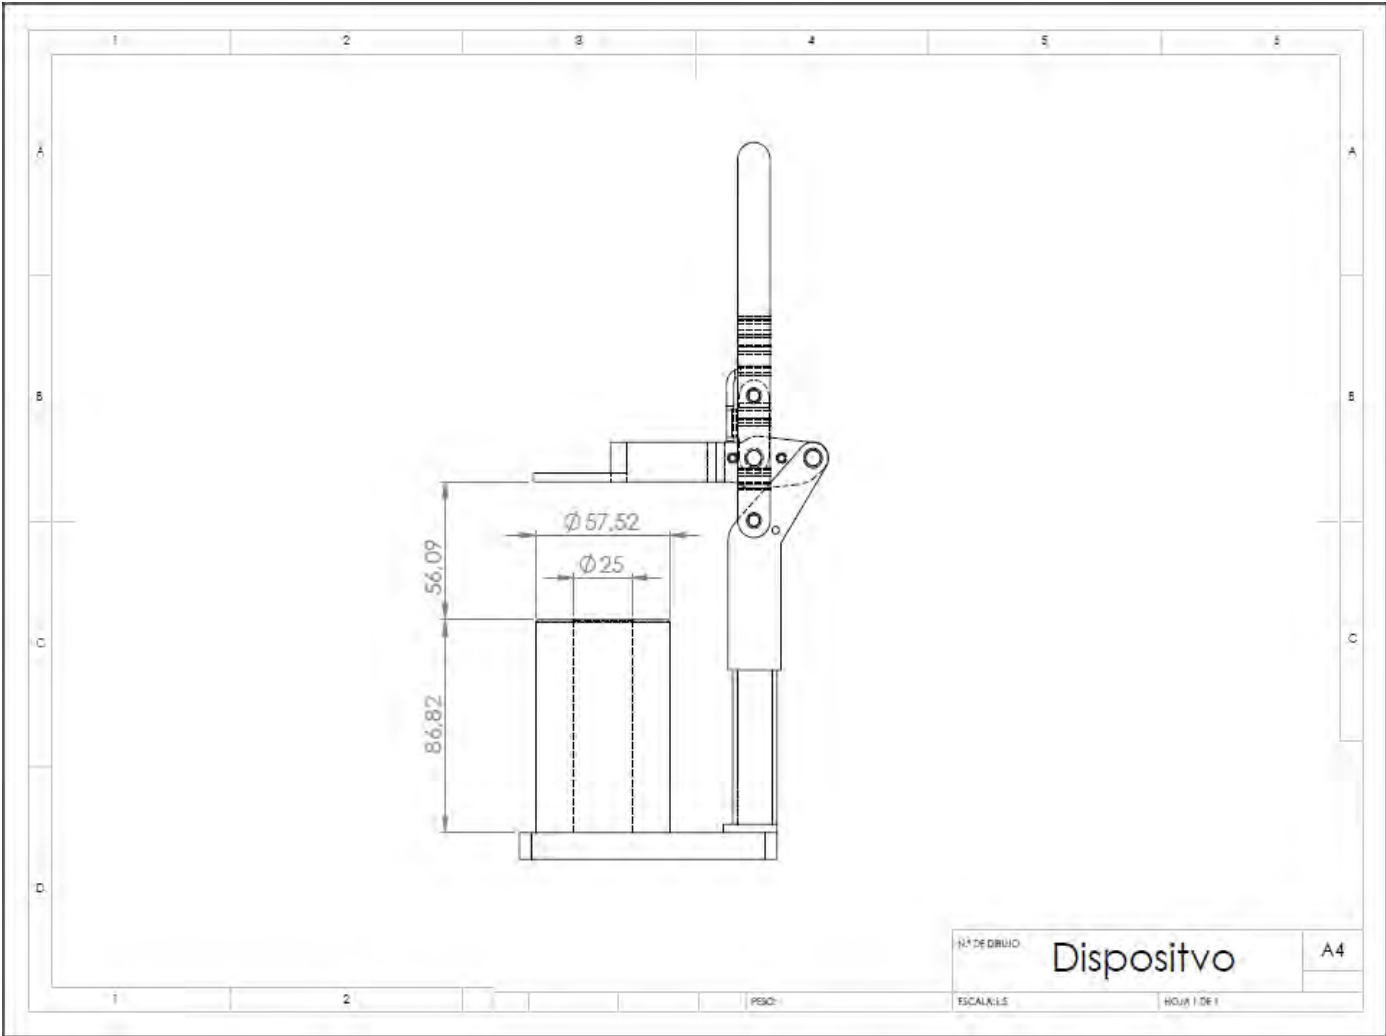

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR



Tool to Install Transmission Control Valve 383-7597
Ring Retainer

DATE
2/18/2015

CHG
NO
00

NUMBER
1406-4.01-1342

The technician must place the spool in the bracket hole and then press the spring with the compressor. The compressor tool locks into position allowing both hands free to insert the ring-retaining to spool with the use of CAT tools – cone and tube (Part number: 446-5933) and a hammer. After that, the assembled spool valve is removed from the tool.

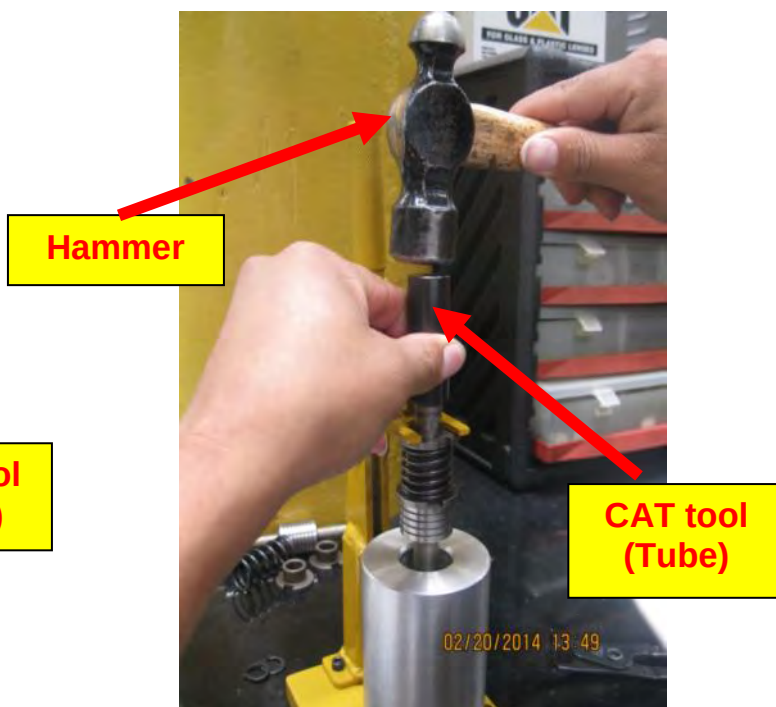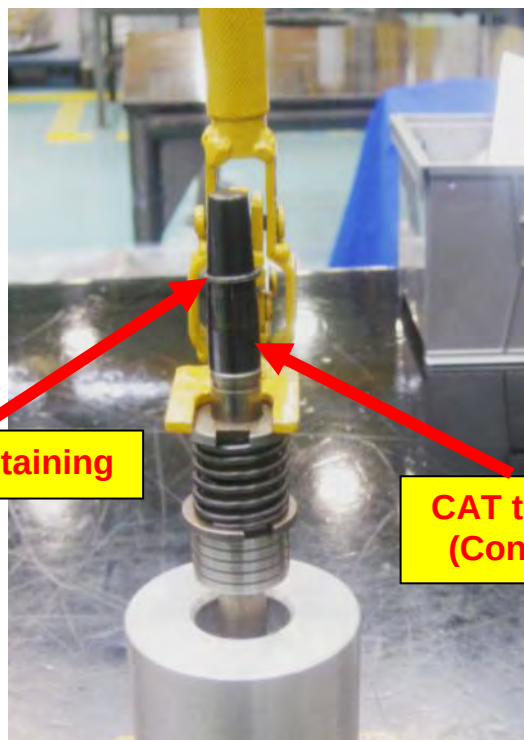

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tool to Install Transmission Control Valve 383-7597
Ring Retainer

DATE
2/18/2015

CHG
NO
00

NUMBER
1406-4.01-1342



3.0 Implementation Steps

Design and fabricate a tool as shown above.

4.0 Benefits

- Facilitates the installation of retainer ring.
- Less time required.

5.0 Resources Required

- Minimal expense to fabricate the tool.

6.0 Supporting Attachments / References

None

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Tool to Install Transmission Control Valve 383-7597 Ring Retainer	DATE 2/18/2015	CHG NO 00	NUMBER 1406-4.01-1342

7.0 Related Best Practices

None

8.0 Acknowledgements

This Best Practice was written by:

Aninu Mitacc
Ferreyros S.A.A.

The idea for this best practice belongs to:

Carlos Cossio
Ferreyros S.A.

Samuel Rosas
Ferreyros S.A.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tool to Install Transmission Control Valve 383-7597
Ring Retainer

DATE
2/18/2015

CHG
NO
00

NUMBER
1406-4.01-1342