



DEALER BEST PRACTICE SERIES

Disassemble / Assemble Tool for
793D/F Hub Brake

Maintenance and Repair Application Component Life Management Component Renewal (CRC) MARC Management

Disassemble / Assemble Tool for 793D/F Hub Brake

.....0

1.0 Introduction1

2.0 Best Practice Description.....1

3.0 Implementation Steps.....3

4.0 Benefits3

5.0 Resources Required3

6.0 Supporting Attachments / References.....3

7.0 Related Best Practices3

8.0 Acknowledgements.....3



DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction

Ferreyros has developed an adjustable tool to improve the 793D / F brake hub disassembly and assembly process. The tool adjusts to grip the brake hub securely so it can be easily and efficiently removed or installed.

2.0 Best Practice Description

Since tool prints are not currently available, the following photos show the fixture and process.

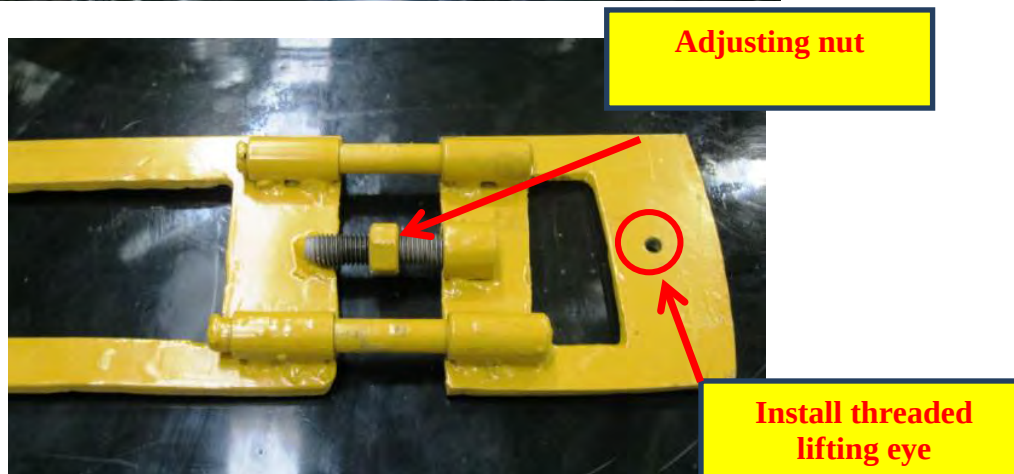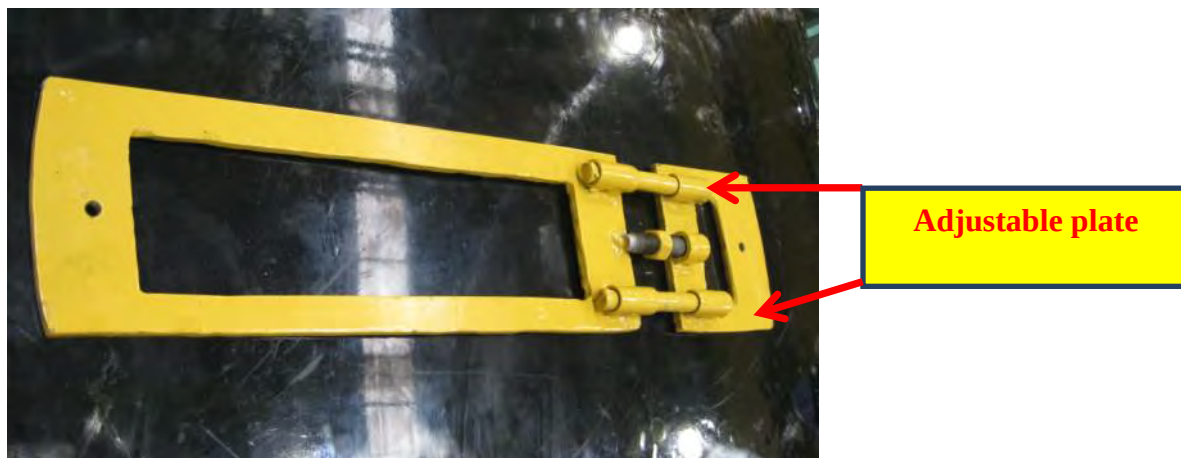

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR


Disassemble / Assemble Tool for 793D/F Hub Brake

DATE
2/18/2015

CHG
NO
00

NUMBER
1206-4.03-1277

The tool is designed to fit easily into the brake hub and adjust to a firm grip. This tool helps to prevent damage due to handling during brake removal and installation.

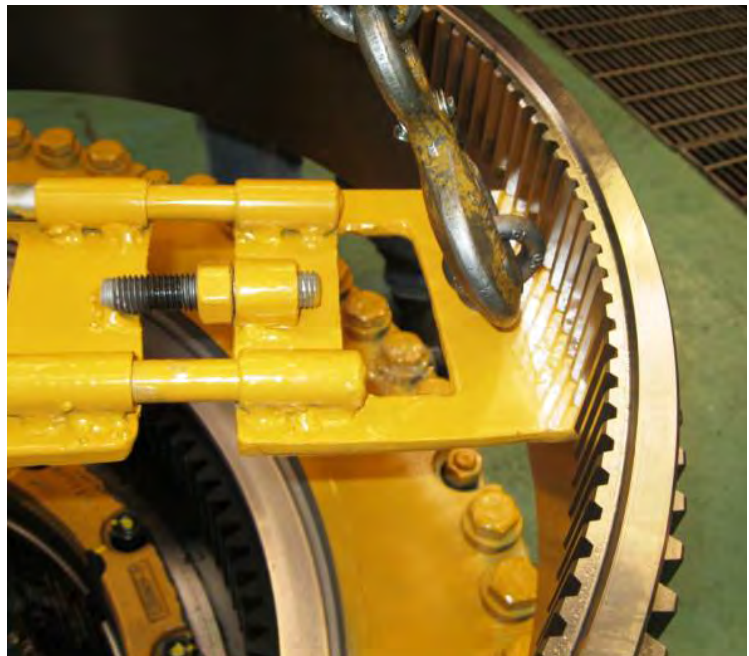

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Disassemble / Assemble Tool for 793D/F Hub Brake

DATE
2/18/2015

CHG
NO
00

NUMBER
1206-4.03-1277

3.0 Implementation Steps

Design a tool.

4.0 Benefits

- More efficient- quicker and easier assembly and disassembly.
- Reduces possibility of handling damage.
- Improved technician ergonomics.

5.0 Resources Required

Minimal expense to fabricate the tool.

6.0 Supporting Attachments / References

None

7.0 Related Best Practices

None

8.0 Acknowledgements

The idea for this Best Practice belongs to:

Victor Rodriguez Epiquen
Ferreyros SAA

This Best Practice was revised by:

Aninu Mitacc Vizcardo
Ferreyros S.A.A.
Aninu.mitacc@ferreyros.com.pe

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Disassemble / Assemble Tool for 793D/F Hub Brake

DATE
2/18/2015

CHG
NO
00

NUMBER
1206-4.03-1277