



DEALER BEST PRACTICE SERIES

Gauge for Measuring Duo Cone Seal Ramp Wear

Maintenance and Repair	Application	Component Life Management	Component Renewal (CRC)	MARC Management
				Gauge for Measuring Duo Cone Seal Ramp Wear.....0
				1.0 Introduction1
				2.0 Best Practice Description.....1
				3.0 Implementation Steps.....2
				4.0 Benefits3
				5.0 Resources Required3
				6.0 Supporting Attachments / References.....3
				7.0 Related Best Practices3
				8.0 Acknowledgements.....3

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction

During final drive rebuild, it is necessary to inspect and evaluate the duo cone seal ramp for reusability or salvage according to SEBF8132. This Best Practice is a simple gauge that can be fabricated and used by a technician to quickly and accurately evaluate the seal ramp.

2.0 Best Practice Description

The key dimensions of the duo cone that need to be checked are shown in Figure 1 below. These checks are required to determine if the ramp can be reused, salvaged, or must be replaced.

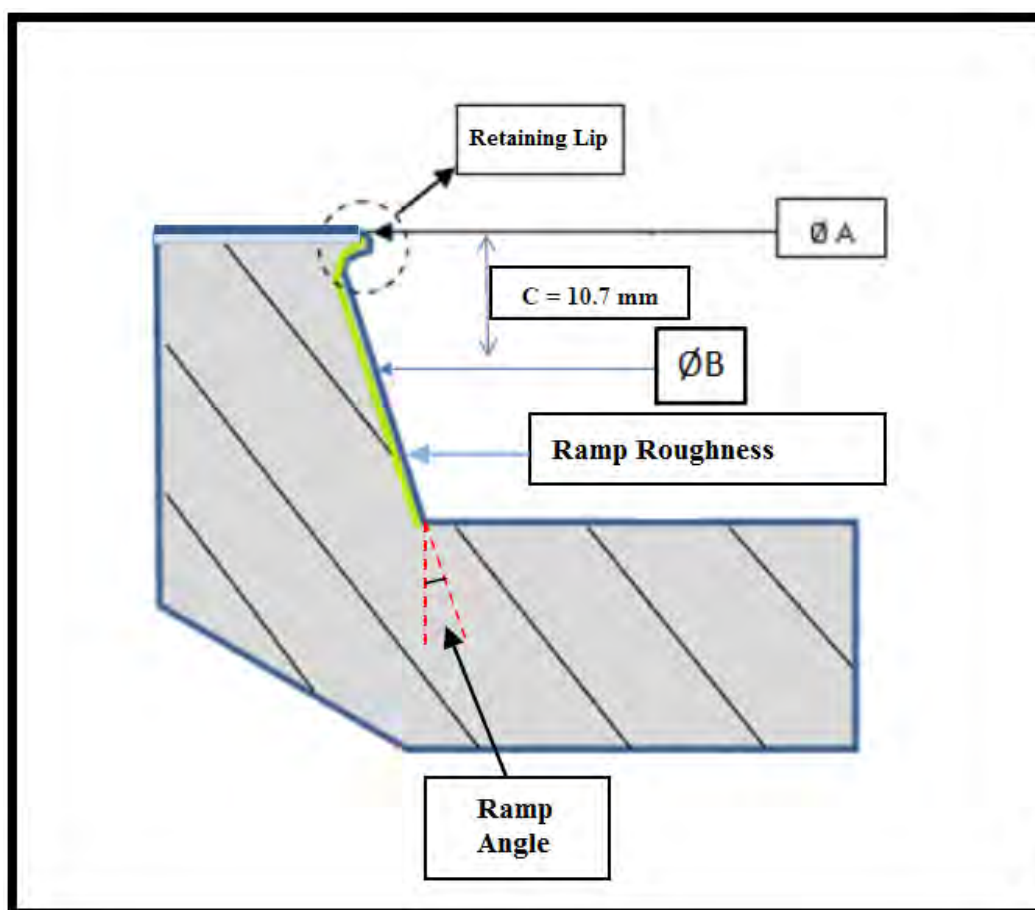


Figure 1. Duo Cone Seal Dimensions and Measures

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Comparison Rule Used To Measure Wear of Duo Cone
Seal Ramp

DATE
2/19/2015

CHG
NO
00

NUMBER
1210-4.03-1291

This Best Practice is to fabricate a gauge with the profile of the duo cone seal ramp. See Figure 2 below.



Picture 2. Gauge rule 10°

3.0 Implementation Steps

- Fabricate a gauge.
- Locate the duo cone seal ramp in the component.
- Place the gauge in the duo cone profile (See Figure 3 and 4 below).
- Use a light to check for any gaps between the gauge and the ramp. That light represents the wear on the ramp.



Figure 3.



Figure 4

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Comparison Rule Used To Measure Wear of Duo Cone
Seal Ramp

DATE
2/19/2015

CHG
NO
00

NUMBER
1210-4.03-1291

4.0 Benefits

- Quickly measure ramp wear and angle.
- Consistency in the inspection.
- Proper reuse and salvage decisions

5.0 Resources Required

- Fabrication shop

6.0 Supporting Attachments / References

SEBF8132

7.0 Related Best Practices

None

8.0 Acknowledgements

This Best Practice was written by:

Name Frank Córdova R.
 Title Green Belt CPS
 E mail frank.cordova@ferreyros.com.pe

Recognition:

Team: Miguel Mauriola / Operations Support Chief
 Raul Padilla, Roberto Tufiño / Quality control Supervisor
 Carlos Espinoza / Operations Support technical communicator
 Quality inspectors.

Sponsor: Rodolfo Gerstein / Manager Machine Shop

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Comparison Rule Used To Measure Wear of Duo Cone Seal Ramp	DATE 2/19/2015	CHG NO 00	NUMBER 1210-4.03-1291
--	-------------------	-----------------	--------------------------