



DEALER BEST PRACTICE SERIES

Tooling for Deburring Cylinder Block Top Deck after Machining

Maintenance and Repair Application Component Life Management Component Renewal (CRC) MARC Management

Tooling for Deburring Cylinder Block Top Deck after Machining.....0

1.0 Introduction.....1

2.0 Best Practice Description.....1

3.0 Implementation Steps.....2

4.0 Benefits.....3

5.0 Resources Required.....3

6.0 Supporting Attachments / References.....3

7.0 Related Best Practices.....3

8.0 Acknowledgements.....4

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

VENDOR DISCLAIMER STATEMENT

Although Caterpillar does not endorse this particular supplier, Ferreyros has experience with the following products or companies. We welcome additional supplier recommendations from our dealer network.

1.0 Introduction

A new tool which improves the deburring of the top deck surface in engine block 3500 has been implemented at the machining workshop in Ferreyros S.A. The tool is a Lessmann nylon abrasive bristle disc.

2.0 Best Practice Description

Previously, the deburring process of top deck surface was a manual process using rasps and hand deburring tools. It took three hours approximately. The new process using an abrasive bristle disc (See the picture 1) has reduced the top deck surface deburring time by 90% (15 minutes approximately). In addition, manual deburring was performed using three technicians, but now requires only one.



Picture 1. Abrasive bristle disc

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tooling for Deburring Cylinder Block Top Deck after
Machining

DATE
10/12/2015

CHG
NO
01


NUMBER
1302-4.02-1312

The brand and specifications of the abrasive bristle disc are shown below:

- Trademark: LESSMANN.
- Code: 405.850 - Abrasive nylon SIC K 120 x 0,6mm.
- Dimensions: 400 x 25 mm
- Trim: 25 mm
- Bore: 50 mm

3.0 Implementation Steps

- After machining the top deck surface, install an abrasive bristle disc on the milling machine (Rottler F99Y in this case - See the picture 2).

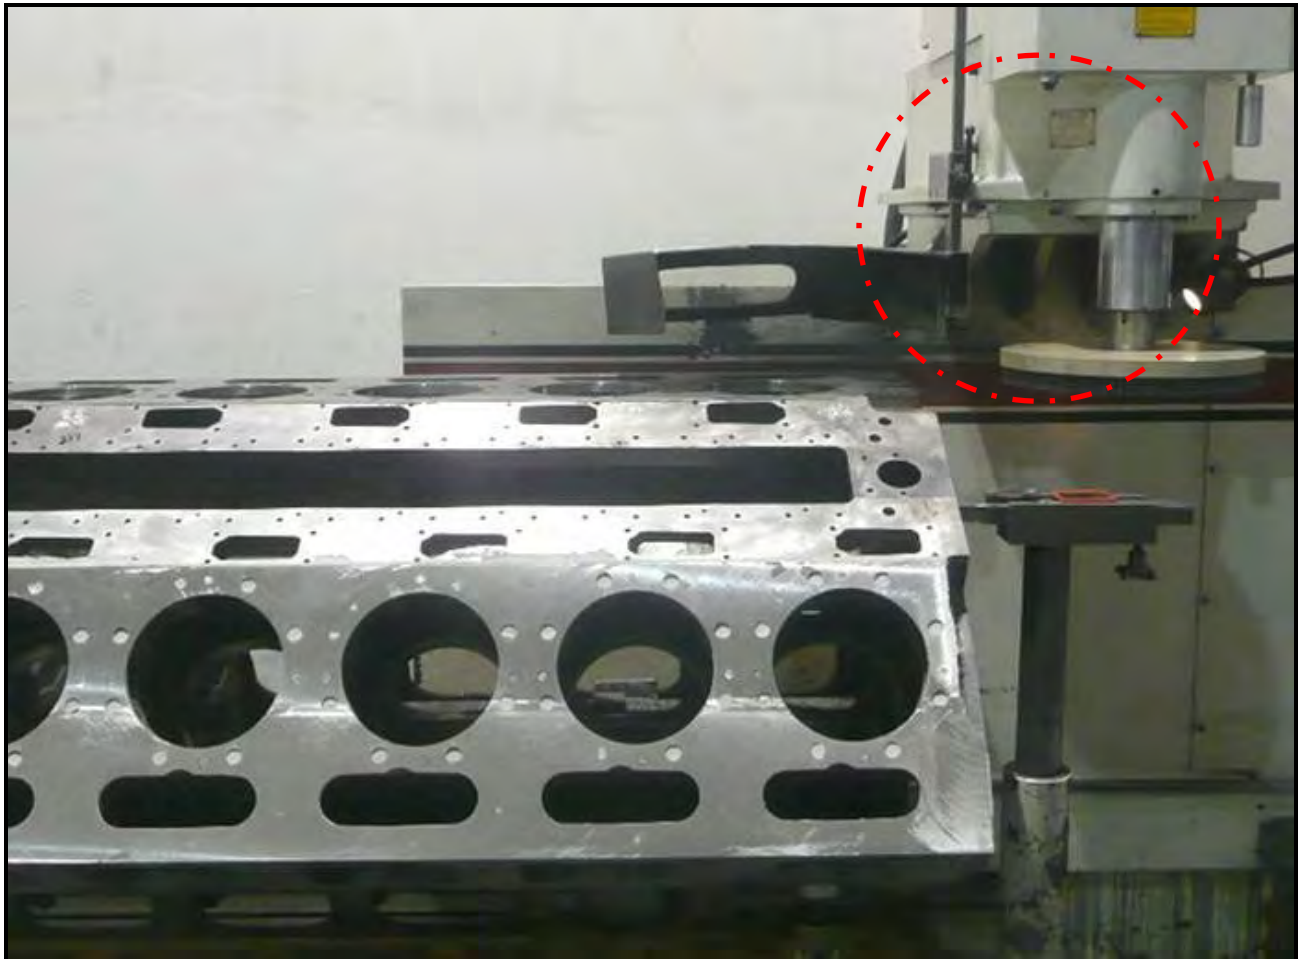

Picture 2. Abrasive bristle disc installed.

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tooling for Deburring Cylinder Block Top Deck after
Machining

DATE
10/12/2015

CHG
NO
01

NUMBER
1302-4.02-1312

- In order to eliminate edges and burrs as a result of grinding, a pass using the abrasive disc is performed rotating at a speed between 600 – 700 rpm.



Picture 3. Starting with the deburring

4.0 Benefits

- Reduce the top deck surface deburring time by 90%.
- Reduce the use of labor by 60%.

5.0 Resources Required

None

6.0 Supporting Attachments / References

None

7.0 Related Best Practices

None

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tooling for Deburring Cylinder Block Top Deck after Machining	DATE 10/12/2015	CHG NO 01	NUMBER 1302-4.02-1312
---	--------------------	-----------------	--------------------------

8.0 Acknowledgements

This Best Practice was written by:

Name Frank Córdova R.

E mail frank.cordova@ferreyros.com.pe

Recognition:

Team: Miguel Mauriola / Operations Support Chief
Frank Córdova / Operations Support Assistant
José Huayamis / Technical Communicator
Owner: Rafael Volta / Machine Shop Chief
Sponsor: Rodolfo Gerstein / Manager Machine Shop

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Tooling for Deburring Cylinder Block Top Deck after Machining	DATE 10/12/2015	CHG NO 01	NUMBER 1302-4.02-1312
---	--------------------	-----------------	--------------------------