



DEALER BEST PRACTICE SERIES

Fixture for 3500 Cylinder
Head Machining

Maintenance and Repair Application Component Life Management Component Renewal (CRC) MARC Management

Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

1.0	Introduction.....	0
2.0	Best Practice Description	1
3.0	Implementation Steps.....	2
4.0	Benefits	4
5.0	Resources Required.....	4
6.0	Supporting Attachments / References	5
7.0	Related Best Practices	5
8.0	Acknowledgements	6

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices”. Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

1.0 Introduction

A new device in order to improve machining of head as cylinder series 3500 has been implemented at the Machining Workshop in Ferreyros S.A.

2.0 Best Practice Description

The focus of this Best Practice is reduce the centering time during the rebuilding of cylinder head at the Milling Machine. This kind of device is mounted on the table of the milling machine and tightened by four fixation devices. The adjustment fixation device must be tightened very slowly and accurate (See the picture 1).



Picture 1. Centering Device

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

DATE
6/9/2017

CHG
NO
00

NUMBER
1210-4.04-1288

Before the implementation of this Best Practice, the average time of centering was 20 min, but now using this kind of device the new time of centering is 5 min. So, there is a 75% reduction of centering time.

3.0 Implementation Steps

- Put and Tighten the device on the table of milling machine (See the picture 2)



Picture 2. Adjusted device

- Mount the head of cylinder on the device using a stud, which it goes through the part (See the picture 3).



(1)



(2)


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

DATE
6/9/2017

CHG
NO
00

NUMBER
1210-4.04-1288

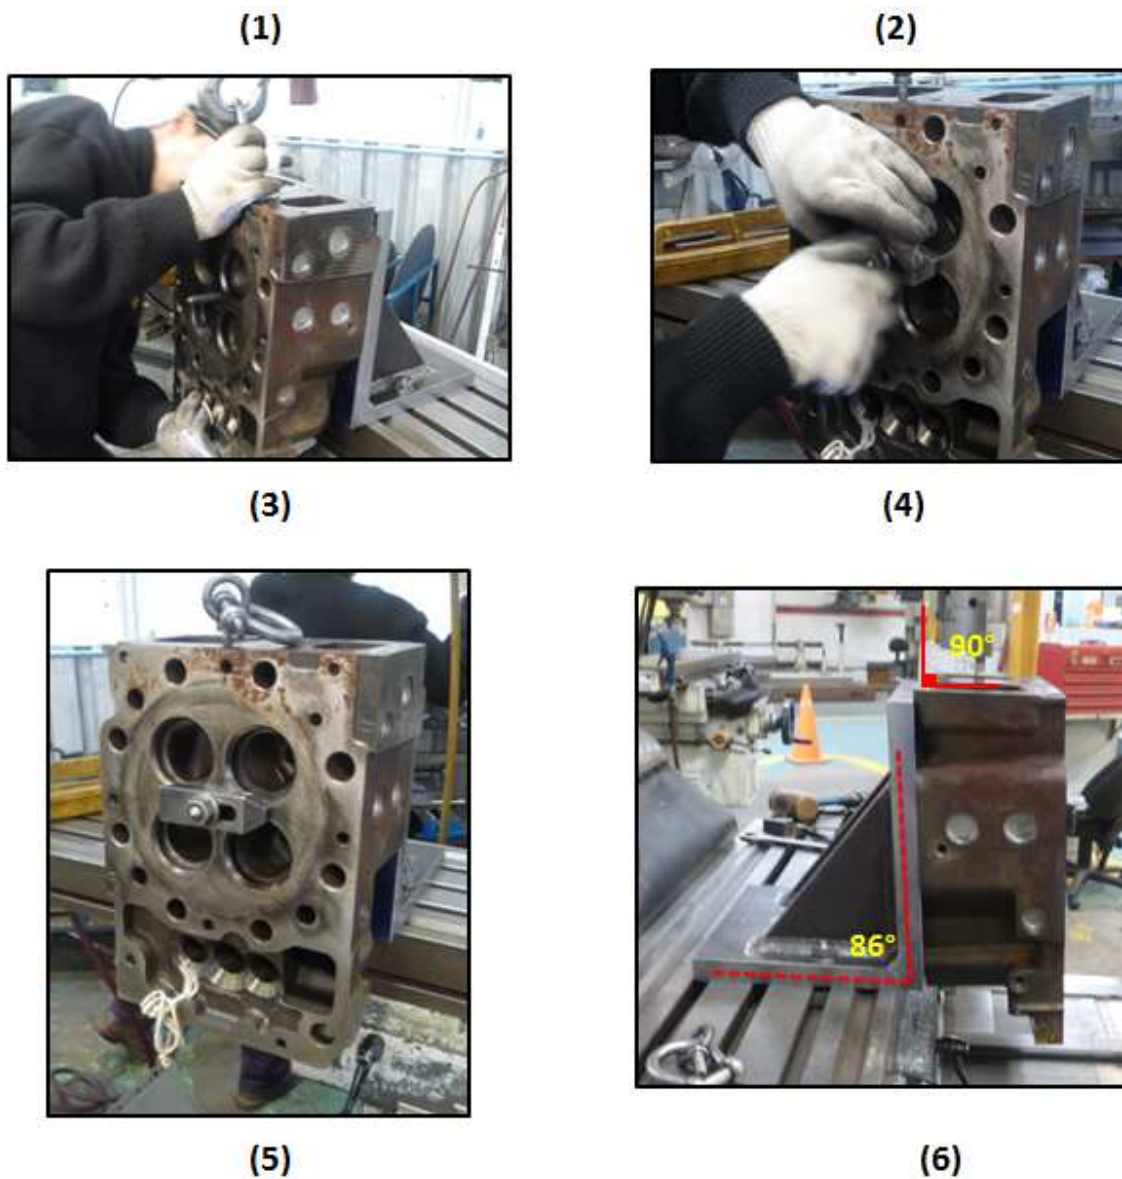

Picture 3. Steps to Tighten the head as cylinder

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR


Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

DATE
6/9/2017

CHG
NO
00

NUMBER
1210-4.04-1288

- Machine the top surface of the part (See the picture 4).

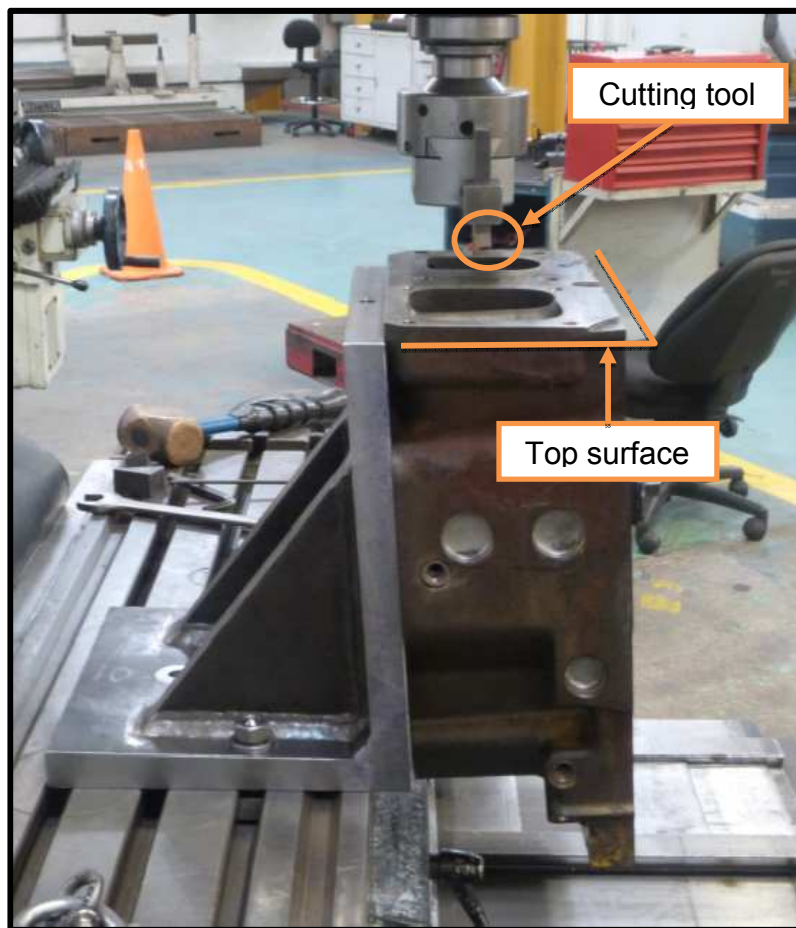

Picture 4. Steps to Tighten

4.0 Benefits

- Reduce centering time of cylinder head on the milling machine by 75%.
- Machining accuracy of top surface head as cylinder.

5.0 Resources Required

- Fabrication shop
- Device specification are showed in the picture 5.


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

DATE
6/9/2017

CHG
NO
00

NUMBER
1210-4.04-1288

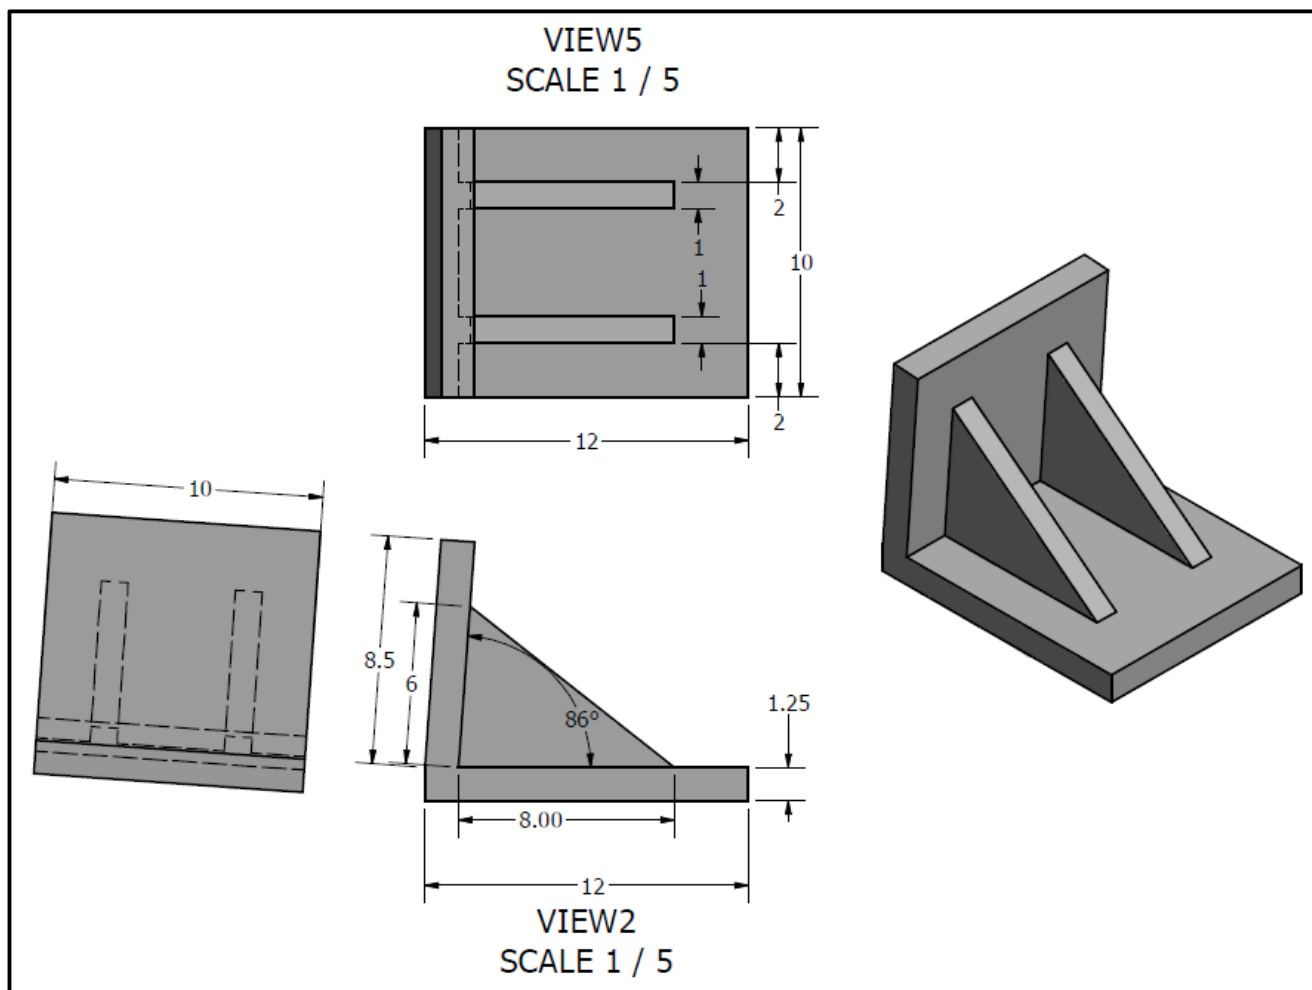

Picture 5. Device Specification

6.0 Supporting Attachments / References

None

7.0 Related Best Practices

None

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Centering Device In Order To Improve Machining Of
Cylinder Head Series 3500

DATE
6/9/2017

CHG
NO
00

NUMBER
1210-4.04-1288

8.0 Acknowledgements

This Best Practice was written by:

Name Frank Córdova R.

E mail frank.cordova@ferreyros.com.pe

Recognition:

Team: Miguel Mauriola / Operations Support Chief
Rafael Volta / Machine Chief
Romulo Olarte / Machine Supervisor
Sponsor: Rodolfo Gerstein / Manager Machine Shop

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Centering Device In Order To Improve Machining Of Cylinder Head Series 3500	DATE 6/9/2017	CHG NO 00	NUMBER 1210-4.04-1288
--	------------------	-----------------	--------------------------