

Electrical Characteristics:

Current rating: 0.4A AC/DC

Voltage rating: 50V AC/DC

Temperature range: -25°C~+85°C

Withstand Voltage: 500V AC/Minute

Contact Resistance: $\leq 20m\Omega$

Insulation resistance: $\geq 500M\Omega$

Relative Humidity: 93%+40°C





Material Description:

Terminal: Phosphor Bronze Tin-plated

Fitting Nail: Brass Tin-plated

Housing: Thermoplastic(UL94V-0)

Slider: Thermoplastic(UL94V-0)

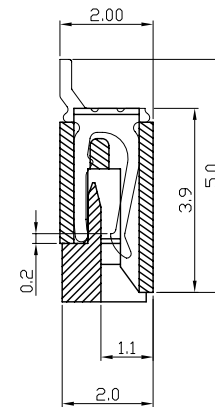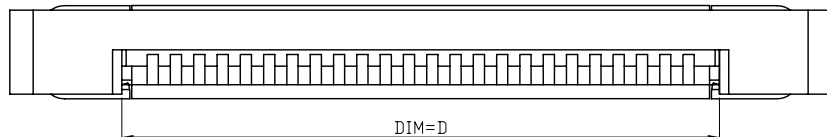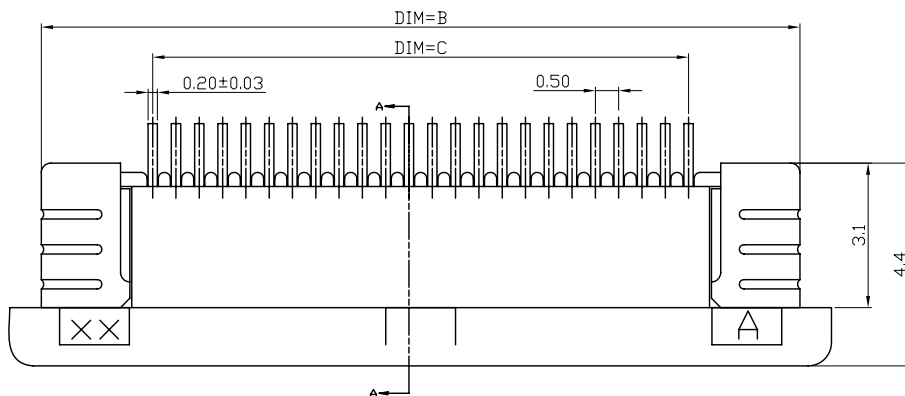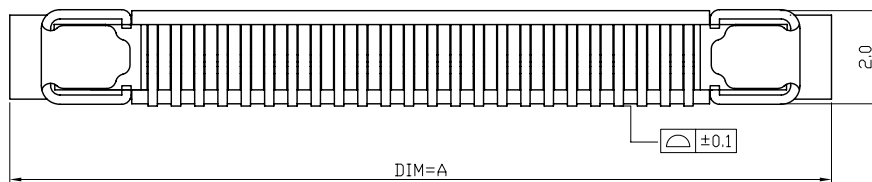

SECTION A-A

上接触




PIN数	DIM=A	DIM=B	DIM=C	DIM=D
34P	22.60	21.50	16.50	17.65
33P	22.10	21.00	16.00	17.15
32P	21.60	20.50	15.50	16.65
31P	21.10	20.00	15.00	16.15
30P	20.60	19.50	14.50	15.65
29P	20.10	19.00	14.00	15.15
28P	19.60	18.50	13.50	14.65
27P	19.10	18.00	13.00	14.15
26P	18.60	17.50	12.50	13.65
25P	18.10	17.00	12.00	13.15
24P	17.60	16.50	11.50	12.65
23P	17.10	16.00	11.00	12.15
22P	16.60	15.50	10.50	11.65
21P	16.10	15.00	10.00	11.15
20P	15.60	14.50	9.50	10.65
19P	15.10	14.00	9.00	10.15
18P	14.60	13.50	8.50	9.65
17P	14.10	13.00	8.00	9.15
16P	13.60	12.50	7.50	8.65
15P	13.10	12.00	7.00	8.15
14P	12.60	11.50	6.50	7.65
13P	12.10	11.00	6.00	7.15
12P	11.60	10.50	5.50	6.65
11P	11.10	10.00	5.00	6.15
10P	10.60	9.50	4.50	5.65
9P	10.10	9.00	4.00	5.15
8P	9.60	8.50	3.50	4.65
7P	9.10	8.00	3.00	4.15
6P	8.60	7.50	2.50	3.65

0.5mm Pitch 2.0mm High Drawer touch up

					UNLESS OTHERWISE SPECIFIED		APPROVED		DATE	PART NO	
					TOLERANCES ARE		CHECKED		DATE	DRAWING NO	
					X.X ±0.15		DRAWN		DATE	COMPUTER NO	
					X.XX ±0.10		NUMBER		SCALE	SIZE	NAME
					X.XXX ±0.05				1:1	A4	FPC0.5接拔式上接成品图
					ANG. ±0°30'						REV
SER	AREA	REVISIONS	CHK	DATE	UNIT						A
					MM						


 深圳市联泽瑞科技有限公司
SHENZHEN LIANZERUI TECHNOLOGY CO.,LTD.

PFC052002-XXUT

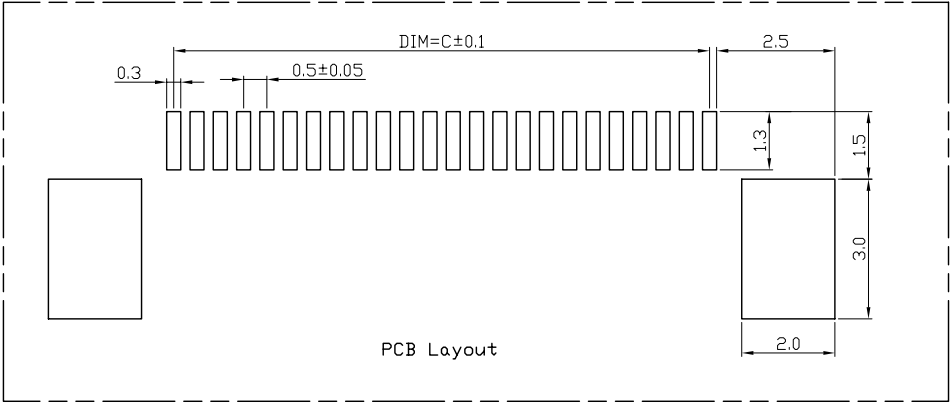





Electrical Characteristics:
Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤20mΩ
Insulation resistance: ≥500MΩ
Relative Humidity: 93%+40°C

Material Description:
Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

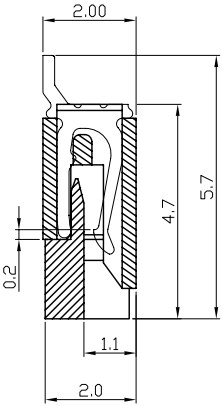

SECTION A-A

上接触

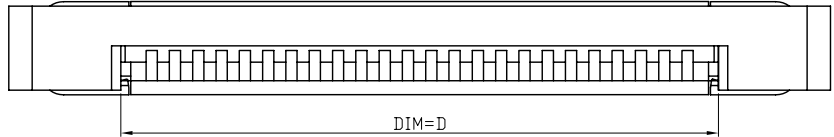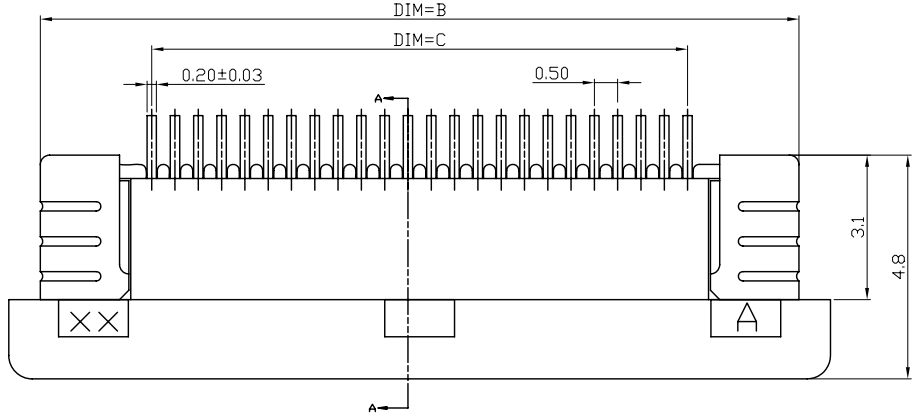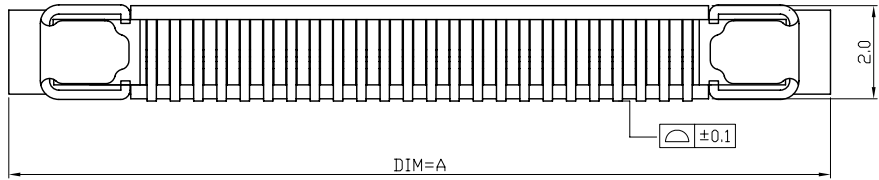

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
60P	35.60	34.50	29.50	30.65
59P	35.10	34.00	29.00	30.15
58P	34.60	33.50	28.50	29.65
57P	34.10	33.00	28.00	29.15
56P	33.60	32.50	27.50	28.65
55P	33.10	32.00	27.00	28.15
54P	32.60	31.50	26.50	27.65
53P	32.10	31.00	26.00	27.15
52P	31.60	30.50	25.50	26.65
51P	31.10	30.00	25.00	26.15
50P	30.60	29.50	24.50	25.65
49P	30.10	29.00	24.00	25.15
48P	29.60	28.50	23.50	24.65
47P	29.10	28.00	23.00	24.15
46P	28.60	27.50	22.50	23.65
45P	28.10	27.00	22.00	23.15
44P	27.60	26.50	21.50	22.65
43P	27.10	26.00	21.00	22.15
42P	26.60	25.50	20.50	21.65
41P	26.10	25.00	20.00	21.15
40P	25.60	24.50	19.50	20.65
39P	25.10	24.00	19.00	20.15
38P	24.60	23.50	18.50	19.65
37P	24.10	23.00	18.00	19.15
36P	23.60	22.50	17.50	18.65
35P	23.10	22.00	17.00	18.15

0.5mm Pitch 2.0mm High Drawer touch up

					UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		APPROVED		DATE		PART NO	
					X.X ±0.15						PFC052002-XXUT	
					X.XX ±0.10		CHECKED		DATE		DRAWING NO	
					X.XXX		DRAWN		DATE		COMPUTER NO	
					ANG. ±0°30'							
					UNIT		NUMBER		SCALE		SIZE	
					MM				1:1		A4	
											NAME	
											FPC0.5接拔式上接成品图	
											REV	
											A	