8-bit serial-in/serial or parallel-out shift register with output latches; 3-state

74HC/HCT595

FEATURES

- 8-bit serial input
- 8-bit serial or parallel output
- Storage register with 3-state outputs
- Shift register with direct clear
- 100 MHz (typ) shift out frequency
- Output capability:
  - parallel outputs; bus driver
  - serial output; standard
- I_{CC} category: MSI.

APPLICATIONS

- Serial-to-parallel data conversion
- Remote control holding register.

DESCRIPTION

The 74HC/HCT595 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL (LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The "595" is an 8-stage serial shift register with a storage register and 3-state outputs. The shift register and storage register have separate clocks.

Data is shifted on the positive-going transitions of the SH_{CP} input. The data in each register is transferred to the storage register on a positive-going transition of the ST_{CP} input. If both clocks are connected together, the shift register will always be one clock pulse ahead of the storage register.

The shift register has a serial input (D_S) and a serial standard output (Q_7') for cascading. It is also provided with asynchronous reset (active LOW) for all 8 shift register stages. The storage register has 8 parallel 3-state bus driver outputs. Data in the storage register appears at the output whenever the output enable input (OE) is LOW.

QUICK REFERENCE DATA

GND = 0 V; T_{amb} = 25 °C; $t_r = t_f$ = 6 ns.

SYMBOL	PARAMETER	CONDITIONS	TYP.		UNIT
			HC	HCT	
t_{PHL}/t_{PLH}	propagation delay SH_{CP} to Q_7' ST_{CP} to Q_n $\overline{MR}$ to Q_7'	C_L = 15 pF V_{CC} = 5 V	16 17 14	21 20 19	ns ns ns
f_{max}	maximum clock frequency SH_{CP}, ST_{CP}		100	57	MHz
C_I	input capacitance		3.5	3.5	pF
C_{PD}	power dissipation capacitance per package	notes 1 and 2	115	130	pF

Notes

C_{PD} is used to determine the dynamic power dissipation (P_D in μW):

$P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz C_L = output load capacitance in pF

f_o = output frequency in MHz V_{CC} = supply voltage in V

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

For HC the condition is V_I = GND to V_{CC}

For HCT the condition is V_I = GND to V_{CC} - 1.5 V.

ORDERING INFORMATION

EXTENDED TYPE NUMBER	PACKAGE			
	PINS	PIN POSITION	MATERIAL	CODE
74HC/HCT595N	16	DIL	plastic	SOT38Z
74HC/HCT595D	16	SO16	plastic	SOT109A

PINNING

SYMBOL	PIN	DESCRIPTION
Q_0 - Q_7	15, 1 - 7	parallel data output
GND	8	ground (0 V)
Q_7'	9	serial data output
$\overline{MR}$	10	master reset (active LOW)
SH_{CP}	11	shift register clock input
ST_{CP}	12	storage register clock input
$\overline{OE}$	13	output enable (active LOW)
D_S	14	serial data input
V_{CC}	16	positive supply voltage



Fig.1 Pin configuration.

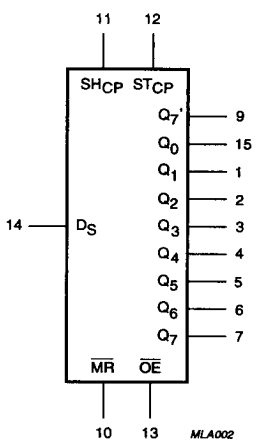

Fig.2 Logic symbol.

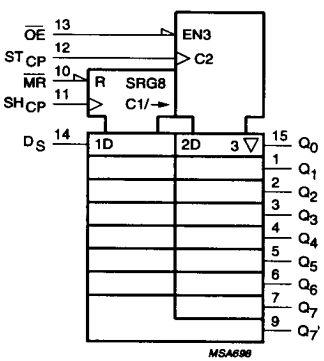

Fig.3 IEC logic symbol.

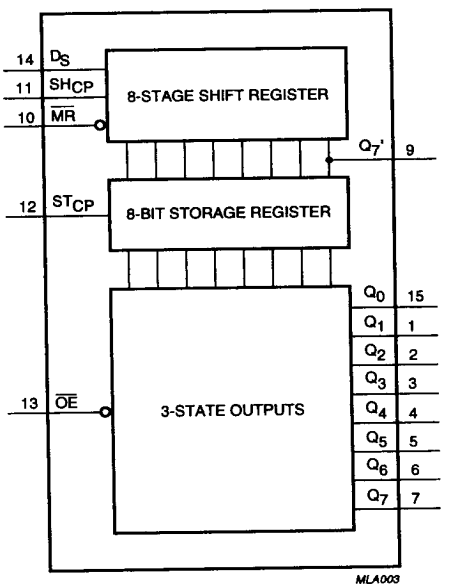

Fig.4 Functional diagram.

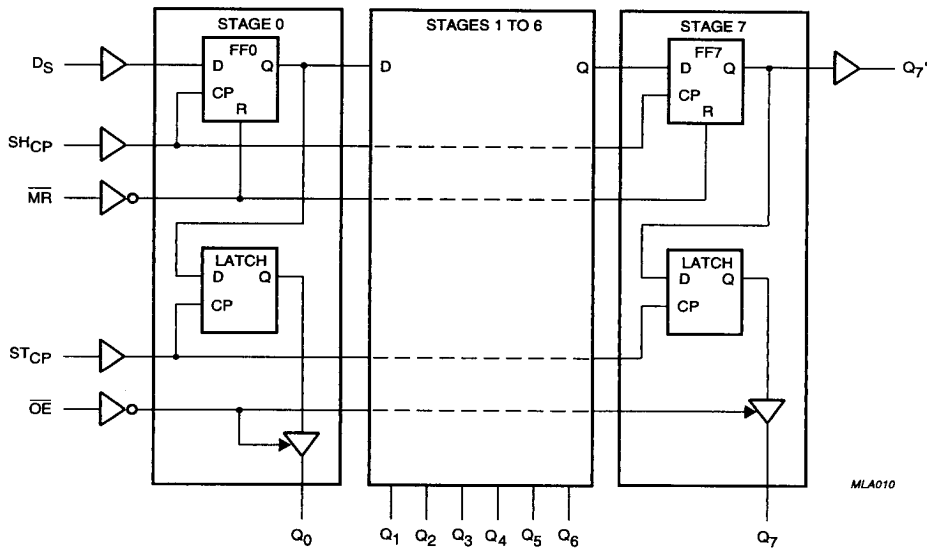

Fig.5 Logic diagram.

FUNCTION TABLE

INPUTS					OUPTUTS		FUNCTION
SH_{CP}	ST_{CP}	$\overline{OE}$	$\overline{MR}$	D_S	Q_7'	Q_n	
X	X	L	↓	X	L	NC	a LOW level on $\overline{MR}$ only affects the shift registers
X	↑	L	L	X	L	L	empty shift register loaded into storage register
X	X	H	L	X	L	Z	shift register clear. Parallel outputs in high-impedance OFF-state
↑	X	L	H	H	Q_6'	NC	logic high level shifted into shift register stage 0. Contents of all shift register stages shifted through, e.g. previous state of stage 6 (internal Q_6') appears on the serial output (Q_7')
X	↑	L	H	X	NC	Q_n'	contents of shift register stages (internal Q_n') are transferred to the storage register andparallel output stages
↑	↑	L	H	X	Q_6'	Q_n'	contents of shift register shifted through. Previous contents of the shift register is transferred to the storage register and the parallel output stages.

H = HIGH voltage level
L = LOW voltage level
↑ = LOW-to-HIGH transition
↓ = HIGH-to-LOW transition
Z = high-impedance OFF-state
NC = no change
X = don't care.

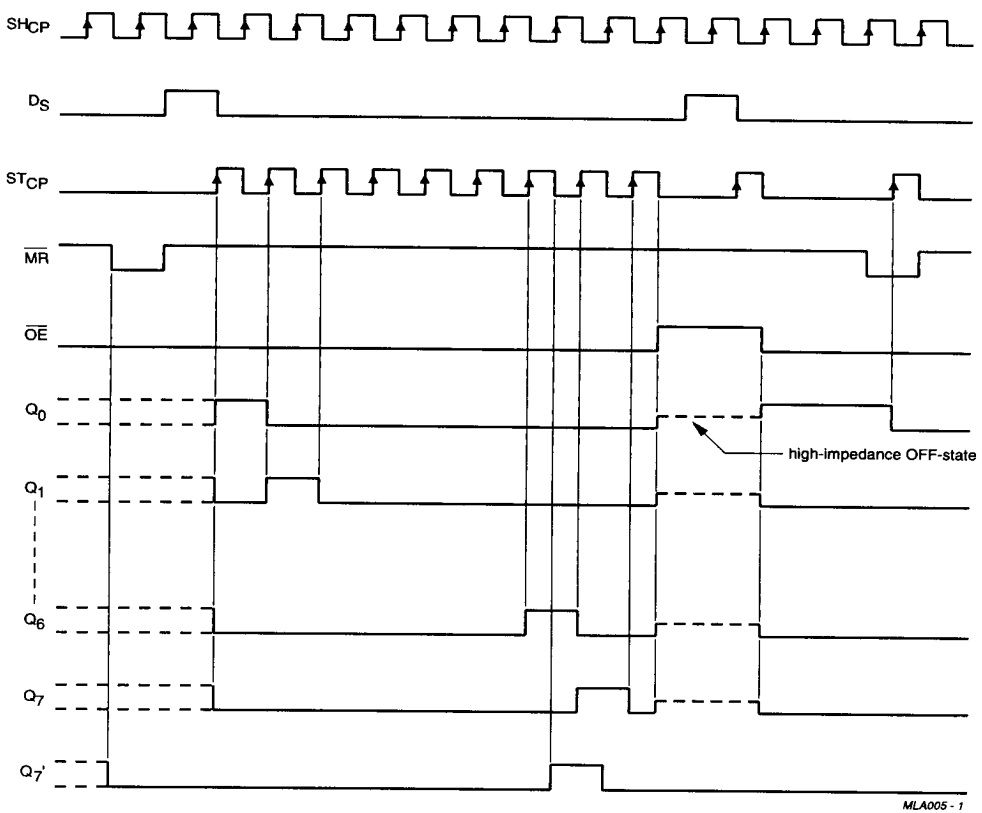

Fig.6 Timing diagram.

DC CHARACTERISTICS FOR 74HC

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: parallel outputs, bus driver; serial output, standard I_{CC} category: MSI.

AC CHARACTERISTICS FOR 74HC

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF.

SYMBOL	PARAMETER	T_{amb} (°C)							UNIT	TEST CONDITION	
		+25			−40 to +85		−40 to +125			V_{CC} (V)	WAVEFORMS
		MIN	TYP	MAX	MIN	MAX	MIN	MAX			
t_{PHL}/t_{PLH}	propagation delay SH_{CP} to Q_7'	– – –	52 19 15	160 32 27	– – –	200 40 34	– – –	240 48 41	ns ns ns	2.0 4.5 6.0	Fig.7
t_{PHL}/t_{PLH}	propagation delay ST_{CP} to Q_n	– – –	55 20 16	175 35 30	– – –	220 44 37	– – –	265 53 45	ns ns ns	2.0 4.5 6.0	Fig.8
t_{PHL}	propagation delay $\overline{MR}$ to Q_7'	– – –	47 17 14	175 35 30	– – –	220 44 37	– – –	265 53 45	ns ns ns	2.0 4.5 6.0	Fig.10
t_{PZH}/t_{PZL}	3-state output enable time $\overline{OE}$ to Q_n	– – –	47 17 14	150 30 26	– – –	190 38 33	– – –	225 45 38	ns ns ns	2.0 4.5 6.0	Fig.11
t_{PHZ}/t_{PLZ}	3-state output disable time $\overline{OE}$ to Q_n	– – –	41 15 12	150 30 26	– – –	190 38 33	– – –	225 45 38	ns ns ns	2.0 4.5 6.0	Fig.11
t_W	shift clock pulse width HIGH or LOW	75 15 13	17 6 5	– – –	95 19 16	– – –	110 22 19	– – –	ns ns ns	2.0 4.5 6.0	Fig.7
t_W	storage clock pulse width HIGH or LOW	75 15 13	11 4 3	– – –	95 19 16	– – –	110 22 19	– – –	ns ns ns	2.0 4.5 6.0	Fig.8
t_W	master reset pulse width LOW	75 15 13	17 6.0 5.0	– – –	95 19 16	– – –	110 22 19	– – –	ns ns ns	2.0 4.5 6.0	Fig.10
t_{su}	set-up time D_S to SH_{CP}	50 10 9.0	11 4.0 3.0	– – –	65 13 11	– – –	75 15 13	– – –	ns ns ns	2.0 4.5 6.0	Fig.9
t_{su}	set-up time SH_{CP} to ST_{CP}	75 15 13	22 8 7	– – –	95 19 16	– – –	110 22 19	– – –	ns ns ns	2.0 4.5 6.0	Fig.8
t_h	hold time D_S to SH_{CP}	3 3 3	−6 −2 −2	– – –	3 3 3	– – –	3 3 3	– – –	ns ns ns	2.0 4.5 6.0	Fig.9
t_{rem}	removal time $\overline{MR}$ to SH_{CP}	50 10 9	−19 −7 −6	– – –	65 13 11	– – –	75 15 13	– – –	ns ns ns	2.0 4.5 6.0	Fig.10

SYMBOL	PARAMETER	T_{amb} (°C)							UNIT	TEST CONDITION	
		+25			−40 to +85		−40 to +125			V_{CC} (V)	WAVEFORMS
		MIN	TYP	MAX	MIN	MAX	MIN	MAX			
f_{max}	maximum clock pulse frequency SH_{CP} or ST_{CP}	6	30	–	4.8	–	4	–	MHz	2.0	Figs 7 and 8
		30	91	–	24	–	20	–	MHz	4.5	
		35	108	–	28	–	24	–	MHz	6.0	

DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: parallel outputs, bus driver; serial output, standard
I_{CC} category: MSI.

Note to HCT types

The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given in the family specifications. To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF

INPUT	UNIT LOAD COEFFICIENT
D_S	0.25
$\overline{MR}$	1.50
SH_{CP}	1.50
ST_{CP}	1.50
$\overline{OE}$	1.50

AC CHARACTERISTICS FOR 74HCT

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF.

SYMBOL	PARAMETER	T_{amb} (°C)							UNIT	TEST CONDITION	
		+25			−40 to +85		−40 to +125			V_{CC} (V)	WAVEFORMS
		MIN	TYP	MAX	MIN	MAX	MIN	MAX			
t_{PHL}/t_{PLH}	propagation delay SH_{CP} to Q_7'	–	25	42	–	53	–	63	ns	4.5	Fig.7
t_{PHL}/t_{PLH}	propagation delay ST_{CP} to Q_n	–	24	40	–	50	–	60	ns	4.5	Fig.8
t_{PHL}	propagation delay $\overline{MR}$ to Q_7'	–	23	40	–	50	–	60	ns	4.5	Fig.10
t_{PZH}/t_{PZL}	3-state output enable time $\overline{OE}$ to Q_n	–	21	35	–	44	–	53	ns	4.5	Fig.11
t_{PHZ}/t_{PLZ}	3-state output disable time $\overline{OE}$ to Q_n	–	18	30	–	38	–	45	ns	4.5	Fig.11
t_W	shift clock pulse width HIGH or LOW	16	6	–	20	–	24	–	ns	4.5	Fig.7
t_W	storage clock pulse width HIGH or LOW	16	5	–	20	–	24	–	ns	4.5	Fig.8
t_W	master reset pulse width LOW	20	8	–	25	–	30	–	ns	4.5	Fig.10
t_{su}	set-up time D_S to SH_{CP}	16	5	–	20	–	24	–	ns	4.5	Fig.9
t_{su}	set-up time SH_{CP} to ST_{CP}	16	8	–	20	–	24	–	ns	4.5	Fig.8
t_h	hold time D_S to SH_{CP}	3	−2	–	3	–	3	–	ns	4.5	Fig.9
t_{rem}	removal time $\overline{MR}$ to SH_{CP}	10	−7	–	13	–	15	–	ns	4.5	Fig.10
f_{max}	maximum clock pulse frequency SH_{CP} or ST_{CP}	30	52	–	24	–	20	–	MHz	4.5	Figs 7 and 8

AC WAVEFORMS

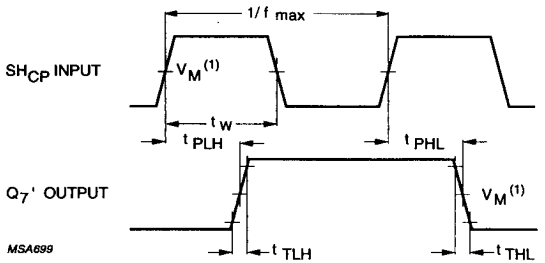

Fig.7 Waveforms showing the clock (SH_{CP}) to output (Q_7') propagation delays, the shift clock pulse width and maximum shift clock frequency.

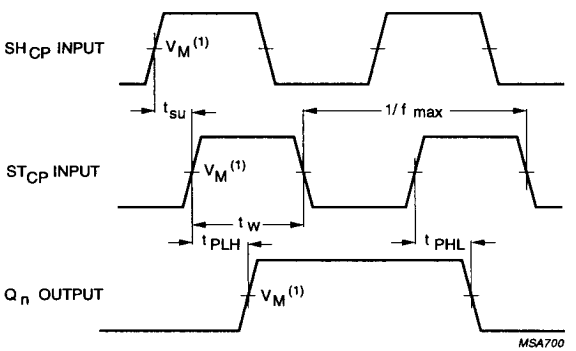

Fig.8 Waveforms showing the storage clock (ST_{CP}) to output (Q_n) propagation delays, the storage clock pulse width and the shift clock to storage clock set-up time.

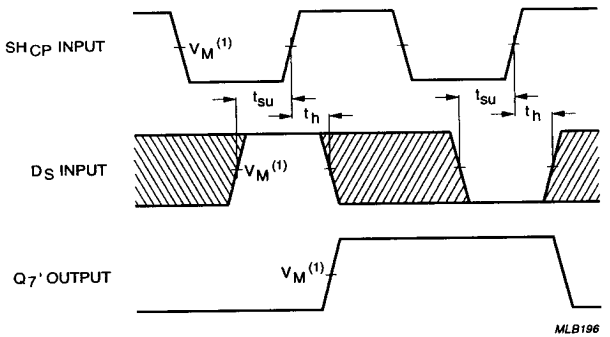

Fig.9 Waveforms showing the data set-up and hold times for the D_S input.

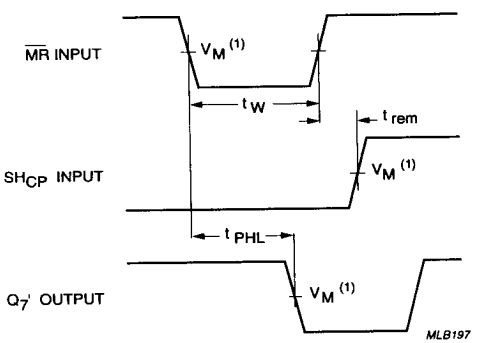

Fig.10 Waveforms showing the master reset ($\overline{MR}$) pulse width, the master reset to output (Q_7') propagation delay and the master reset to shift clock (SH_{CP}) removal time.

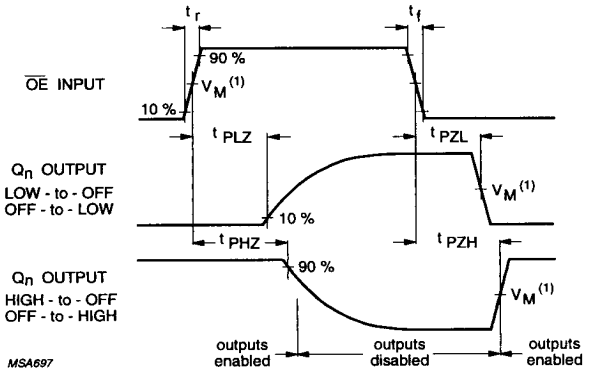

Fig.11 Waveforms showing the 3-state enable and disable times for input $\overline{OE}$.

Note to AC waveforms

(1) HC : V_M = 50%; V_I = GND to V_{CC}
HCT: V_M = 1.3 V; V_I = GND to 3 V.