

PixelMap: A Browser-Based Tool for Wiring-Aware, Anatomy- and Activity-Guided Design of Neuropixels Channelmaps

Maxime Beau^{1,2}, Julie M. J. Fabre¹, Christian Tabedzki¹, Jorge Yanar¹, and Carlos D. Brody^{1,2}

¹ Princeton Neuroscience Institute, Princeton University, USA ² Howard Hughes Medical Institute, USA

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

PixelMap is a browser-based application for creating custom channelmaps for Neuropixels probes that respects electrode wiring constraints. Neuropixels probes, widely used for high-density neural recordings, have more physical electrodes than can be used for simultaneous recording because they contain fewer readout channels and analogue-to-digital converters (ADCs) than electrodes. Each ADC and readout channel is hard-wired to several electrodes, creating complex interdependencies where selecting one electrode makes others unavailable. PixelMap provides an installation-free, browser-based interface for researchers to design arbitrary recording configurations that meet their experimental requirements while satisfying these hardware constraints. Beyond constraint-aware electrode selection, PixelMap supports two guided design workflows: overlaying a SpikeGLX activity survey heatmap to identify the most active channels after implantation, and overlaying anatomical region boundaries from any brain atlas available through BrainGlobe (Claudi et al., 2020) to plan recordings around specific brain regions. The tool generates IMRO (IMec Read Out) files compatible with SpikeGLX, the most common acquisition software for Neuropixels recordings.

Statement of need

Neuropixels probes have revolutionised systems neuroscience by enabling simultaneous recordings from hundreds of neurons across multiple brain regions at any depth (Beau et al., 2021, 2025; Bondy et al., 2024; Jun et al., 2017; Steinmetz et al., 2021; Ye et al., 2025). However, configuring these probes presents challenges. Limited by the number of readout channels and integrated analogue-to-digital converters (ADCs), Neuropixels probes contain 960–5120 physical electrodes per shank but can only record from 384–1536 channels simultaneously (Table 1). Users must therefore select a subset of electrodes to activate for each recording, forming a “channelmap”.

Because readout lines within each shank and ADCs in the probe head are each shared by multiple physical electrodes, activating one electrode makes others unavailable. For Neuropixels 1.0, these dependencies follow a regular, bank-aligned pattern that is relatively intuitive. With single-shank Neuropixels 2.0 probes (Steinmetz et al., 2021), whose wiring is intentionally scrambled to enable recording from several banks simultaneously, and four-shank Neuropixels 2.0 probes, whose wiring become untractable due to the high number of electrode banks, the inter-electrode incompatibilities become difficult to anticipate manually. The difficulty compounds when multiple probes are used simultaneously: experiments can use up to eight simultaneous Neuropixels probes (Bondy et al., 2024), each requiring its own valid channelmap, making a reliable wiring-aware design tool increasingly essential as experimental scale grows.

Beyond satisfying hardware constraints, channelmaps must be tailored to the experiment. Before implantation, researchers plan which brain regions each probe will traverse given its intended insertion trajectory; this requires mapping anatomical boundaries onto the physical electrode layout. After implantation — whether in a chronic preparation where the probe remains in place for weeks, or an acute preparation on the same day as surgery — researchers must adjust their channelmap based on observed neural activity. Sites with high neural activity typically correspond to grey matter with neuron somata, which should be recording with the highest priority. The most effective workflow is therefore iterative: plan anatomically before implantation, survey activity afterwards, and refine the channelmap to maximise unit yield in the target regions. Developing a tool to support this workflow within the Brody laboratory — which reuses experiments featuring eight probes simultaneously (Bondy et al., 2024) — motivated the creation of PixelMap, which is now made available to the wider community. PixelMap addresses these needs by:

- Being available on any machine installation-free:** The tool is available both as a browser-based web application at <https://pixelmap.pni.princeton.edu>, as a Docker image, and a Python package.
- Visualising in real time Neuropixels wiring constraints, interactively:** When users select electrodes, the interface immediately shows which other electrodes become unavailable (marked in black) due to shared ADC lines, preventing invalid configurations.
- Supporting arbitrary electrode geometries:** Users can select electrodes by 1) choosing from common preset geometries, 2) entering electrode ranges as text for reproducibility, 3) directly clicking or dragging on the probe visualization, or 4) loading pre-existing .imro files. These four selection methods are fully intercompatible and can be combined. See the [documentation](#) for details on supported preset geometries and selection methods, in particular the five different dragging boxes that enable great flexibility in electrode selection.
- Guiding channelmap design with activity and anatomy information:** Users can overlay a SpikeGLX activity survey heatmap to identify the most spiking-active channels after probe implantation, and independently overlay anatomical region boundaries from any brain atlas available through BrainGlobe (Claudi et al., 2020) to plan recordings around specific brain regions of interest.

Probe Version	Physical Channels	Simultaneously Recordable Channels
Neuropixels 1.0	960	384
Neuropixels 2.0 (single shank)	1,280	384
Neuropixels 2.0 (4-shank)	5,120 (1,280 per shank)	384
Neuropixels 2.0 Quad Base	5,120 (1,280 per shank)	1,536 (384 max per shank)

Table 1: Number of physical and simultaneously addressable electrodes across Neuropixels probe versions supported by PixelMap.

State of the Field

The primary existing interface for Neuropixels channelmap configuration is the SpikeGLX software, a widely used resource in the field for Neuropixels data acquisition which provides a built-in editor for channelmaps, encoded as .imro files. Its channelmap editor is the field's authoritative reference for wiring constraints as it receives information directly from the Neuropixels probe manufacturer (IMEC). For this reason, PixelMap relies on SpikeGLX to derive each probe's version-specific wiring constraints, and also encodes channelmaps as

.imro files designed to be used with SpikeGLX. However, SpikeGLX is a desktop application that requires having a connected Neuropixels probe to design channelmaps, which restricts channelmap design from locations remote from the recording rig. SpikeGLX's editor features a small set of electrode selection presets but does not support arbitrary electrode geometry selection, relying instead on selection of contiguous electrode groups, and offers no anatomical overlay guidance. It also does not feature tools to select interleaved electrodes to increase the span of neural tissue covered by the channelmap, not tools to deselect electrodes that are blocking a target region of unavailable electrodes, which is a common workflow when users want to record from a specific brain region but find that the required electrodes are unavailable due to wiring constraints. Open Ephys, an alternative open-source acquisition platform widely used in the community, suffers from the same drawbacks as SpikeGLX: the application requires a desktop installation on each machine used, and to be connected to hardware to work. Its channelmap editor is easier to use than that of SpikeGLX, but does not provide anatomical overlay, nor does it support tools for interleaved selection or to deselect electrodes that are blocking a target region of unavailable electrodes. As a result, researchers who require custom channelmaps - particularly those targeting specific brain regions or working with the complex wiring of Neuropixels 2.0 probes—routinely - resort to hand-editing .imro files through custom Python or MATLAB scripts. This requires detailed knowledge of the .imro format and the probe-specific electrode-to-ADC correspondence tables, offer no visual feedback about constraint violations, and provide no safeguard against generating an invalid configuration. To our knowledge, no existing tool offers installation-free channelmap design, real-time wiring constraint visualisation, arbitrary electrode geometry selection, and integrated anatomical and activity-based overlay guidance in a single interface.

Software Design

PixelMap is implemented in Python using [Holoviz Panel](#) for the web interface, providing an interactive and responsive user experience. The software architecture consists of four main components.

First, the **probe type database and wiring maps** (distributed in `./constants.py`, `./utils/probe_features.py`, `./wiring_maps/*`) derives the mapping between probe part numbers, SpikeGLX probe type identifiers, and IMRO format numbers directly from the authoritative source maintained by SpikeGLX developer Bill Karsh. This provides both accuracy and forward compatibility with new probe versions as they are added to SpikeGLX. The **wiring maps** at `./wiring_maps/*.csv` are CSV files describing the electrode-to-ADC mappings for each supported probe type. They were adapted from files provided by IMEC (Neuropixels manufacturer - downloadable [here](#)) and SpikeGLX (<https://github.com/billkarsh/SpikeGLX/tree/a9024ba79f4481883766f5468563accb74fd58fd/Source-imro>). PixelMap currently supports Neuropixels 1.0, 2.0 single-shank, 2.0 four-shank, and 2.0 Quad Base probes.

Second, the **core logic** at `./backend.py` implements the constraint-checking algorithms that validate electrode selections against probe-specific wiring maps. Hash tables (Python dictionaries) are used to query incompatible electrode pairs fast, with $O(1)$ complexity.

Finally, the **graphical user interface** at `./gui/gui.py` was built with Holoviz Panel. The interface provides real-time visualisation of the probe layout with electrodes colour-coded by selection state (available in grey, selected in red, or unavailable in black). The interface supports the four selection modes described above, including interactive single-click and drag-box selection and deselection. Five distinct box tools cover the most common needs: a standard selection box, a deselection box, a zigzag (checkerboard) selector for broader interleaved coverage, an interleaved-pairs selector that selects alternating row pairs, and a “deselect dependents” box that identifies and releases the selected electrodes that are blocking a target region of unavailable electrodes. User interactions trigger immediate recalculation of available electrodes, ensuring users receive instant visual feedback about constraint violations.

132 Notably, the GUI supports two powerful overlay modes displayed alongside the probe
 133 visualization. The **activity survey overlay** reads a per-contact activity file exported from
 134 SpikeGLX and renders a coloured bar beside each electrode, allowing users to identify channels
 135 with high spiking activity (typically grey matter) and adjust their channelmap accordingly. The
 136 **anatomical overlay** computes the brain region traversed by each electrode along a user-specified
 137 insertion trajectory—accounting for pitch, yaw, and multi-shank orientation—using any atlas
 138 registered in the BrainGlobe atlas API (Claudi et al., 2020). It renders colour-coded depth
 139 bands on the probe and displays three orthogonal atlas slices (sagittal, coronal, horizontal)
 140 through the probe tip. Both overlays are preserved when downloading the PDF rendering of
 141 the channelmap, providing a complete experimental record.

142 Forward Compatibility and Extensibility

143 PixelMap’s architecture is designed to accommodate new hardware and atlas resources with
 144 minimal effort, lowering the barrier for both maintainers and contributors.

145 **Probe support.** Wiring constraints are encoded as standalone CSV files (`wiring_maps/*.csv`),
 146 one per probe type, and probe metadata (part numbers, readout counts, electrode pitches) is
 147 derived directly from the authoritative JSON maintained by SpikeGLX developer Bill Karsh.
 148 Adding support for a new Neuropixels probe released by IMEC requires only a new wiring CSV
 149 and an updated entry in the Bill Karsh JSON—no changes to the constraint-checking backend
 150 are needed, since it operates generically over hash-map lookups.

151 **Atlas support.** The anatomical overlay is built on the BrainGlobe Atlas API (Claudi et al.,
 152 2020), which provides a growing catalogue of brain atlases across species. Any atlas registered
 153 with BrainGlobe is automatically available to PixelMap users without code changes. In the
 154 Docker deployment, the two most widely used atlases—Allen Mouse Brain Common Coordinate
 155 Framework at 25 μm (`allen_mouse_25um`) and Waxholm Space Atlas of the Sprague Dawley
 156 Rat at 39 μm (`whs_sd_rat_39um`)—are pre-downloaded into the container image so they are
 157 available instantly. Additional atlases are downloaded on demand: when a user selects an atlas
 158 that has not yet been cached, the button label changes to “Download & compute atlas” to
 159 indicate a one-time download is in progress. Downloaded atlases are stored in a shared Docker
 160 volume (`brainglobe_cache`) that persists across container restarts, so each atlas only needs
 161 to be fetched once and is then available to all subsequent users of the server.

162 **Contributor extensibility.** The codebase is written as comprehensively as possible with
 163 contributions in mind. New selection presets can be added to `backend.py`, new overlay
 164 types can follow the pattern established by the activity-survey and anatomy overlays, and
 165 the GUI layer can be extended or replaced without modifying the core constraint logic. This
 166 modular design, together with comprehensive tests and a contributor guide (`CONTRIBUTING.md`),
 167 is intended to make it straightforward for the community to contribute features that serve
 168 their specific experimental workflows. These design choices have already enabled two new
 169 contributors to contribute significant features in 2026, warranting authorship on this paper:
 170 the anatomical overlay (J.M.J.F) and the activity survey overlay (J.Y.).

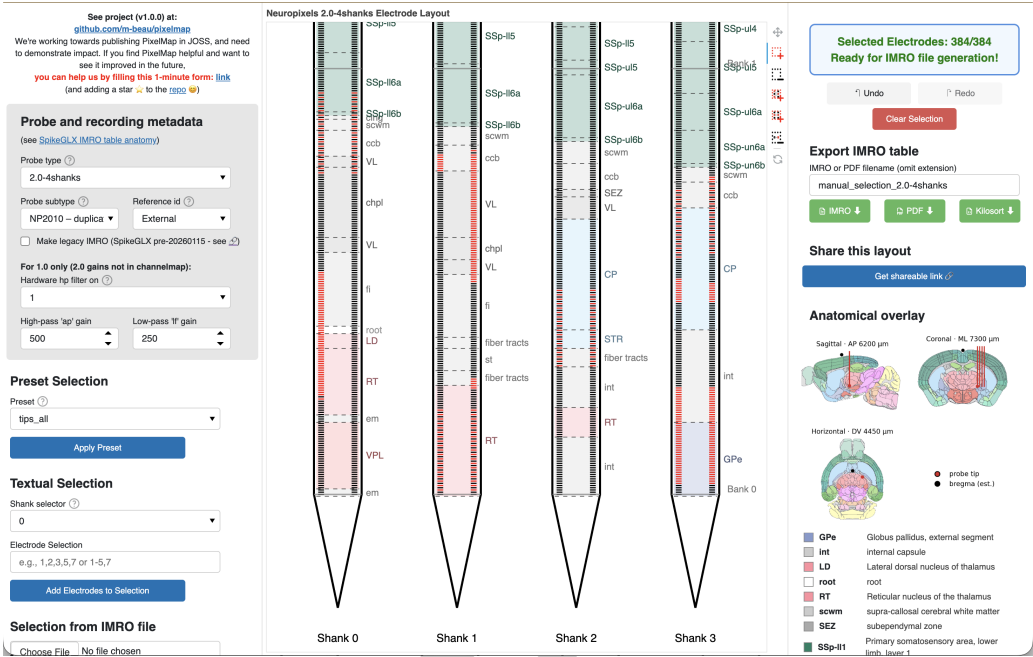


Figure 1: PixelMap’s browser-based graphical user interface. **Center:** Main panel featuring the probe’s physical layout with one or four shanks that exhibit the 960 (Neuropixels 1.0) or 1,280 (Neuropixels 2.0) physical electrodes per shank to be selected from. Electrodes available for selection are light grey, selected electrodes turn red, and electrodes that become unavailable due to hardware wiring constraints turn black. In this example, 384 electrodes have been selected (matching the maximum simultaneous recording capacity), with a distributed pattern across multiple banks, illustrating that PixelMap allows selection of arbitrary channelmap geometries. An anatomical overlay (colored depth bands with region labels) and is shown as an optional layers that guides channelmap design. **Left:** panel to input probe metadata (also part of .imro files) as well as three methods of electrode selection: preset geometries, manual textual input of electrode ranges, and pre-loading an existing .imro file. These three methods of electrode selection can be mixed together with five interactive click-and-drag box tools. **Right:** electrode status indicator that turns green to confirm the selection is complete and is ready for IMRO file generation. Users can export their configuration via the “Download IMRO” button for direct use in SpikeGLX and optionally save a PDF visualisation to easily remember the geometry of the corresponding .imro file in the future. Below the status indicator are PixelMap’s instructions.

Installation and Usage

PixelMap can be used through:

1. **Web application:** Available at <https://pixelmap.pni.princeton.edu> for immediate use without installation.
2. **Local installation:** Via pip (pip install .) or uv (uv run pixelmap) from the cloned GitHub repository.
3. **Docker container:** Users can download the image used for the website and run the container locally.
4. **Programmatic API:** Python scripts can directly call generate_imro_channelmap() for batch processing or integration into analysis pipelines.

For more details, see the project repository at <https://github.com/m-beau/pixelmap>.

The software includes an automated test suite covering hardware constraint validation, all preset configurations, IMRO file generation for all supported probe types, and end-to-end

workflows. Tests run automatically via GitHub Actions continuous integration on every code change, ensuring software reliability. See the repository's tests/ directory for details.

Research Impact Statement

PixelMap addresses a practical bottleneck in Neuropixels experimental workflows. Neuropixels have become the dominant technology for large-scale electrophysiology, with exponential growth in publications using the technology (PubMed). Yet no existing tool provided installation-free channelmap design with support for arbitrary electrode geometries and anatomy-guided planning (see Statement of Need).

PixelMap demonstrates community-readiness through comprehensive documentation—including a dedicated contributor guide (CONTRIBUTING.md) with contribution workflows and a permissive open-source license (GPL3). The tool is immediately accessible via web application, Python package, Docker container, or programmatic API. The tool builds on the authors' established track record using Neuropixels probes in their research (Beau et al., 2025; Bondy et al., 2024; Steinmetz et al., 2021) and developing Neuropixels software (Beau et al., 2021).

Evidence of adoption includes deployment at Princeton Neuroscience Institute's public server, community engagement on the project repository (37 GitHub stars), and measured web traffic: cookie analytics recorded approximately 400 unique visitors between March and May 2026, averaging roughly 45 unique visitors per week (see https://github.com/m-beau/pixelmap/tree/main/analytics). The package has been under active development for over ten months, with external contributors implementing new features (anatomical overlay, activity survey overlay).

AI Usage Disclosure

AI-assisted technologies used: Claude Sonnet 4.5, Sonnet 4.6, and Opus 4.6 (Anthropic). AI assistance was used for (1) optimization suggestions and documentation improvements (docstrings, code comments) in backend.py, (2) initial scaffolding of the Holoviz Panel GUI architecture in gui/gui.py, (3) manuscript grammatical and syntactical review. AI was not used for project conceptualization, core backend design, electrode wiring map construction. App hosting infrastructure was designed independently of AI assistance. All AI-generated code suggestions were reviewed and validated by human authors before integration; all AI-assisted manuscript edits were reviewed and approved by the corresponding author.

Author Contributions

	Maxime Beau	Julie Fabre	Christian Tabedzki	Jorge Yanar	Carlos D. Brody
Conceptualisation	X				
Backend	X				
GUI - general	X	X			
GUI - Anatomical overlay		X			
GUI - Activity survey overlay				X	
App hosting			X		
Supervision and funding					X

Conflict of Interest Statement

The authors declare no competing interests.

Acknowledgements

We thank Jesse C. Kaminsky and members of the Brody laboratory for testing and feedback during development, and PNI IT members Garrett McGrath and Gary Lyons for their advice concerning hosting. We also thank Bill Karsh for help with development and navigation of SpikeGLX resources. Finally, we thank the Princeton Neuroscience Institute for hosting the web application. J.M.J.F. was supported by the Schmidt Science Fellows, in partnership with the Rhodes Trust. This work was supported by Howard Hughes Medical Institute and the National Institutes of Health.

References

- Beau, M., D'Agostino, F., Lajko, A., Martínez, G., Häusser, M., & Kostadinov, D. (2021). *NeuroPyxels: Loading, processing and plotting Neuropixels data in Python*. Zenodo. <https://doi.org/10.5281/zenodo.5509733>
- Beau, M., Herzfeld, D. J., Naveros, F., Hemelt, M. E., D'Agostino, F., Oostland, M., Sánchez-López, A., Chung, Y. Y., Maibach, M., Kyranakis, S., Stabb, H. N., Martínez Lopera, M. G., Lajko, A., Zedler, M., Ohmae, S., Hall, N. J., Clark, B. A., Cohen, D., Lisberger, S. G., & others. (2025). A deep learning strategy to identify cell types across species from high-density extracellular recordings. *Cell*, 188(8), 2218–2234.e22. <https://doi.org/10.1016/j.cell.2025.01.041>
- Bondy, A. G., Charlton, J. A., Luo, T. Z., Kopec, C. D., Stagnaro, W. M., Venditto, S. J. C., Lynch, L., Janarthanan, S., Oline, S. N., Harris, T. D., & Brody, C. D. (2024). Coordinated cross-brain activity during accumulation of sensory evidence and decision commitment. *bioRxiv*. <https://doi.org/10.1101/2024.08.21.609044>
- Claudi, F., Petrucco, L., Tyson, A. L., Branco, T., Margrie, T. W., & Portugues, R. (2020). BrainGlobe Atlas API: a common interface for neuroanatomical atlases. *Journal of Open Source Software*, 5(54), 2668. <https://doi.org/10.21105/joss.02668>
- Jun, J. J., Steinmetz, N. A., Siegle, J. H., Denman, D. J., Bauza, M., Barbarits, B., Lee, A. K., Anastassiou, C. A., Andrei, A., Aydın, Ç., Barbic, M., Blanche, T. J., Bonin, V., Couto, J., Dutta, B., Gratiy, S. L., Gutnisky, D. A., Häusser, M., Karsh, B., & others. (2017). Fully integrated silicon probes for high-density recording of neural activity. *Nature*, 551(7679), 232–236. <https://doi.org/10.1038/nature24636>
- Steinmetz, N. A., Aydın, C., Lebedeva, A., Okun, M., Pachitariu, M., Bauza, M., Beau, M., Bhagat, J., Böhm, C., Broux, M., Chen, S., Colonell, J., Gardner, R. J., Karsh, B., Kloosterman, F., Kostadinov, D., Mora-Lopez, C., O'Callaghan, J., Park, J., & others. (2021). Neuropixels 2.0: A miniaturized high-density probe for stable, long-term brain recordings. *Science*, 372(6539), eabf4588. <https://doi.org/10.1126/science.abf4588>
- Ye, Z., Shelton, A. M., Shaker, J. R., Boussard, J., Colonell, J., Birman, D., Manavi, S., Chen, S., Windolf, C., Hurwitz, C., Yu, H., Namima, T., Pedraja, F., Weiss, S., Raducanu, B. C., Ness, T. V., Jia, X., Mastroberardino, G., Rossi, L. F., & others. (2025). Ultra-high-density Neuropixels probes improve detection and identification in neuronal recordings. *Neuron*. <https://doi.org/10.1016/j.neuron.2025.08.030>