* This is the most volatile component with moving parts! Estimates have already been used in testing to repair Velocimotors or fasteners such as rubber bands.

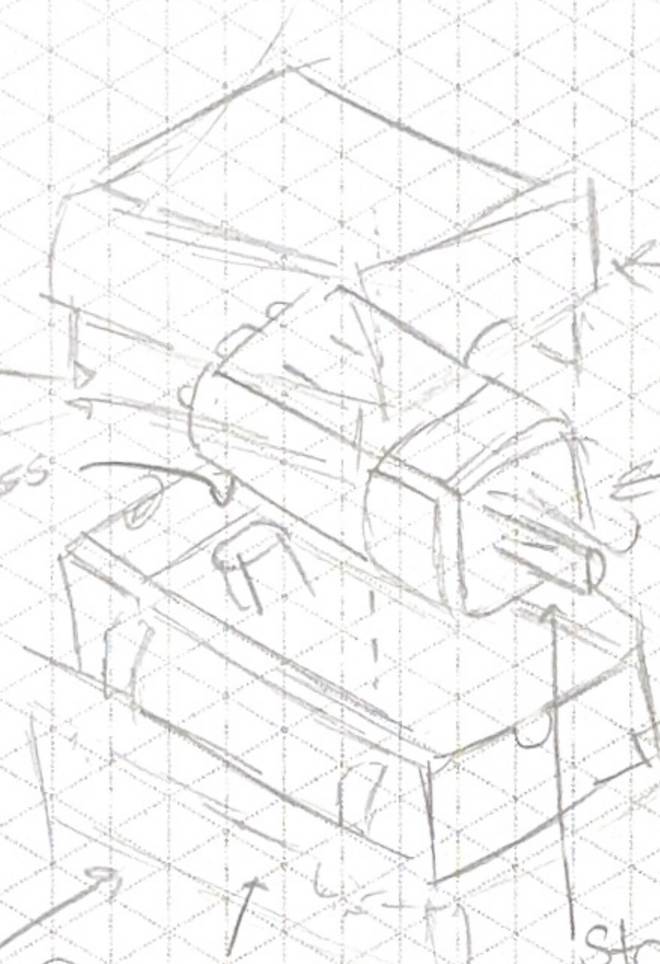

M.O.U.O. Labyrinth Interlock

Stress
the labyrinth must resist the upward motion of the motor

Stress
the N20 motor clip must hold the motor in place

Chassis Interlock
Stress/Fatigue
on the interlock between motor and chassis as it must resist the upward momentum of the active motor and keep it in place.

Stress/Fatigue (heavy) on the axle and especially the fastener/slot of the wheel as it directly experiences the motor torque.

NAME	TITLE	DATE	PERIOD
Matthew Jelde	Velocimotor Subsystem	4/14/26	1