

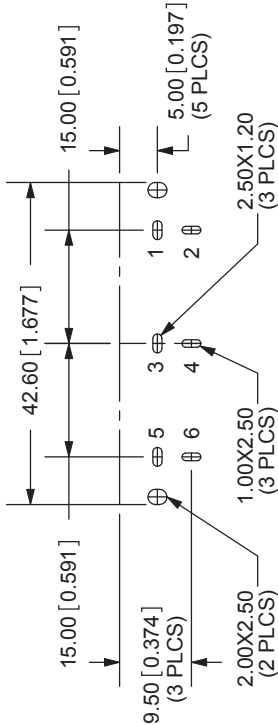
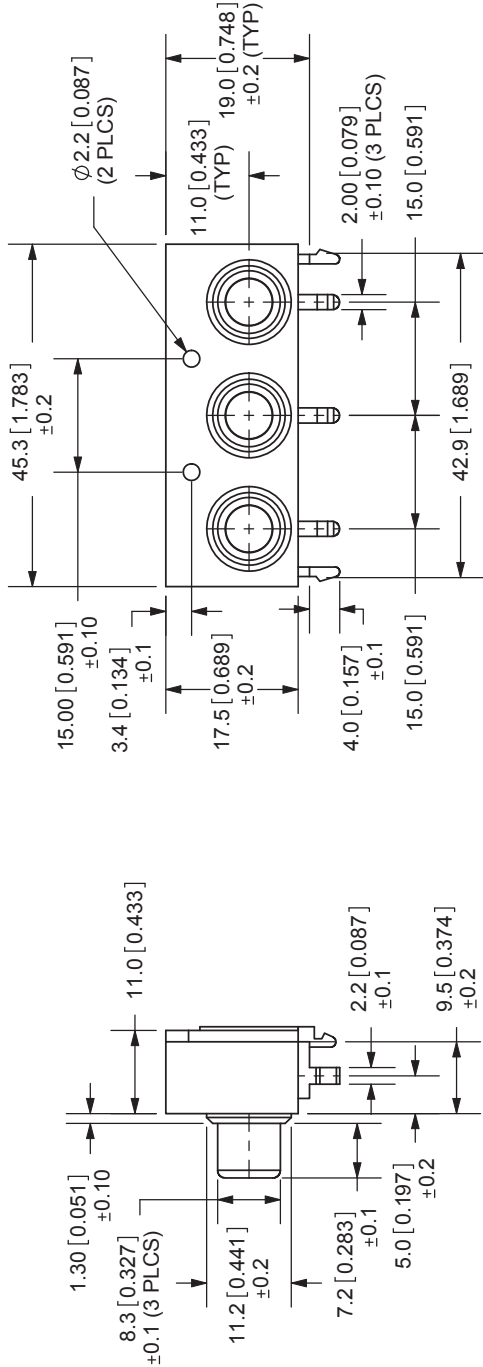


REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/19/2007

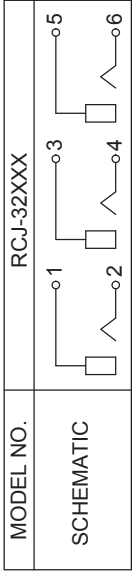

SPECIFICATIONS:  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 50M OHMS MIN: 100V DC  
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
 LIFE: 5,000 CYCLES  
 OPERATING TEMP: -20° ~ +85°C


COLOR CHART
1 Black
2 Red
3 White
4 Yellow
5 Blue
6 Green
7 Orange



COLOR INDEX			
PART NO.	INPUT X1	INPUT X2	INPUT X3
RCJ-32234	Red Color	White Color	Yellow Color
RCJ-32X1 X2 X3	Color X1	Color X2	Color X3

PLATING	
TERMINAL	MATERIAL
PIN	Brass
BASE	Brass
INPUT X1	PA66
INPUT X2	PA66
INPUT X3	PA66



TOLERANCE:  
 ±0.3mm UNLESS  
 OTHERWISE SPECIFIED

20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

TITLE: RCA Jack, 3-Port, Rt Angle, PCB Mount, Horiz.

REV: A

PART NO: RCJ-32XXX

UNITS: MM [INCHES]

DRAWN BY: ZRJ

APPROVED BY:

SCALE: 1:1