

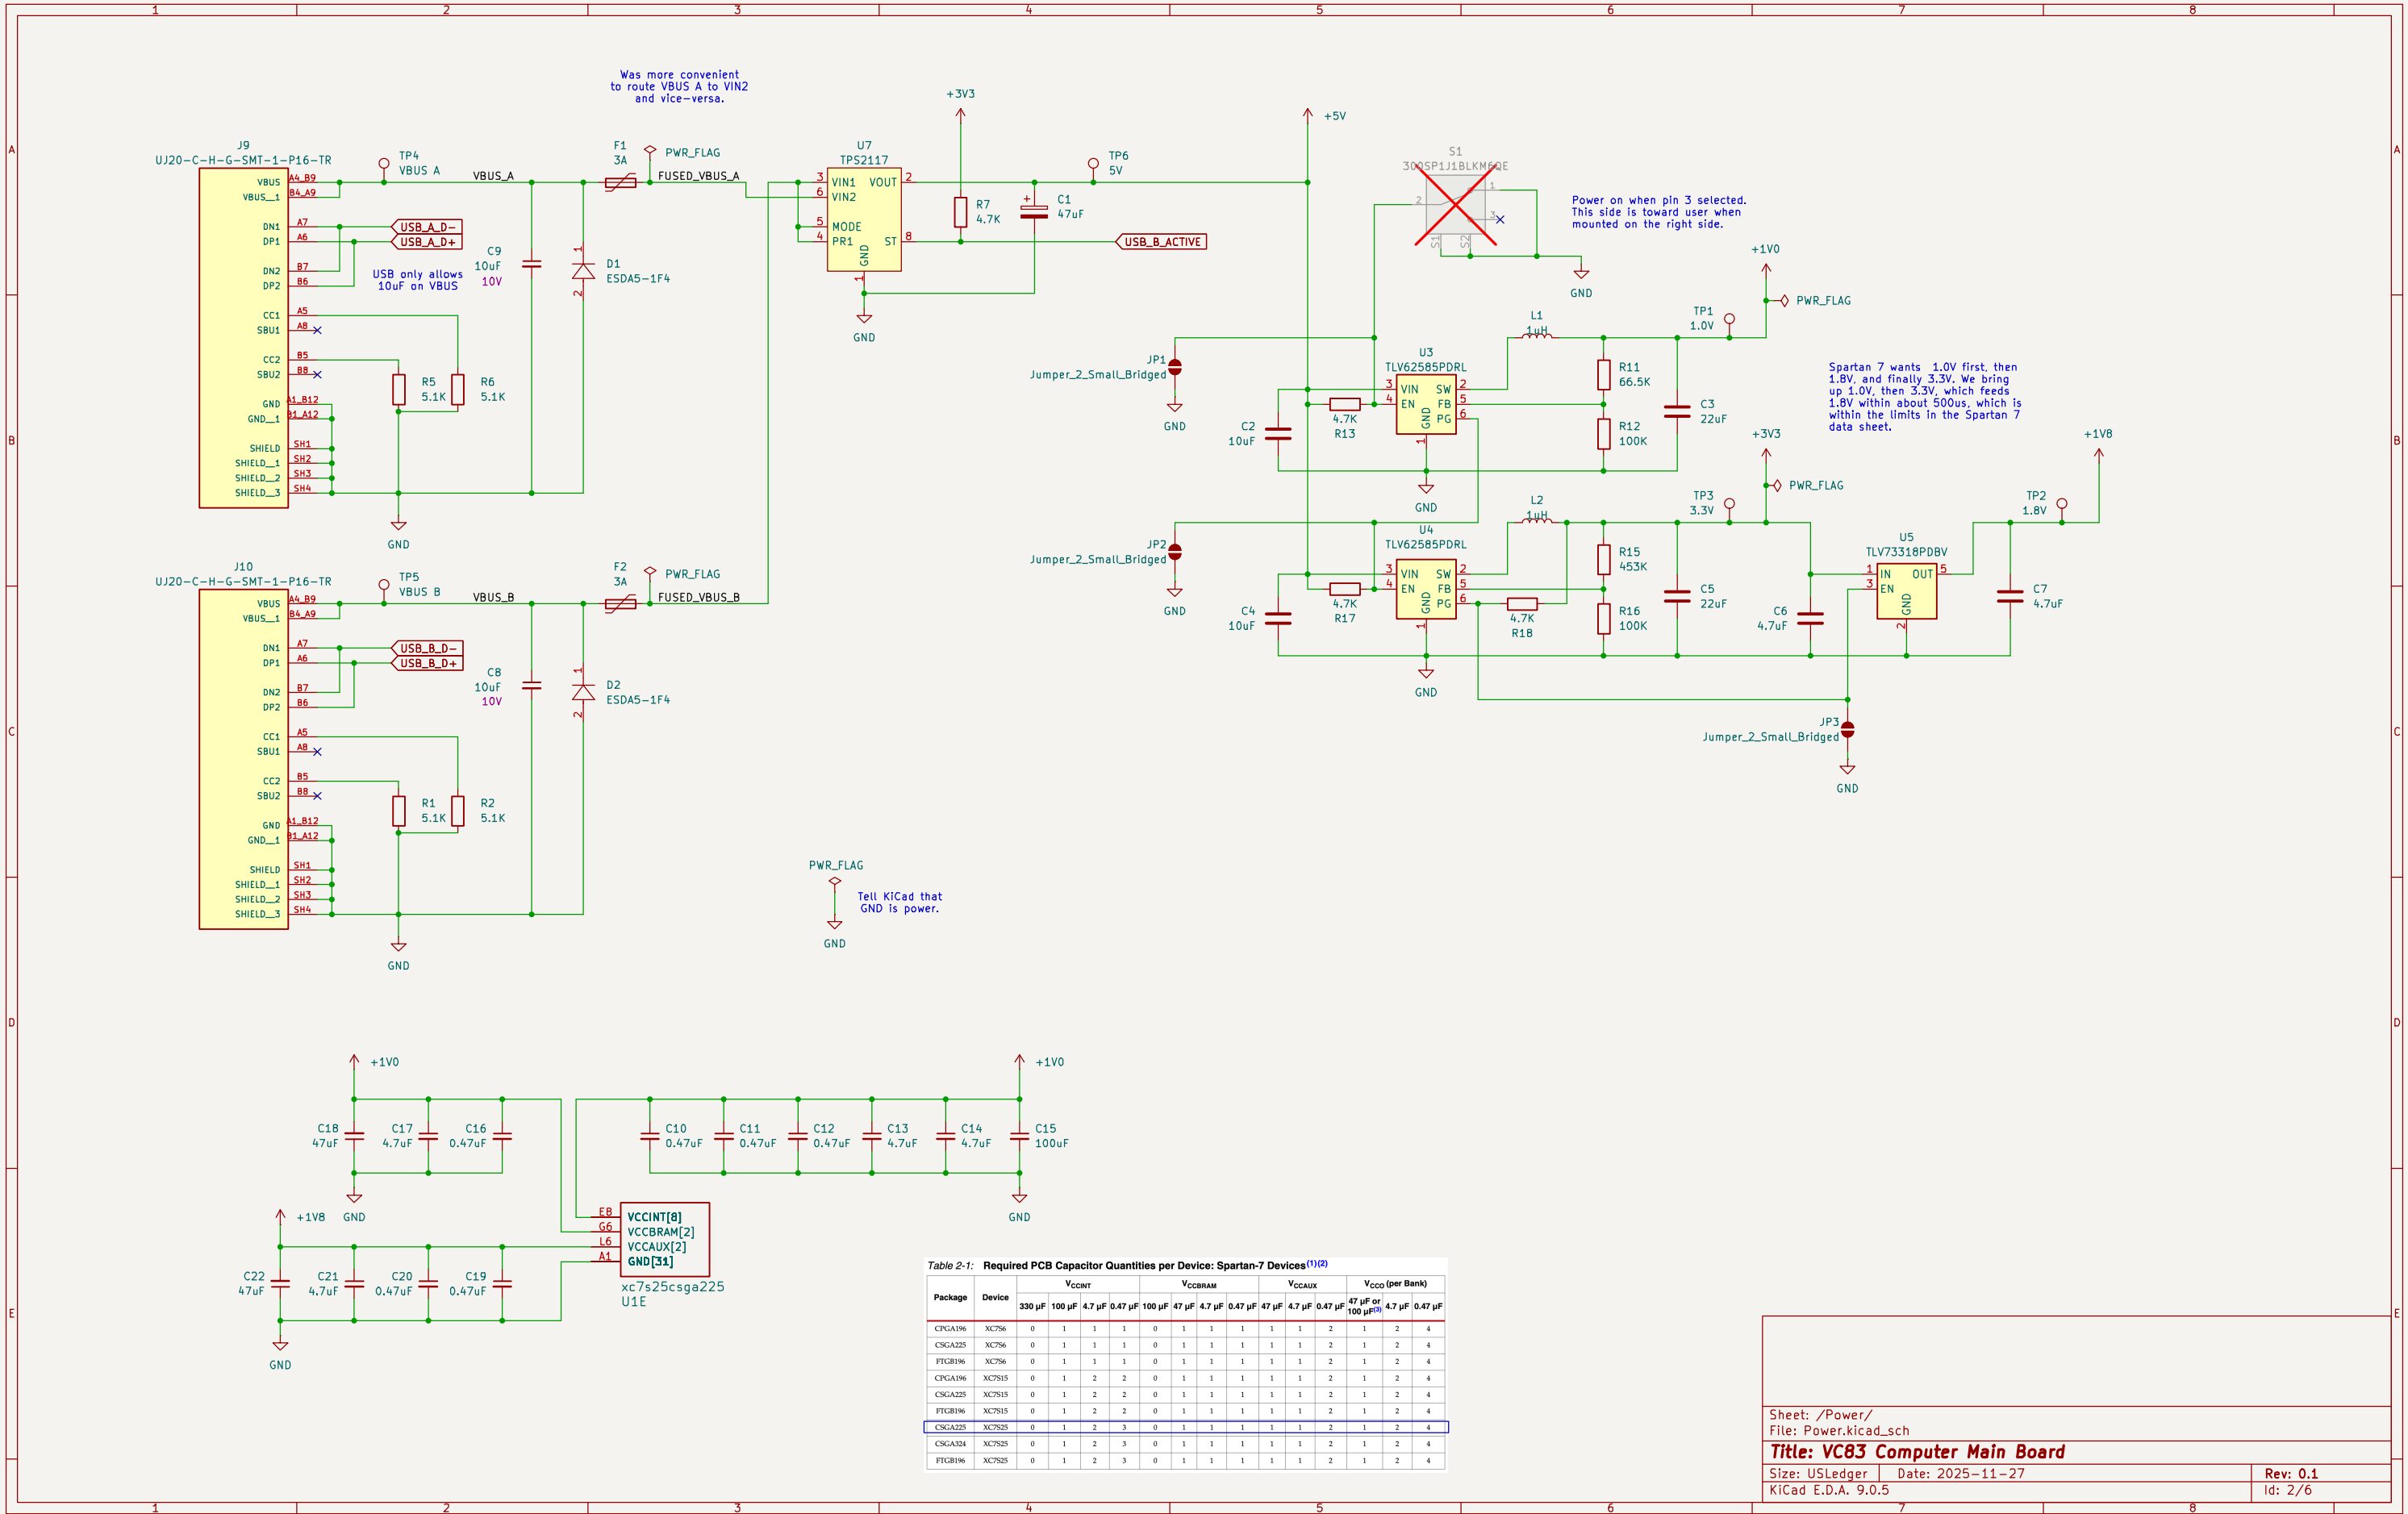


Table 2-1: Required PCB Capacitor Quantities per Device: Spartan-7 Devices⁽¹⁾⁽²⁾

Package	Device	VCCINT				VCCBRAM				VCCAUX				VCCO (per Bank)			
		330 µF	100 µF	4.7 µF	0.47 µF	100 µF	47 µF	4.7 µF	0.47 µF	4.7 µF	0.47 µF	4.7 µF	0.47 µF	47 µF or 100 µF ⁽³⁾	4.7 µF	0.47 µF	0.47 µF
CPGA196	XC7S6	0	1	1	1	0	1	1	1	1	1	2	1	2	4		
CSGA225	XC7S6	0	1	1	1	0	1	1	1	1	1	2	1	2	4		
FTGB196	XC7S6	0	1	1	1	0	1	1	1	1	1	2	1	2	4		
CPGA196	XC7S15	0	1	2	2	0	1	1	1	1	1	2	1	2	4		
CSGA225	XC7S15	0	1	2	2	0	1	1	1	1	1	2	1	2	4		
FTGB196	XC7S15	0	1	2	2	0	1	1	1	1	1	2	1	2	4		
CSGA225	XC7S25	0	1	2	3	0	1	1	1	1	1	2	1	2	4		
CSGA324	XC7S25	0	1	2	3	0	1	1	1	1	1	2	1	2	4		
FTGB196	XC7S25	0	1	2	3	0	1	1	1	1	1	2	1	2	4		



