

Beagle

Design and Architecture

Annika Berger, Joshua Gleitze, Roman Langrehr,
Christoph Michelbach, Ansgar Spiegler, Michael Vogt

10th of January 2016

at the Department of Informatics
Institute for Program Structures and Data Organization (IPD)

Reviewer:	Jun.-Prof. Dr.-Ing. Anne Koziolek
Advisor:	M.Sc. Axel Busch
Second advisor:	M.Sc. Michael Langhammer

Karlsruher Institut für Technologie
Fakultät für Informatik
Postfach 6980
76128 Karlsruhe

Contents

List of Figures	ii
Abbreviations	iii
1 Architectural Overview	1
1.1 Extension Points	2
2 Beagle’s Knowledge: The Blackboard	7
2.1 Measurable SEFF Elements	7
2.2 Evaluable Expressions	7
3 The Analysis	11
3.1 Measurement	11
3.2 Final Judge	11
4 Graphical User Interface	13
4.1 Overview	13
4.2 Most Important Classes	13
4.2.1 GUI Controller	13
4.2.2 Beagle Controller	13
4.3 Control Flow	13
4.4 Reasons for Chosen Design	15
4.5 Chosen Design Patterns	15
5 Requirements Specification	17
5.1 Changes to the Software Requirements Specification	17
5.2 Relating Requirements to the Design	18
Terms and Definitions	19
Bibliography	21

List of Figures

1.1	Beagle Core Component	2
1.2	Beagle Core Overview Class Diagram	3
1.3	Beagle Core Package Diagram	4
2.1	Abstraction Layers on the Blackboard	8
2.2	The Blackboard and its views	9
2.3	Evaluable Expressions	10
3.1	Beagle Controller#perform Analysis() pseudocode	12
4.1	GUI Classes	14

Abbreviations

API Application Programming Interface

CTA Common Trace API

GUI Graphical User Interface

PCM Palladio Component Model

SEFF service effect specification

SRS Software Requirements Specification

1 Architectural Overview

This chapter gives an introduction to Beagle's high level design. The following chapters will describe conceptual details of different subsystems. For the specification of single types, please refer to Beagle's Javadoc documentation [Berger et al., 2016].

Beagle consists of a core component and interfaces to external components. Components may depend on information provided by another component, but their internal logic works strictly independently. Communication takes exclusively place through the core component. The following are the key components and interfaces:

Core Component (Mediator Pattern)

In order to manage and synchronise the requests and execution of different jobs, Beagle is controlled by a core component. The core component conducts the order of executable services, distributes information and is responsible for class instantiation. It contains all management logic required to perform dynamic analysis on software and will offer a parametrised PCM at the end of a successful execution. It does, however, not contain any logic to actually run measurements or analyse parametric dependencies. Instead, it depends on proper other components providing this functionality.

Measurement Tool

Measurement Tools are responsible for all kinds of measurements that are needed to get the execution time of Resource Demanding Internal Actions, branch decisions of service effect specification (SEFF) Branches and repetitions of SEFF Loops in regard to a certain parametrisation. An adapter instructing Kieker will be the first class to implement this interface.

Measurement Result Analyser

Based on the measurement results, a Measurement Result Analyser will suggest evaluable expressions that describe the parametrisation of Resource Demanding Internal Actions, SEFF Branches or SEFF Loops. Typical implementations are regression tools.



Figure 1.1: The Beagle Core Component and its interfaces.

Proposed Expression Analyser

Proposed Expression Analysers try to improve the results of Measurement Result Analysers. They usually try to combine proposed expressions to build a better one (in terms of Beagle’s Fitness Function). As different regression approaches usually have different advantages and shortcomings, combining their results may produce a more accurate expression because it contains “more parts of the truth” [Krogmann, 2011]. The genetic approach described by Krogmann

Final Judge

This class is responsible to decide which proposed evaluable expression describes the measured results best and will be annotated in the Palladio Component Model (PCM). It also decides if more measurements should be done and when the final solution is found.

GUI (Model-View-Controller)

The GUI is not a necessary component that provides functionality for parametrisation. But it is necessary for providing interaction between Beagle and the user as the user may want to set up some features of Beagle.

1.1 Extension Points

Measurement Tools, Measurement Expression Analysers and Proposed Expression Analysers are connected to Beagle via Eclipse Extension Points. This allows a flexible

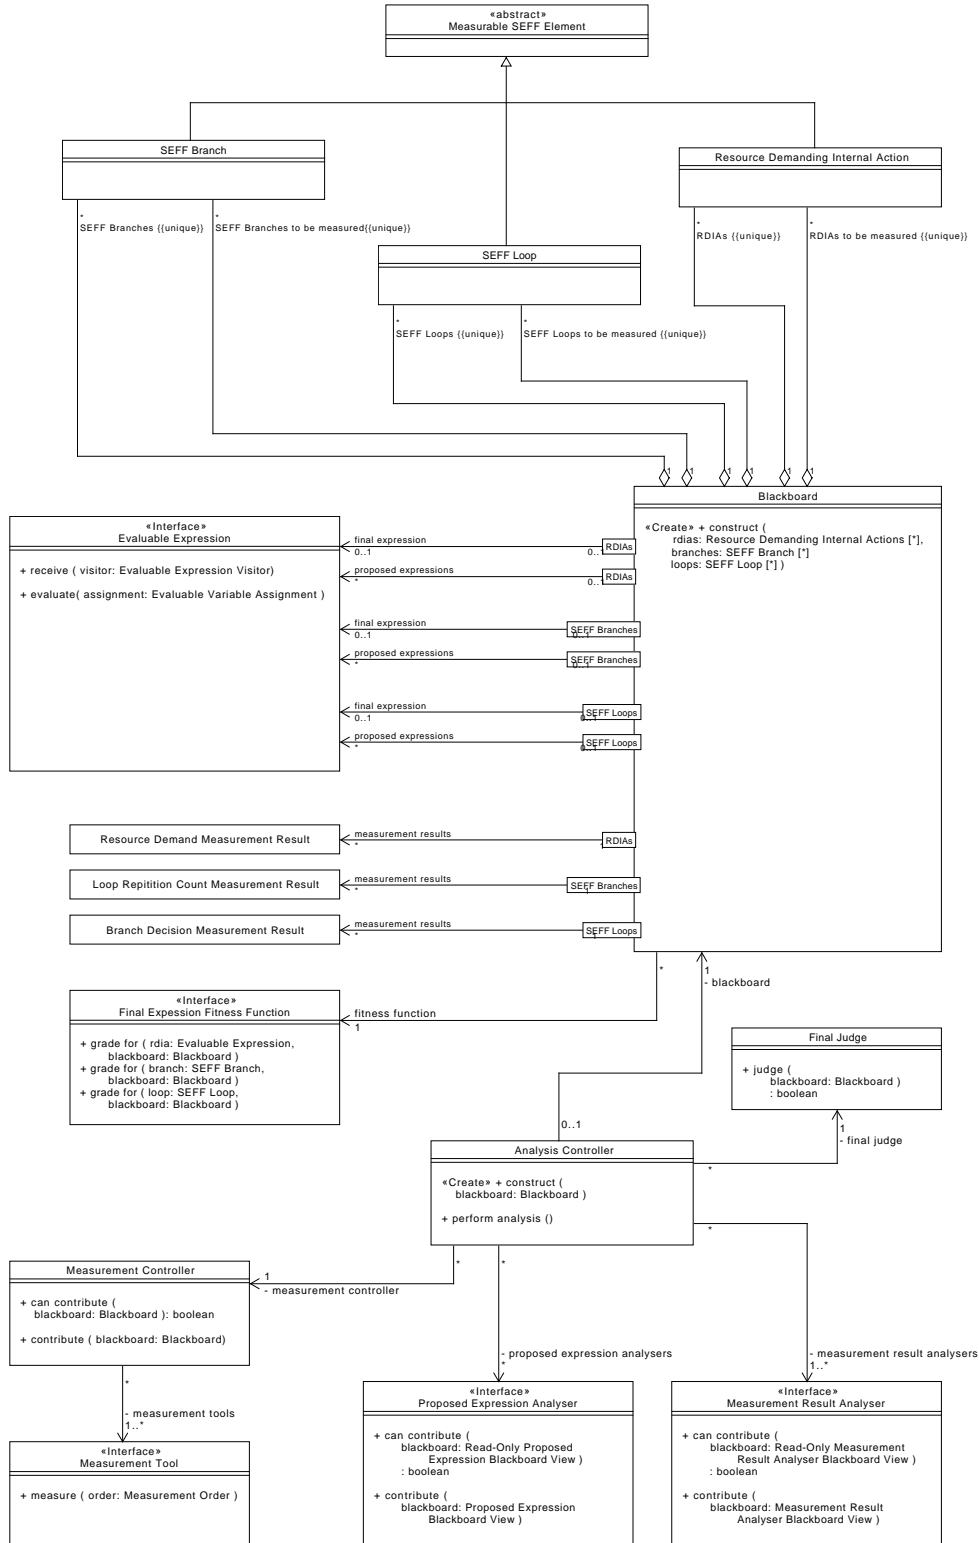


Figure 1.2: Class overview of Beagle Core. For details about specific classes, refer to [Berger et al., 2016].



Figure 1.3: Beagle Core's separation into Packages.

configuration of the used plugins after compilation. Development of the plugins can take place independently (because the Application Programming Interface (API) is fixed) and which plugins users install can depend on the software they have available.

2 Beagle's Knowledge: The Blackboard

2.1 Measurable SEFF Elements

2.2 Evaluable Expressions

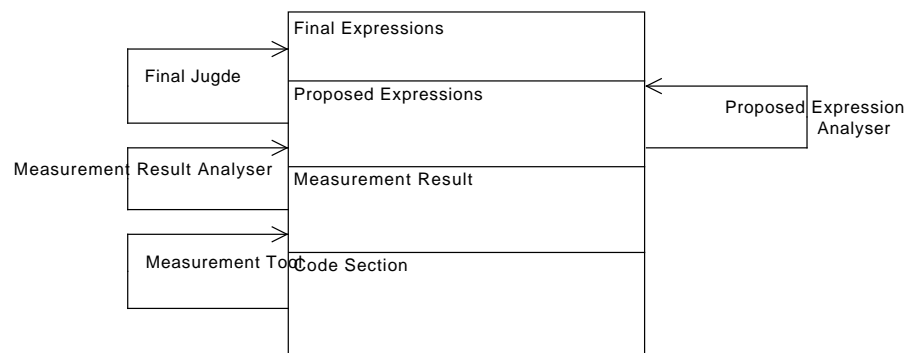


Figure 2.1: Abstraction Layers on the Blackboard


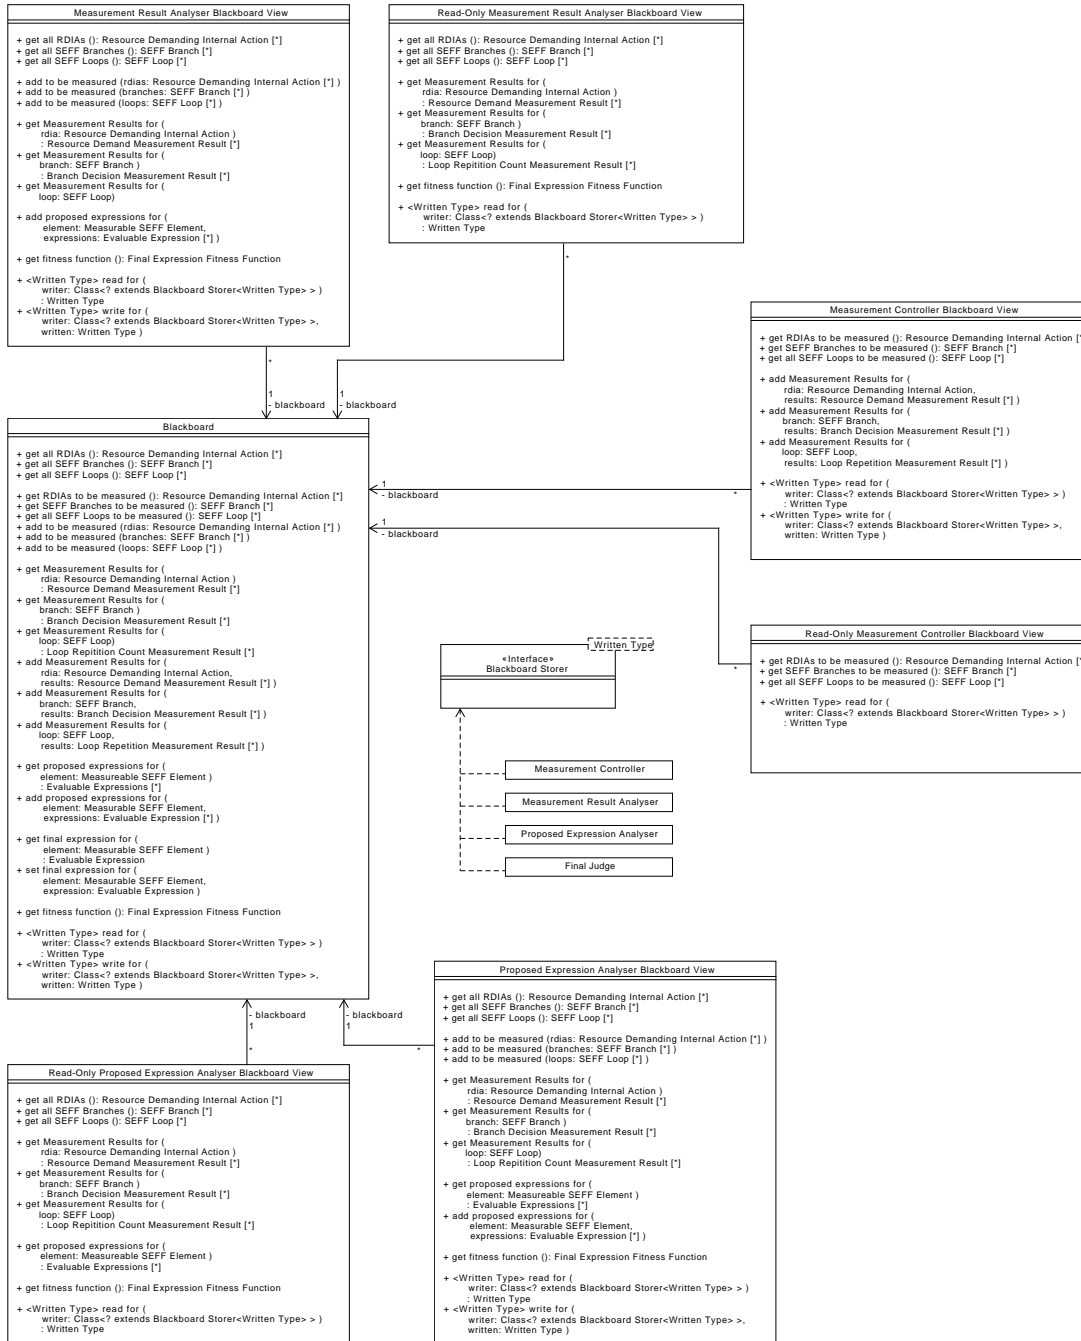


Figure 2.2: The Blackboard and its views



3 The Analysis

At Beagle’s core, the Analysis Controller controls all analysis activity by instructing the Measurement Controller, the Measurement Result Analysers, the Proposed Expression Analysers and the Final Judge. While not contributing itself, it is charge of all control flow during analysis.

Analysis Controller#perform Analysis performs a complete analysis, starting by measuring the examined software, and continuing to analyse until the Final Judge reports that the analysis is finished. There is always at most one Measurement Tool, Measurement Result Analyser, Proposed Expression Analyser or Final Judge having the control flow at any given moment during the execution of Analysis Controller#perform Analysis (“the analysis loop”).

An iteration of the analysis loop starts by asking the Measurement Controller whether it wants to conduct measurements for the current blackboard state—which will usually be the case if there is something not yet measured—, and if so, calling its #measure method. The Measurement Controller will then instruct the Measurement Tools to measure. Usually, it will tell every tool to measure all new SEFF Elements.

After that, the main loop invokes one arbitrary chosen Measurement Result Analyser reporting to be able to contribute to the current blackboard state. This analyser may then propose expressions describing the parametric dependencies of SEFF Elements’ measurement results. If there is no such analyser, an arbitrary chosen Proposed Expression Analyser reporting to be able to contribute will be invoked. It may then propose more expressions based on the ones the ones Measurement Result Analysers added to the blackboard, usually trying to improve them. If there Final Judge will be called. It decides whether enough information has been collected and Beagle can terminate. If this is the case, it also creates or selects the final result for each item that has proposed results.

The analysis loop will then be repeated until the Final Judge was called and its #judge method returned true. Figure 3.1 sketches the procedure.

3.1 Measurement

3.2 Final Judge

```

finished := false

romraBlackboardView := Read-Only Measurement Result Analyser Blackboard
View.construct(blackboard)
mraBlackboardView := MeasurementController Blackboard View.construct(blackboard)
ropeBlackboardView := Read-Only Proposed Expression Analyser Blackboard
View.construct(blackboard)
peBlackboardView := Proposed Expressions Blackboard View.construct(blackboard)

while  $\neg$ finished do
  if measurement controller.can measure(blackboard) then
    | measurement controller.measure(blackboard)
  else if  $\exists$  analyser  $\in$  measuremet result analysers :
    analyser.can contribute(romraBlackboardView) then
    | analyser.contribute(mraBlackboardView)
  else if  $\exists$  analyser  $\in$  proposed expression analysers :
    analyser.can contribute(ropeBlackboardView) then
    | analyser.contribute(peBlackboardView)
  else
    | finished := final judge.judge(blackboard)
  end
end

```

Figure 3.1: Beagle Controller#perform Analysis() in pseudocode.

4 Graphical User Interface

4.1 Overview

4.2 Most Important Classes

4.2.1 GUI Controller

Graphical User Interface (GUI) Controller is the heart of the GUI. An object of it is created (and the method `open()` is called) to open the GUI. This class controls the flow of actions over the entire analysis but gives control to Beagle Controller after the user started the analysis.

4.2.2 Beagle Controller

Beagle Controller becomes active after the user started the analysis and unless the analysis is paused is active until the analysis is finished or aborted. Beagle Controller is commanded by GUI Controller to start, pause, continue, and abort the analysis.

4.3 Control Flow

The GUI Controller is called via actions originating from context menu clicks. An object of GUI Controller is created there and the method `open()` is called on it. It creates an object of User Configuration which it from now on will be associated with. It then creates a new Beagle Analysis Wizard object associated with the same User Configuration object. Beagle Analysis Wizard then creates its Wizard Pages which are also associated with the same User Configuration objects. That's because this object stores everything the user configures, so all pages of the Wizard need to read from and/or write on it.

After the wizard has finished, control is returned to the GUI Controller object which then opens a dialog providing the user with the information that the analysis is running and the options to pause/continue or to abort the analysis. To get the analysis running, pausing, continuing, or to abort it, the GUI Controller objects calls the corresponding methods of Beagle Controller when it receives information that the wizard has finished

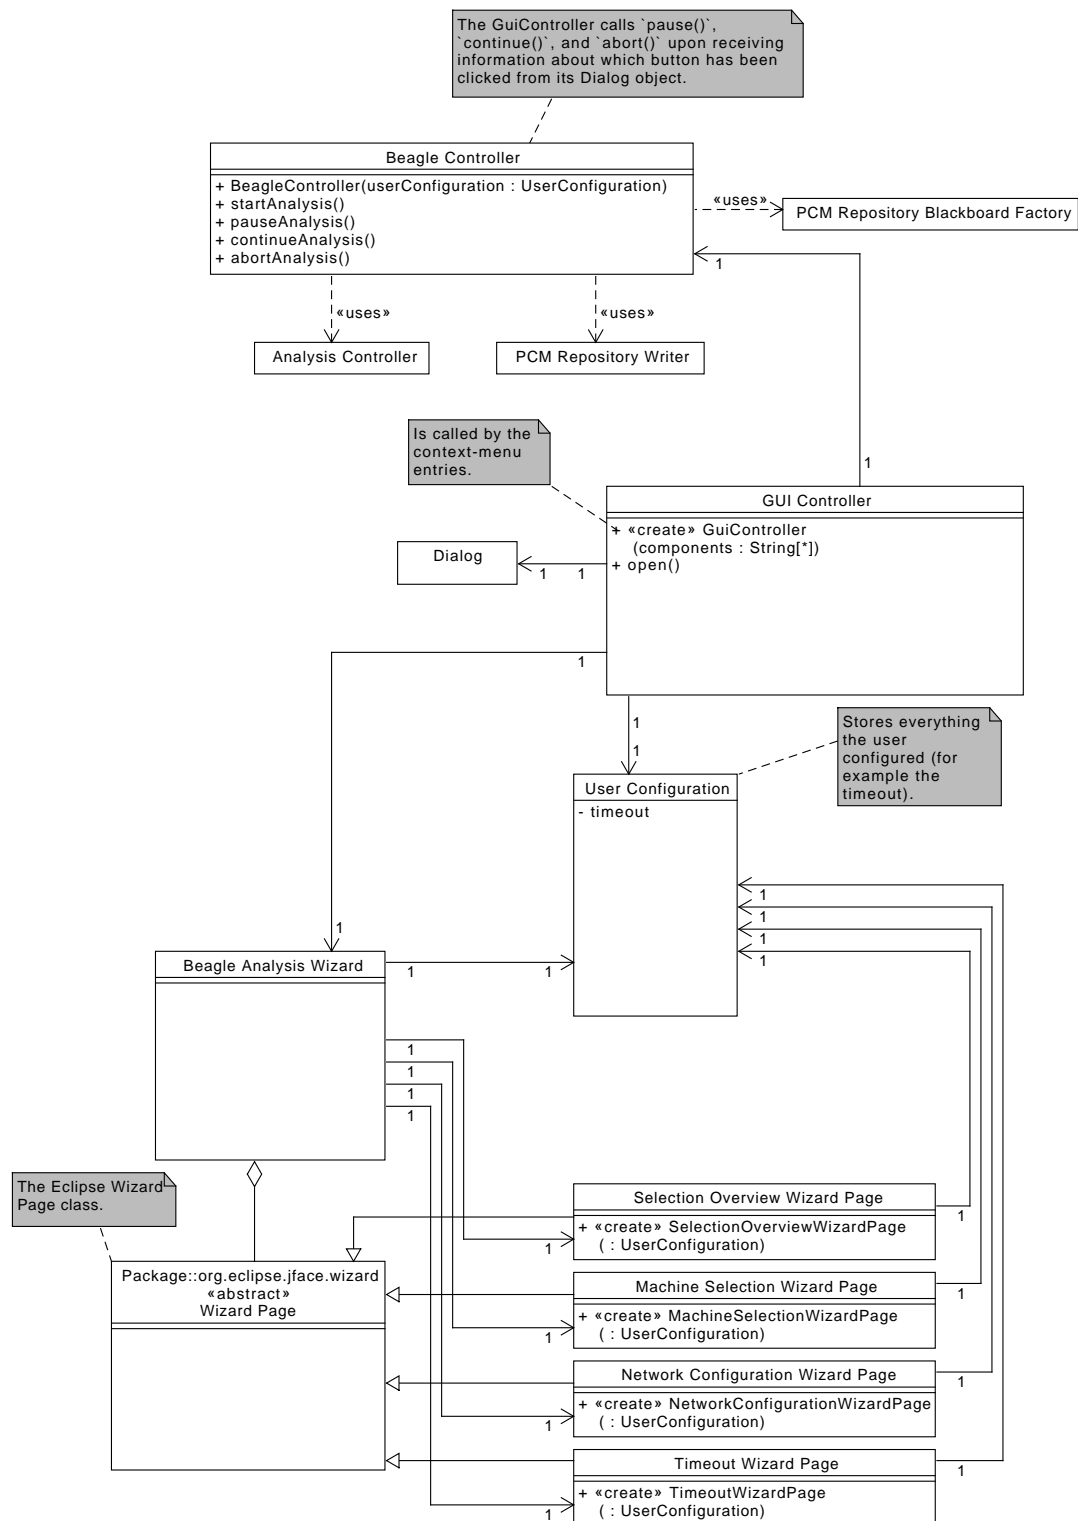


Figure 4.1: UML class diagram of the GUI classes.

or a button in the dialog the GUI Controller objects opens after the wizard has finished has been clicked.

4.4 Reasons for Chosen Design

This design has been chosen for the clarity of its flow of information and control. Information is stored either locally or in a single object every different object knows (the User Configuration object) because only the settings of the user need to be transported through all objects. The user always has control over the analysis because information can be transported from the dialog, through the GUI Controller object, to the Beagle Controller which controls the analysis.

4.5 Chosen Design Patterns

5 Requirements Specification

Beagle's software design directly follows the Software Requirements Specification (SRS) [Berger et al., 2015]. Most design decisions are proposed to fulfil mandatory requirements while allowing easily supplementing optional requirements. Section 5.1 describes changes to the SRS that proved necessary while designing Beagle. Section 5.2 describes how Beagle's requirements are reflected in its design. However, some mandatory criteria have changed, concerning the Common Trace API (CTA) .

5.1 Changes to the Software Requirements Specification

The Common Trace API

The CTA was planned to be used by Beagle to communicate with measurement software (/B10/, /F40/). While starting to investigate the API, it became apparent that it does not offer the expected functionality. The CTA is designed to return measurement results on method level, while Beagle's measurements need to be performed on sub-method (statement) level. Furthermore, there is no possibility to instrument source code, or control measurement software, the CTA can only return measurement results. Beagle's Measurement Tools will now be directly connected to specific measurement software like Kieker, without the CTA as intermediary.

Accordingly, the following modifications were made to the Software Requirements Specification (SRS):

- /B10/ Results are not transferred through the CTA.
- /F40/ Has been removed without substitution.
- /T30/ Has been removed without substitution.
- /T210/ The CTA will not be tested.

Measurement Timeout

The measurement timeout functionality described in /F50/ and /F60/ is a valuable function to Beagle. However, it is not required to successfully use Beagle for the purpose described in the Chapter 1 of the SRS. Denoting it as mandatory was a mistake.

Hence, the following modifications were made to the SRS:

/F50/ was moved to /OF70/

/F60/ was moved to /OF80/

Layout

Further minor changes have been made to the SRS, fixing broken links and layout issues.

5.2 Relating Requirements to the Design

Terms and Definitions

Common Trace API

an API developed by NovaTec GmbH for measuring the time, specific code sections need to be executed.

Kieker

“a Java-based application performance monitoring and dynamic software analysis framework.” [van Hoorn et al., 2012]

A measurement software Beagle aims to support.

Palladio Component Model

a domain-specific modelling language (DSL) used by Palladio.

It is designed to enable early performance predictions for software architectures and is aligned with a component-based software development process. [Kounev, 2009]

service effect specification

description of a component's behaviour in the PCM. SEFFs contain information about the component's calls to other components as well as its resource demands. This information is used to derive the component's performance for simulation and prediction.

Bibliography

- [Berger et al., 2015] Berger, A., Gleitze, J., Langrehr, R., Michelbach, C., Spiegler, A., and Vogt, M. (2015). Beagle—software requirements specification. Technical report, Karlsruhe Institute of Technology Department of Informatics Institute for Program Structures and Data Organization (IPD).
- [Berger et al., 2016] Berger, A., Gleitze, J., Langrehr, R., Michelbach, C., Spiegler, A., and Vogt, M. (2016). Beagle—javadoc. Technical report, Karlsruhe Institute of Technology Department of Informatics Institute for Program Structures and Data Organization (IPD).
- [Kounev, 2009] Kounev, S. (2009). *Automated extraction of palladio component models from running enterprise Java applications*. PhD thesis, University of Wuerzburg.
- [Krogmann, 2011] Krogmann, K. (2011). *Reconstruction of Software Component Architectures and Behaviour Models using Static and Dynamic Analysis*. PhD thesis, Karlsruhe Institute of Technology.
- [van Hoorn et al., 2012] van Hoorn, A., Waller, J., and Hasselbring, W. (2012). Kieker: A framework for application performance monitoring and dynamic software analysis. In *Proceedings of the 3rd joint ACM/SPEC International Conference on Performance Engineering (ICPE 2012)*, pages 247–248. ACM.