




HIONE - SINGLE-PHASE INVERTER

HiOne-(3.6-12)S-G3

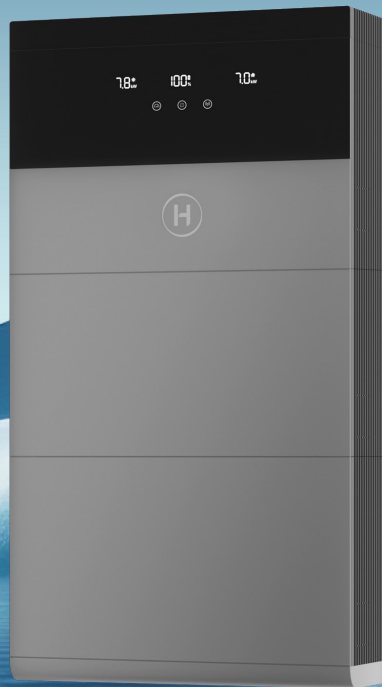

Inverter

Battery

Features

- 01 Up to 200% DC/AC oversizing to significantly boost power generation efficiency
- 02 Four independent 18 A MPPTs, perfectly compatible with high-power modules and multi-orientation rooftops
- 03 Rugged IP66 enclosure design ensures performance in harsh environments
- 04 Enables up to 150% off-grid peak output, allowing effortless startup of inductive loads
- 05 Built-in intelligent EMS automatically optimizes energy storage and consumption strategies
- 06 Integrated AFCI (Arc Fault Circuit Interrupter) actively detects arcs to prevent fire hazards

Technical Specifications

Model	HiOne-3.6S-G3	HiOne-4.6S-G3	HiOne-5S-G3	HiOne-6S-G3	HiOne-8S-G3	HiOne-10S-G3	HiOne-12S-G3
Battery							
Battery type				Li-ion			
Battery voltage range (V)				390-550			
Compatible battery model				HiOne-8B-G3			
Number of modules				1-8 ⁽¹⁾			
PV Input							
Recommended max. PV power (W)	7200	9200	10000	12000	16000	20000	24000
Max. input voltage (V)				600			
Rated voltage (V)				390			
Start-up voltage (V)				70			
MPPT voltage range (V)				50-550			
Max. input current (A)	18/18/18						18/18/18/18
Max. short circuit current (A)	27/27/27						27/27/27/27
MPPT number/Max. input strings number	3/3						4/4
AC Output							
Rated output power (W)	3680	4600	5000	6000	8000	10000	12000
Max. on-grid output apparent power (VA)	3680	4600	5000	6000	8000	10000	12000
Max. output current (A)	16.7	20.9	22.7	27.3	36.4	45.5	54.5
Max. off-grid output apparent power (VA) ⁽²⁾	5520 (10s)	6900 (10s)	7500 (10s)	9000 (10s)	12000 (10s)	15000 (10s)	18000 (10s)
Grid form	L/N/PE						
Nominal AC output voltage (V)	220/230/240						
Nominal grid frequency (Hz)	50/60						
Power factor	>0.99 (0.8 leading-0.8 lagging)						
THDi (@rated output)	<3%						
Efficiency							
Max. efficiency				98.0%			
EU efficiency				97.5%			
Protection							
Anti-islanding protection				Integrated			
PV string input reverse polarity protection				Integrated			
Insulation resistor detection				Integrated			
Residual current monitoring unit				Integrated			
AC overcurrent protection				Integrated			
AC short circuit protection				Integrated			
AC overvoltage and undervoltage protection				Integrated			
Surge protection	DC Type II / AC Type II						
General							
Dimensions (W × H × D [mm])	620 × 360 × 255						
Weight (kg)	27						
Mounting	Wall-mounted / Floor-standing						
Operating temperature (°C)	-30 to +65 (>45, derating)						
Relative humidity	0-95%, no condensation						
Cooling	Natural convection			Intelligent air cooling			
Topology	Non-isolation						
Altitude (m)	≤4000						
Protection degree	IP66						
Noise (dB)	<35			<55			
User interface	LED & App						
Communication	RS485, Bluetooth, Wi-Fi / Ethernet / 4G (optional)						
Warranty	10 Years						
Standard Compliance							
Grid connection standard	EN 50549-1/-10, NF EN 50549-1/-10, CEI0-21, AS/NZS 4777.2, PEA/MEA, TOR Erzeuger Type A, NTS 631, UNE 217001, UNE 217002						
Safety / EMC standard	IEC/EN 61000-6-1/-2/-3/-4, EN 62920, IEC/EN 62109-1&2						

(1) Up to four modules can be stacked in one battery tower.

(2) Applicable only when the inverter is connected to Hoymiles gateway.