DUBLIN CITY UNIVERSITY

ELECTRONIC AND COMPUTER ENGINEERING

EE500 Network Performance

Assignment 1

Author

Michael Lenehan   michael.lenehan4@mail.dcu.ie
Student Number: 15410402

08/12/2019

Declaration

I declare that this material, which I now submit for assessment, is entirely my own work and has not been taken from the work of others, save and to the extent that such work has been cited and acknowledged within the text of my work. I understand that plagiarism, collusion, and copying are grave and serious offences in the university and accept the penalties that would be imposed should I engage in plagiarism, collusion or copying. I have read and understood the Assignment Regulations set out in the module documentation. I have identified and included the source of all facts, ideas, opinions, and viewpoints of others in the assignment references. Direct quotations from books, journal articles, internet sources, module text, or any other source whatsoever are acknowledged and the source cited are identified in the assignment references. This assignment, or any part of it, has not been previously submitted by me or any other person for assessment on this or any other course of study.

I have read and understood the DCU Academic Integrity and Plagiarism at `https://www4.dcu.ie/sites/default/files/policy/1%20-%20integrity_and_plagiarism_ovpaa_v3.pdf` and IEEE referencing guidelines found at `https://loop.dcu.ie/mod/url/view.php?id=448779`.

Signed: _____   Date: 08/12/2019

       Michael Lenehan

Contents

1 Introduction

2 Part 1: Data Transmission over the WiFi Network

2.1 Question A:

2.1.1 Part 1:

Within the wifi-example-sim.cc file, the simulation is given a run time of 20 seconds, a packet size of 1000 bytes and a 0.05 second delay between the transmission of packets. This corresponds to a total of 400 packets sent over the space of 20 seconds.

$$R = \frac{rxPackets * packetSize * 8}{delay}$$
$$\frac{400 * 1000 * 8}{4.9 \times 10^{-4}}$$
$$6.53 \times 10^9 \, bits$$

Equation 1: Bitrate of Data Traffic (Kbps)

$$Throughput = \frac{rxPackets * packetSize * 8}{txTime}$$
$$\frac{400 * 1000 * 8}{20}$$
$$\frac{3,200,000}{20}$$
$$160,000$$
$$1.6 \, Kbps$$

Equation 2: Average Throughput (Kbps)

Average Throughput Over Distance
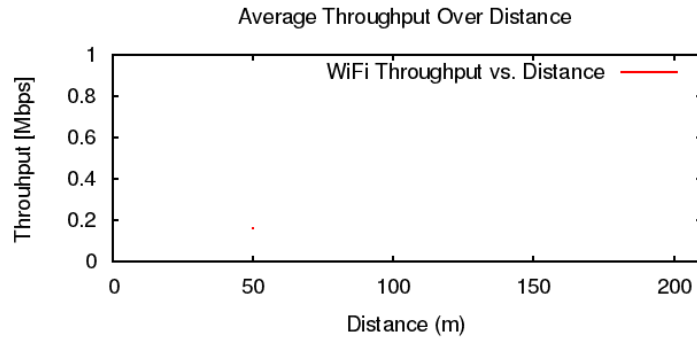

Figure 1: Throughput for a single user at a distance of 50 meters

Delay time is given within the wifi-example-sim.cc file as measured in nanoseconds. Form the output, this value is 490381ns. This can be calculated as follows:

$$\overline{delay} = \frac{delaySum}{rxPackets}$$
$$\frac{196,152,732}{400}$$
$$= 490,381.83ns$$
$$= 4.9 \times 10^{-4}s$$

Equation 3: Average Delay (s)
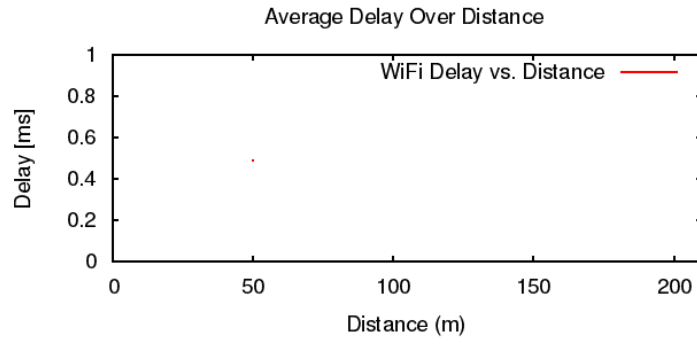
Figure 2: Delay for a single user at a distance of 50 meters

Packet loss ratio is given by the following formula:

$$PLR = \frac{lostPackets}{rxPackets + lostPackets}$$
$$\frac{0}{400 + 0}$$
$$= \quad 0$$

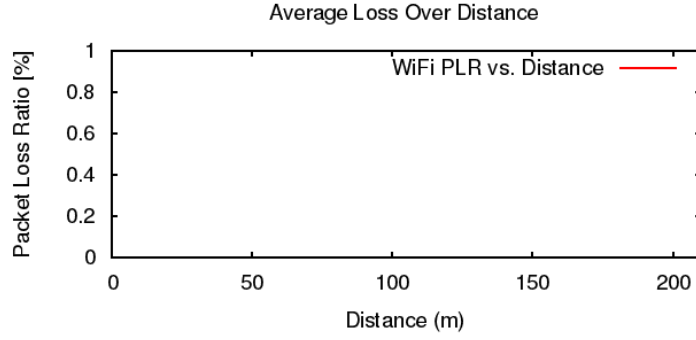Equation 4: Average Packet Loss Ratio

Figure 3: Packet Loss Ratio for a single user at a distance of 50 meters

2.1.2 Part 2:

Within the wifi-example-sim.cc file, the transmission bitrate can be modified in one of two ways. By modifying the size of the packets being transmit, or by modifying the delay between packet transmissions. This is shown in the following calculations:

$$R = \frac{rxPackets \times packetSize \times 8}{txTime}$$

$$\frac{R \times txTime}{packetSize \times 8} = rxPackets \qquad or \qquad \frac{R \times txTime}{rxPackets \times 8} = packetSize$$

$$rxPackets = \frac{txTime}{delay}$$

Equation 5: Calculation for Bitrate Modification

The following table shows the number of packets to be sent (modified by the delay between packet transmissions), or the size of packet to be sent in order to meet the required data rates.

Table 1: Bitrate Calculation Results

Bitrate	rxPackets	Delay	packetSize
1Mbps	2,500	8×10^{-3}	625
1.5Mbps	3,750	5.3×10^{-3}	937.5
5Mbps	12,500	1.6×10^{-3}	3125
10Mbps	25,000	8×10^{-4}	6250
20Mbps	50,000	4×10^{-4}	12,500

6

For the purposes of this section, the delay between the packet transmissions will be modified. Modifying packet sizes requires using half bytes for packet sizes.

The following equations show the throughput, delay, and packet loss ratio for the systems with the above bitrates.

$$Throughput = \frac{rxPackets * 1000 * 8}{txTime}$$

$$TP_{8\times10^{-3}} = \frac{2500 * 1000 * 8}{20}$$

$$= 1000 Kbps$$

$$TP_{5.3\times10^{-3}} = \frac{3774 * 1000 * 8}{20}$$

$$= 1509.6 Kbps$$

$$TP_{1.6\times10^{-3}} = \frac{12500 * 1000 * 8}{20}$$

$$= 5000 Kbps$$

$$TP_{8\times10^{-4}} = \frac{24997 * 1000 * 8}{20}$$

$$= 9998.8 Kbps$$

$$TP_{4\times10^{-4}} = \frac{34368 * 1000 * 8}{20}$$

$$= 13747.2 Kbps$$

Equation 6: Average Throughput (Kbps

From these calculations, it can be seen that a maximum throughput of 13.7Mbps was achieved. Loss begins to occur at approximately 10Mbps, limiting the throughput. The throughput can be seen plotted against the increasing transmission intervals in Figure 4
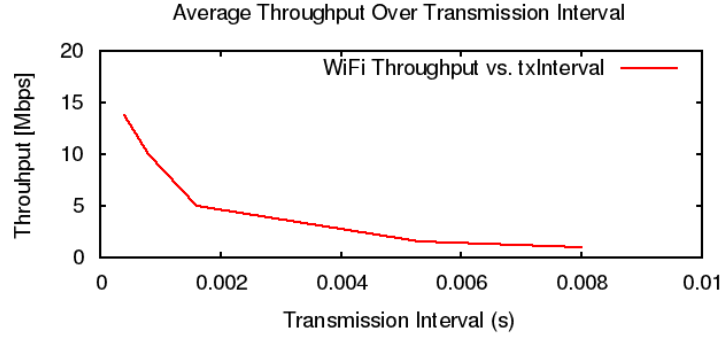
Figure 4: Throughput for transmission intervals as outlined in Table 1

$$\overline{delay} = \frac{delaySum}{rxPackets}$$

$$\overline{delay}_{8 \times 10^{-3}} = \frac{1102533332}{2500}$$

$$= 441013.3328ns$$

$$\overline{delay}_{5.3 \times 10^{-3}} = \frac{1649679480}{3774}$$

$$= 437116.9793ns$$

$$\overline{delay}_{1.6 \times 10^{-3}} = \frac{5484597352}{12500}$$

$$= 438767.7882ns$$

$$\overline{delay}_{8 \times 10^{-4}} = \frac{12434305114}{24497}$$

$$= 497431.8964ns$$

$$\overline{delay}_{4 \times 10^{-4}} = \frac{7873637069728}{34368}$$

$$= 229097912.9ns$$

Equation 7: Average Delay (s)

These calculations show that there is an increase in delay as the bitrate increases (i.e. the transmission interval decreases). This is further demonstrated in Figure 5.

8
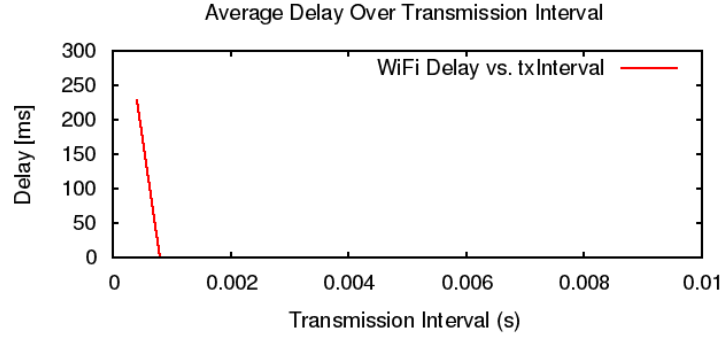
Figure 5: Delay for transmission intervals as outlined in Table 1

$$PLR = \frac{lostPackets}{rxPackets + lostPackets}$$

$$PLR_{8 \times 10^{-3}} = \frac{0}{2500 + 0}$$

$$= 0$$

$$PLR_{5.3 \times 10^{-3}} = \frac{0}{3774 + 0}$$

$$= 0$$

$$PLR_{1.6 \times 10^{-3}} = \frac{0}{12500 + 0}$$

$$= 0$$

$$PLR_{8 \times 10^{-4}} = \frac{3}{24997 + 3}$$

$$= 1.2 \times 10^{-4}$$

$$PLR_{4 \times 10^{-4}} = \frac{15632}{34368 + 15632}$$

$$= 0.30724$$

Equation 8: Average Packet Loss Ratio

Again, as there is an increase in the bitrate, there is an increase in the loss within the system, with a maximum loss of 30%, which can be clearly seen within Figure 6.
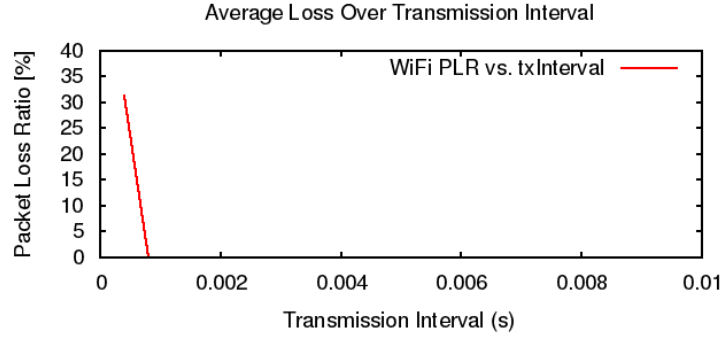
Figure 6: Loss for transmission intervals as outlined in Table 1

This section displays clearly that there is a direct relation between the bitrate and the throughput, delay, and loss. As the bitrate was increased in each test case, the throughput increased, until the point at which the loss and delay began to affect the linearity of the increase.

2.2 Question B:

This section investigates the effect of distance on throughput, delay and loss within a single user, single access point system.

$$Throughput = \frac{rxPackets * 1000 * 8}{txTime}$$

$$TP_{0-110} = \frac{400 * 1000 * 8}{20}$$

$$= 160Kbps$$

$$TP_{120} = \frac{13 * 1000 * 8}{20}$$

$$= 5.2Kbps$$

$$TP_{130-150} = \frac{0 * 1000 * 8}{20}$$

$$= 0Kbps$$

Equation 9: Average Throughput (Kbps) over distances of 0-150m
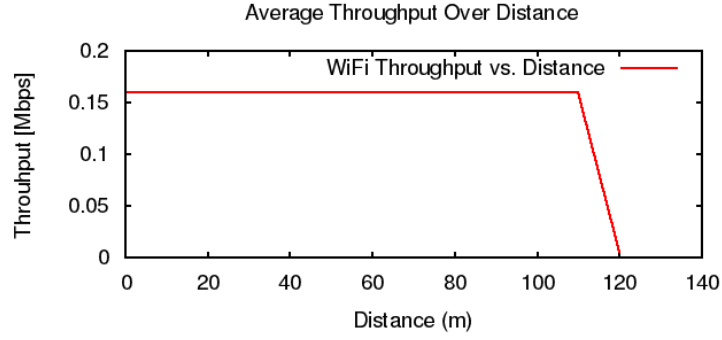
Figure 7: Throughput as measured at distances between 0 and 150 meters

$$\overline{delay}_0 = 271582ns$$
$$\overline{delay}_{10} = 271615ns$$
$$\overline{delay}_{20} = 271648ns$$
$$\overline{delay}_{30} = 397353ns$$
$$\overline{delay}_{40} = 381876ns$$
$$\overline{delay}_{50} = 490381ns$$
$$\overline{delay}_{60} = 605123ns$$
$$\overline{delay}_{70} = 649954ns$$
$$\overline{delay}_{80} = 835599ns$$
$$\overline{delay}_{90} = 1279691ns$$
$$\overline{delay}_{100} = 1574269ns$$
$$\overline{delay}_{110} = 1723305ns$$
$$\overline{delay}_{120} = 9362323ns$$

Equation 10: Average Delay (ns) over distances of 0-150m

Beyond a distance of 120m, due to there being a throughput of 0Kbps, there is no delay value. These values can be seen in Figure 8

11
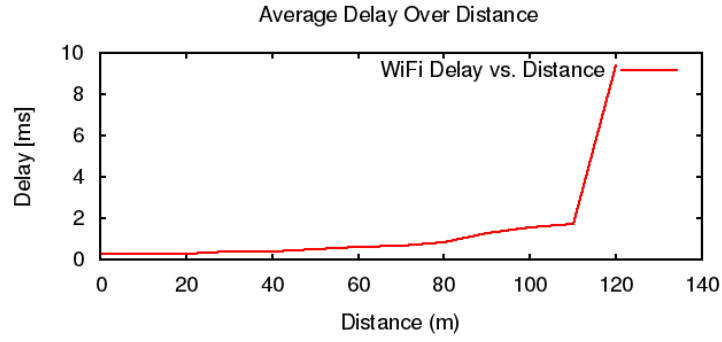
Figure 8: Delay as measured at distances between 0 and 150 meters

$$PLR = \frac{lostPackets}{rxPackets + lostPackets}$$

$$TP_{0-110} = \frac{0}{400+0}$$

$$= 0$$

$$TP_{120} = \frac{387}{13+387}$$

$$= 0.9675$$

$$TP_{130-150} = \frac{400}{0+400}$$

$$= 1$$

Equation 11: Packet Loss Ratio over distances of 0-150m
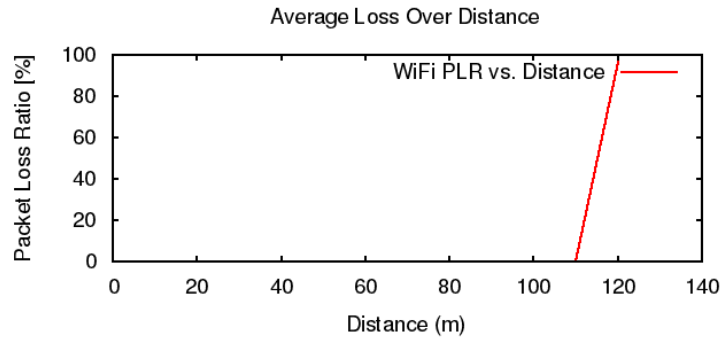
Figure 9: Packet Loss Ratio as measured at distances between 0 and 150 meters

2.3   Question C:

2.3.1   Part 1:

$$Throughput = \frac{rxPackets * 1000 * 8}{txTime}$$
$$TP_{user_1} = \frac{5000 * 1000 * 8}{20}$$
$$= 2000Kbps$$
$$TP_{user_2} = \frac{4999 * 1000 * 8}{20}$$
$$= 1999.6Kbps$$

Equation 12: Average Throuhgput (Kbps)
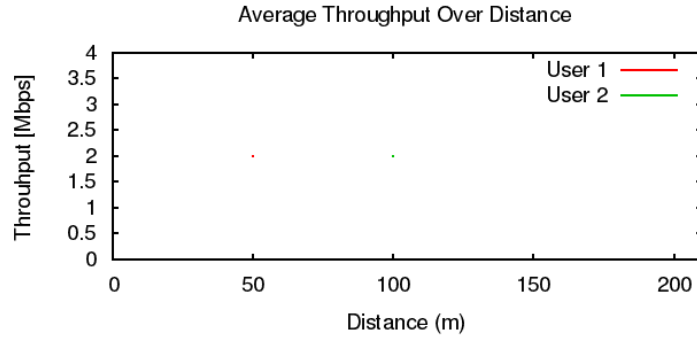
Figure 10: Throughput for 2 users, one at a distance of 50m, one at a distance of 100m

$$\overline{delay} = \frac{delaySum}{rxPackets}$$

$$\overline{delay}_{user1} = \frac{2224452124}{5000}$$

$$= 444890.4248ns$$

$$\overline{delay}_{user2} = \frac{10823682785}{4999}$$

$$= 2165169.591ns$$

Equation 13: Average Delay (s)
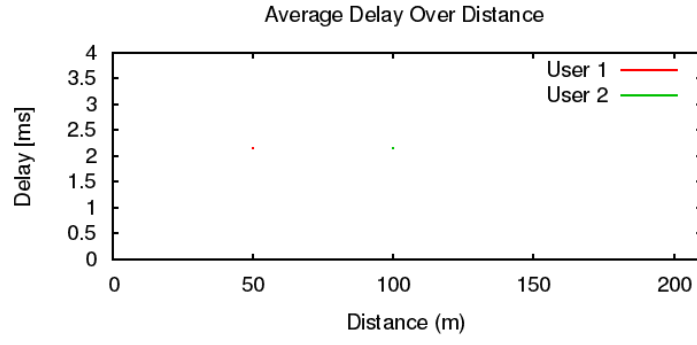
Figure 11: Delay for 2 users, one at a distance of 50m, one at a distance of 100m

$$PLR = \frac{lostPackets}{rxPackets + lostPackets}$$

$$PLR_{user1} = \frac{0}{5000 + 0}$$

$$= 0$$

$$PLR_{user2} = 14999 + 1$$

$$= 0.0002$$

Equation 14: Average Packet Loss Ratio
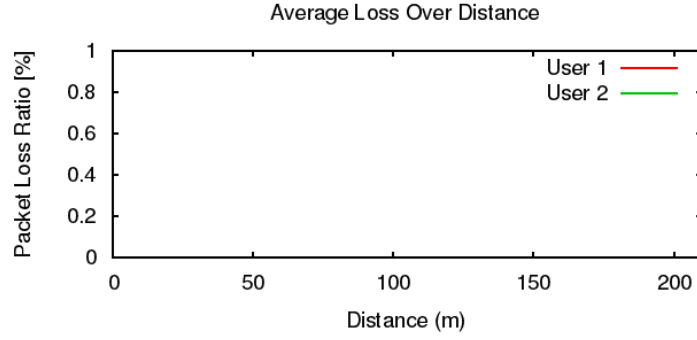
Figure 12: Loss for 2 users, one at a distance of 50m, one at a distance of 100m

2.3.2 Part 2:

$$Throughput = \frac{rxPackets * 1000 * 8}{txTime}$$

$$TP_{1-10Users} = 1000Kbps$$

$$TP_{20Users} = \frac{1686.45 * 1000 * 8}{20}$$

$$= 647.58Kbps(\text{using average number of rxPackets})$$

$$TP_{20Users} = 989.92Kbps(\text{using Bash Script})$$

$$TP_{50User} = 989.92Kbps(\text{using Bash Script})$$
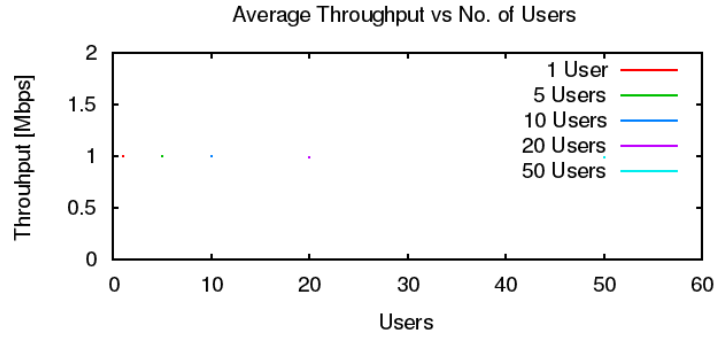
Figure 13: Throughput for systems with 0 to 50 users

$$\overline{delay} = \frac{delaySum}{rxPackets}$$

$$\overline{delay}_{1User} = 441013ns$$

$$\overline{delay}_{5User} = 2807059ns$$

$$\overline{delay}_{10User} = 8420910ns$$

$$\overline{delay}_{20User} = 277970000ns$$

$$\overline{delay}_{50User} = 1530570000ns$$
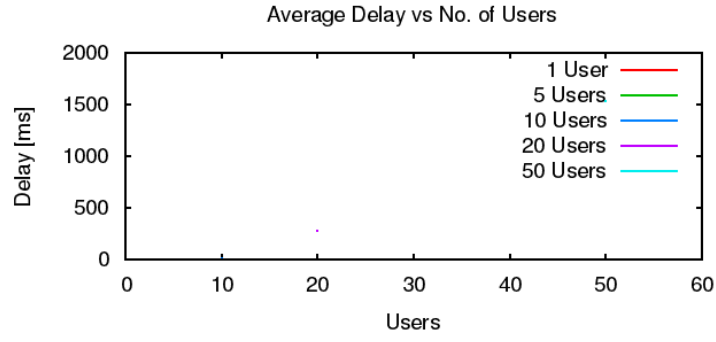
Figure 14: Delay for systems with 0 to 50 users

$$PLR = \frac{lostPackets}{rxPackets + lostPackets}$$

$$PLR_{1User} = 0$$

$$PLR_{5User} = 0$$

$$PLR_{10User} = 0$$

$$PLR_{20User} = 1.08\%$$

$$PLR_{50User} = 1.08\%$$

18
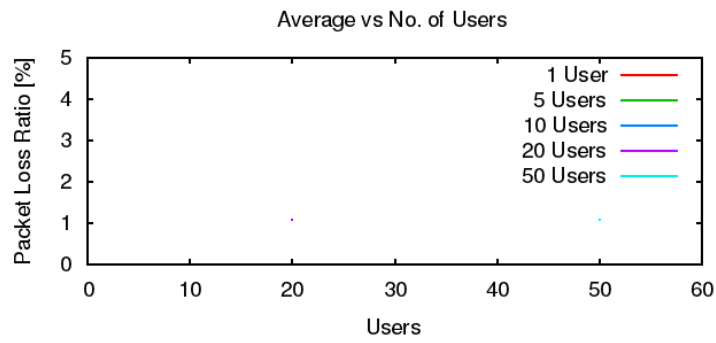
Figure 15: Loss for systems with 0 to 50 users

2.3.3 Part 3:
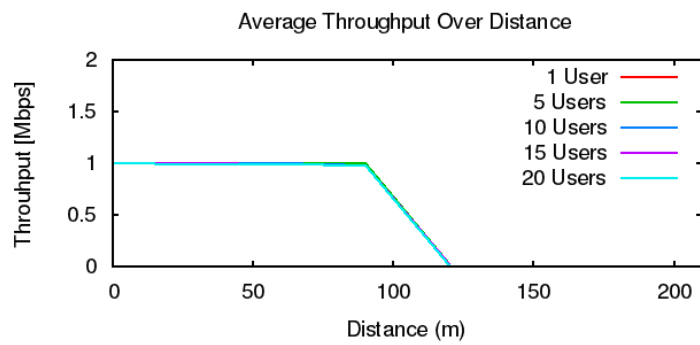
Figure 16: Throughput for systems with 0 to 20 users, over distances from 0 to 150 meters

Table 2: Throughput Values (Kbps) for 1-20 User Systems at Distances of 0-150m

Distance	1 User	5 Users	10 Users	15 Users	20 Users
0	1000	1000	1000	1000	1000
30	1000	1000	1000	1000	990.8
60	1000	1000	1000	986	986
90	1000	1000	974.8	975.6	975.6
120	17.6	18.4	18.4	17.6	15.2
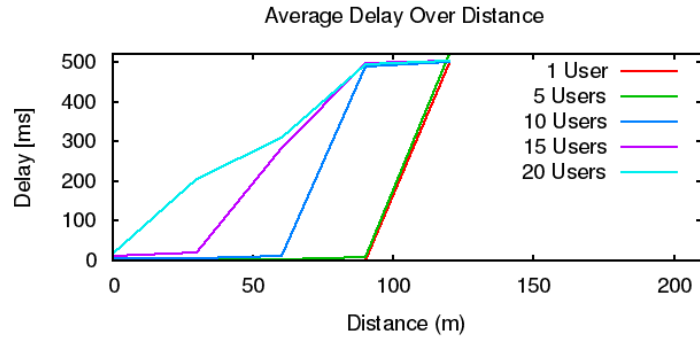
Figure 17: Delay for systems with 0 to 20 users, over distances from 0 to 150 meters

Table 3: Delay Values (ms) for 1-20 User Systems at Distances of 0-150m

Distance	1 User	5 Users	10 Users	15 Users	20 Users
0	0.194653	1.57338	5.6031	11.2192	18.5429
30	0.347009	2.32888	7.16022	19.1675	203.886
60	0.566218	3.44795	12.5859	283.532	310.421
90	1.27689	8.00458	488.852	496.113	494.484
120	497.965	523.288	499.474	504.065	504.108
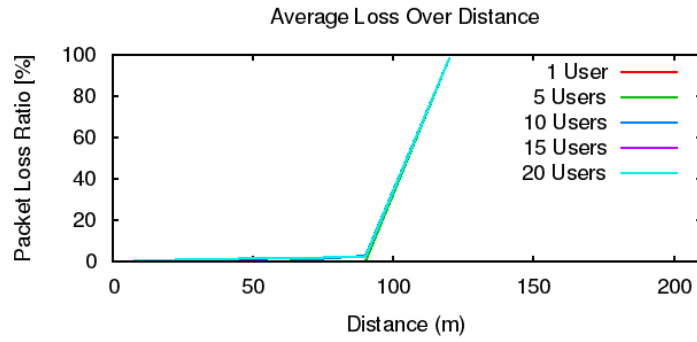
Figure 18: Loss for systems with 0 to 20 users, over distances from 0 to 150 meters

Table 4: Packet Loss Ratio for 1-20 User Systems at Distances of 0-150m

Distance	1 User	5 Users	10 Users	15 Users	20 Users
0	0	0	0	0	0
30	0	0	0	0	0.92
60	0	0	0	1.4	1.4
90	0	0	2.52	2.44	2.44
120	98.24	98.16	98.16	98.24	98.48

3 Part 2: Results and Comparison and Analysis

4 Conclusion

5 Appendix

5.1 Bash Scripts

The following bash scripts were used to execute the simulations in ns-3, to save the outputs to .db files, and to plot the outputs from the simulation.

5.1.1 Question A Part 1 Bash Script

```sh
#!/bin/sh

TRIALS="1"
DBPREFIX="P1QAP1"
SIMTIME=20 #Default in wifi-example-sim.cc: The
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck=`which sqlite3`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sqlite3 (wifi-example
    -sim does not)."
  exit 255
fi

pCheck=`which gnuplot`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi-example
    -sim does not)."
  exit 255
fi

pCheck=`which sed`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sed (wifi-example-sim
      does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/

if [ -e ../../P1QAP1.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" -o "$ANS" = "y" ]
```

```
    then
      echo Deleting database
      rm ../../P1QAP1.db
    fi
fi

for trial in $TRIALS
do
  echo Trial $trial
  ../../waf --run "WiFi --dbPrefix=$DBPREFIX --run=run-
    $DBPREFIX-$trial"
done

#
#Another SQL command which just collects raw numbers of
    frames receved.
#
#CMD="select Experiments.input,avg(Singletons.value) \
#     from Singletons,Experiments \
#     where Singletons.run = Experiments.run AND \
#             Singletons.name='wifi-rx-frames' \
#     group by Experiments.input \
#     order by abs(Experiments.input) ASC;"

mv ../../P1QAP1.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
    from Singletons rx, Singletons tx, Experiments exp,
        Singletons delay \
    where rx.run = tx.run AND \
          rx.run = exp.run AND \
          delay.run = exp.run AND \
          rx.variable='receiver-rx-packets' AND \
          tx.variable='sender-tx-packets' AND \
          delay.variable='delay-average' \
    group by exp.input \
    order by abs(exp.input) ASC;"

sqlite3 -noheader P1QAP1.db "$CMD" > wifi-default.temp
sed -i "s/|/ /g" wifi-default.temp
awk '{print $1 " " $4*8*1000/20/1000/1000}' wifi-default.
    temp >throughput.data
awk '{print $1 " " $5/1000000}' wifi-default.temp >delay.
    data
awk '{print $1 " " ($3-$4)/$3*100}' wifi-default.temp >
    loss.data

gnuplot wifi-p1qap1.gnuplot

#Clean Directory
```

```sh
mv *.data *.db *.temp QA/P1/Data
mv *.png QA/P1/Images
echo "Done; data in wifi-default.data, plot in wifi-
    default.eps"
```

5.1.2 Question A Part 2 Bash Script

```sh
#!/bin/sh

TRIALS="1"
DBPREFIX="P1QAP2"
TXINTERVAL="0.008 0.0053 0.0016 0.0008 0.0004"

SIMTIME=20 #Default in wifi-example-sim.cc: The
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck=`which sqlite3`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sqlite3 (wifi-example
      -sim does not)."
  exit 255
fi

pCheck=`which gnuplot`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi-example
      -sim does not)."
  exit 255
fi

pCheck=`which sed`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sed (wifi-example-sim
      does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/

if [ -e ../../P1QAP2.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" -o "$ANS" = "y" ]
```

```
    then
      echo Deleting database
      rm ../../P1QAP2.db
    fi
fi

for trial in $TRIALS
do
  for txinterval in $TXINTERVAL
  do
    echo Trial $trial, txInterval $txinterval
    ../../waf --run "WiFi --dbPrefix=$DBPREFIX --
        txInterval=$txinterval --run=run-$trial-$DBPREFIX-
        $txinterval"
  done
done

#
#Another SQL command which just collects raw numbers of
    frames receved.
#
#CMD="select Experiments.input,avg(Singletons.value) \
#    from Singletons,Experiments \
#    where Singletons.run = Experiments.run AND \
#          Singletons.name='wifi-rx-frames' \
#    group by Experiments.input \
#    order by abs(Experiments.input) ASC;"

mv ../../P1QAP2.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
    from Singletons rx, Singletons tx, Experiments exp,
        Singletons delay \
    where rx.run = tx.run AND \
          rx.run = exp.run AND \
          delay.run = exp.run AND \
          rx.variable='receiver-rx-packets' AND \
          tx.variable='sender-tx-packets' AND \
          delay.variable='delay-average' \
    group by exp.input \
    order by abs(exp.input) ASC;"


sqlite3 -noheader P1QAP2.db "$CMD" > wifi-default.temp
sed -i "s/|/ /g" wifi-default.temp
awk '{print $1 " " $4*8*1000/20/1000/1000}' wifi-default.
    temp >throughput.data
awk '{print $1 " " $5/1000000}' wifi-default.temp >delay.
    data
```

25

```
awk '{ print $1 " " ($3−$4)/$3*100 }' wifi−default.temp >
    loss.data

gnuplot wifi−p1qap2.gnuplot

#Clean Directory
mv *.data *.db *.temp QA/P2/Data
mv *.png QA/P2/Images
echo "Done; data in wifi−default.data, plot in wifi−
    default.eps"
```

5.1.3   Question B Bash Script

```
#!/bin/sh

DISTANCES="0 10 20 30 40 50 60 70 80 90 100 110 120 130
    140 150"
DBPREFIX="P1QB"
TRIALS="1"
SIMTIME=20 #Default in wifi−example−sim.cc: The
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck='which sqlite3'
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires sqlite3 (wifi−example
    −sim does not)."
  exit 255
fi

pCheck='which gnuplot'
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi−example
    −sim does not)."
  exit 255
fi

pCheck='which sed'
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires sed (wifi−example−sim
        does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/
```

```
if [ -e ../../P1QB.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" -o "$ANS" = "y" ]
  then
    echo Deleting database
    rm ../../P1QB.db
  fi
fi

for trial in $TRIALS
do
  for distance in $DISTANCES
  do
    echo Trial $trial, distance $distance
    ../../waf --run "WiFi --distance=$distance --dbPrefix
      =$DBPREFIX --run=run-$trial-$DBPREFIX-$distance"
  done
done

#
#Another SQL command which just collects raw numbers of
    frames receved.
#
#CMD="select Experiments.input, avg(Singletons.value) \
#     from Singletons, Experiments \
#     where Singletons.run = Experiments.run AND \
#           Singletons.name='wifi-rx-frames' \
#     group by Experiments.input \
#     order by abs(Experiments.input) ASC;"

mv ../../P1QB.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
    from Singletons rx, Singletons tx, Experiments exp,
        Singletons delay \
    where rx.run = tx.run AND \
          rx.run = exp.run AND \
          delay.run = exp.run AND \
          rx.variable='receiver-rx-packets' AND \
          tx.variable='sender-tx-packets' AND \
          delay.variable='delay-average' \
    group by exp.input \
    order by abs(exp.input) ASC;"


sqlite3 -noheader P1QB.db "$CMD" > wifi-default.temp
```

```
sed −i "s/|/ /g" wifi−default.temp
awk '{print $1 " " $4∗8∗1000/20/1000/1000}' wifi−default.
    temp >throughput.data
awk '{print $1 " " $5/1000000}' wifi−default.temp >delay.
    data
awk '{print $1 " " ($3−$4)/$3∗100}' wifi−default.temp >
    loss.data

gnuplot wifi−p1qb.gnuplot

#Clean Directory
mv ∗.data ∗.db ∗.temp QB/Data
mv ∗.png QB/Images
echo "Done; data in wifi−default.data, plot in wifi−
    default.eps"
```

5.1.4 Question C Part 1 Bash Script

```
#!/bin/sh

DISTANCE=50
DBPREFIX="P1QCP1"
TXINTERVAL="0.004"
USERS="2"
TRIALS="1"
SIMTIME=20 #Default in wifi−example−sim.cc: The
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck='which sqlite3'
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires sqlite3 (wifi−example
    −sim does not)."
  exit 255
fi

pCheck='which gnuplot'
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi−example
    −sim does not)."
  exit 255
fi

pCheck='which sed'
if [ −z "$pCheck" ]
then
```

```
  echo "ERROR: This script requires sed (wifi−example−sim
      does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/

if [ −e ../../P1QCP1.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" −o "$ANS" = "y" ]
  then
    echo Deleting database
    rm ../../P1QCP1.db
  fi
fi

for trial in $TRIALS
do
  echo Trial $trial, user 1 distance $DISTANCE
  ../../waf −−run "WiFi −−users=$USERS −−distance=
      $DISTANCE −−dbPrefix=$DBPREFIX −−txInterval=
      $TXINTERVAL −−run=run−$trial−$DBPREFIX−$USERS"
done

#
#Another SQL command which just collects raw numbers of
    frames received.
#
#CMD="select Experiments.input,avg(Singletons.value) \
#     from Singletons,Experiments \
#     where Singletons.run = Experiments.run AND \
#           Singletons.name='wifi−rx−frames' \
#     group by Experiments.input \
#     order by abs(Experiments.input) ASC;"

mv ../../P1QCP1.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
     from Singletons rx, Singletons tx, Experiments exp,
         Singletons delay \
     where rx.run = tx.run AND \
           rx.run = exp.run AND \
           delay.run = exp.run AND \
           rx.variable='receiver−rx−packets' AND \
           tx.variable='sender−tx−packets' AND \
           delay.variable='delay−average' \
     group by exp.input \
     order by abs(exp.input) ASC;"
```

```
sqlite3 -noheader P1QCP1.db "$CMD" > wifi-default.temp
sed -i "s/|/ /g" wifi-default.temp
awk '{ if ($2=="user1") { print $1 " " $4
    *8*1000/20/1000/1000 > "usr1TP.data"}
 else if ($2=="user2") { print 100 " " $4
     *8*1000/20/1000/1000 > "usr2TP.data"}
 else { print $1 " " $4*8*1000/20/1000/1000 > "throughput.
     data"}
}' wifi-default.temp
awk '{ if ($2=="user1") { print $1 " " $5/1000000 > "
    usr1delay.data"}
 else if ($2=="user2") { print 100 " " $5/1000000 > "
     usr2delay.data"}
 else { print $1 " " $5/1000000 > "delay.data"}
}' wifi-default.temp
awk '{ if ($2=="user1") { print $1 " " ($3-$4)/$3*100 > "
    usr1loss.data"}
 else if ($2=="user2") { print 100 " " ($3-$4)/$3*100 > "
     usr2loss.data"}
 else { print $1 " " ($3-$4)/$3*100 > "loss.data"}
}' wifi-default.temp

gnuplot wifi-p1qcp1.gnuplot

#Clean Directory
mv *.data *.db *.temp QC/P1/Data
mv *.png QC/P1/Images
echo "Done; data in wifi-default.data, plot in wifi-
    default.eps"
```

5.1.5 Question C Part 2 Bash Script

```
#!/bin/sh

DISTANCES="50"
DBPREFIX="P1QCP2"
TXINTERVAL="0.008"
USERS="1 5 10 20 50"
TRIALS="1"
SIMTIME=20 #Default in wifi-example-sim.cc: The
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck=`which sqlite3`
if [ -z "$pCheck" ]
```

```
then
  echo "ERROR: This script requires sqlite3 (wifi−example
      −sim does not)."
  exit 255
fi

pCheck=`which gnuplot`
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi−example
      −sim does not)."
  exit 255
fi

pCheck=`which sed`
if [ −z "$pCheck" ]
then
  echo "ERROR: This script requires sed (wifi−example−sim
        does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/

if [ −e ../../P1QCP2.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" −o "$ANS" = "y" ]
  then
    echo Deleting database
    rm ../../P1QCP2.db
  fi
fi

for trial in $TRIALS
do
    for user in $USERS
    do
      echo Trial $trial, Users $user
      ../../waf −−run "WiFi −−users=$user −−dbPrefix=
          $DBPREFIX −−txInterval=$TXINTERVAL −−run=run−
          $trial−$DBPREFIX−$user"
    done
done

#
#Another SQL command which just collects raw numbers of
    frames receved.
#
```

```
#CMD="select Experiments.input,avg(Singletons.value) \
#     from Singletons,Experiments \
#     where Singletons.run = Experiments.run AND \
#           Singletons.name='wifi-rx-frames' \
#     group by Experiments.input \
#     order by abs(Experiments.input) ASC;"

mv ../../P1QCP2.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
     from Singletons rx, Singletons tx, Experiments exp, \
        Singletons delay \
     where rx.run = tx.run AND \
           rx.run = exp.run AND \
           delay.run = exp.run AND \
           rx.variable='receiver-rx-packets' AND \
           tx.variable='sender-tx-packets' AND \
           delay.variable='delay-average' \
     group by exp.input \
     order by abs(exp.input) ASC;"


sqlite3 -noheader P1QCP2.db "$CMD" > wifi-default.temp
sed -i "s/|/ /g" wifi-default.temp
awk '{print $1 " " $4*8*1000/20/1000/1000 > $1"usrTP.data
   "}' wifi-default.temp
awk '{print $1 " " $5/1000000 > $1"usrdelay.data"}' wifi-
   default.temp
awk '{print $1 " " ($3-$4)/$3*100 > $1"usrloss.data"}'
   wifi-default.temp

gnuplot wifi-p1qcp2.gnuplot

#Clean Directory
mv *.data *.db *.temp QC/P2/Data
mv *.png QC/P2/Images
echo "Done; data in wifi-default.data, plot in wifi-
   default.eps"
```

5.1.6 Question C Part 3 Bash Script

```
#!/bin/sh

DISTANCES="0 30 60 90 120 150"
DBPREFIX="P1QCP3"
TXINTERVAL="0.008"
USERS="1 5 10 15 20"
TRIALS="1"
SIMTIME=20 #Default in wifi-example-sim.cc: The
```

```sh
    transmission Time approximately equals to the
    Simulation Running Time

echo WiFi Experiment Example

pCheck=`which sqlite3`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sqlite3 (wifi-example
      -sim does not)."
  exit 255
fi

pCheck=`which gnuplot`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires gnuplot (wifi-example
      -sim does not)."
  exit 255
fi

pCheck=`which sed`
if [ -z "$pCheck" ]
then
  echo "ERROR: This script requires sed (wifi-example-sim
        does not)."
  exit 255
fi

export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:bin/

if [ -e ../../P1QCP3.db ]
then
  echo "Kill data.db? (y/n)"
  read ANS
  if [ "$ANS" = "yes" -o "$ANS" = "y" ]
  then
    echo Deleting database
    rm ../../P1QCP3.db
  fi
fi

for trial in $TRIALS
do
  for user in $USERS
  do
    for distance in $DISTANCES
    do
      echo Trial $trial, Users $user, distance $distance
        ../../waf --run "WiFi --distance=$distance --users=
```

```bash
            $user --dbPrefix=$DBPREFIX --txInterval=
            $TXINTERVAL --run=run-$trial-$DBPREFIX-$user-
            $distance"
      done
   done
done


#
#Another SQL command which just collects raw numbers of
    frames receved.
#
#CMD="select Experiments.input,avg(Singletons.value) \
#     from Singletons,Experiments \
#     where Singletons.run = Experiments.run AND \
#           Singletons.name='wifi-rx-frames' \
#     group by Experiments.input \
#     order by abs(Experiments.input) ASC;"

mv ../../P1QCP3.db .

CMD="select exp.input, tx.value, rx.value, delay.value \
     from Singletons rx, Singletons tx, Experiments exp,
         Singletons delay \
     where rx.run = tx.run AND \
           rx.run = exp.run AND \
           delay.run = exp.run AND \
           rx.variable='receiver-rx-packets' AND \
           tx.variable='sender-tx-packets' AND \
           delay.variable='delay-average' \
     group by exp.input \
     order by abs(exp.input) ASC;"




sqlite3 -noheader P1QCP3.db "$CMD" > wifi-default.temp
sed -i "s/|/ /g" wifi-default.temp
awk '{print $1 " " $5*8*1000/20/1000/1000 > $2"usrTP.data
   "}' wifi-default.temp
awk '{print $1 " " $6/1000000 > $2"usrdelay.data"}' wifi-
   default.temp
awk '{print $1 " " ($4-$5)/$4*100 > $2"usrloss.data"}'
   wifi-default.temp


gnuplot wifi-p1qcp3.gnuplot

#Clean Directory
mv *.data *.db *.temp QC/P3/Data
mv *.png QC/P3/Images
echo "Done; data in wifi-default.data, plot in wifi-
   default.eps"
```

5.2 C++ Files

The following script is a modified version of the provided code required to execute the simulation within ns-3.

5.2.1 C++ Simulation File

```
/* -*- Mode:C++; c-file-style:"gnu"; indent-tabs-mode:nil
   ; -*- */
/*
 * This program is free software; you can redistribute it
     and/or modify
 * it under the terms of the GNU General Public License
    version 2 as
 * published by the Free Software Foundation;
 *
 * This program is distributed in the hope that it will
    be useful,
 * but WITHOUT ANY WARRANTY; without even the implied
    warranty of
 * MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
    See the
 * GNU General Public License for more details.
 *
 * You should have received a copy of the GNU General
    Public License
 * along with this program; if not, write to the Free
    Software
 * Foundation, Inc., 59 Temple Place, Suite 330, Boston,
   MA 02111-1307 USA
 *
 * Authors: Joe Kopena <tjkopena@cs.drexel.edu>
 * Modified by: Longhao Zou, Oct 2016 for EE500 <longhao.
   zou@dcu.ie>
 *

           EE500 Assignment 2016-2017
           Default WiFi Network Topology

              WiFi 192.168.0.0
        ————————————————————
        |AP (node 0:192.168.0.1)|
        ————————————————————
           *         *              *
          /          |               \
  Traffic 1/  Traffic 2|    ————      \ Traffic N
        /            |              \
     user 1        user 2     ————    user N
    (node 1        (node 2    ————   (node N
    :192.168.0.2   :192.168.0.3 ————  :192.168.0.N+1
```

35
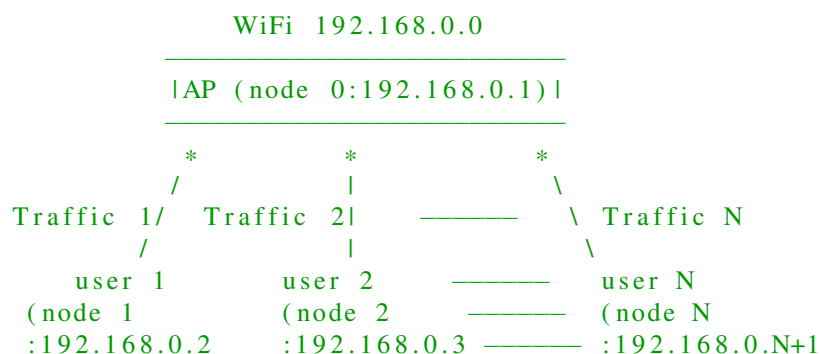
```cpp
                :1000)               :1001)              −−−−−:1000+(N−1))

   PS: In this example, I just implemented only 1 WiFi
       user.

 */

#include <ctime>

#include <sstream>

#include "ns3/core−module.h"
#include "ns3/network−module.h"
#include "ns3/mobility−module.h"
#include "ns3/wifi−module.h"
#include "ns3/internet−module.h"

#include "ns3/stats−module.h"

#include "wifi−example−apps.h"

using namespace ns3;
using namespace std;

NS_LOG_COMPONENT_DEFINE ("WiFiExampleSim");

void TxCallback (Ptr<CounterCalculator<uint32_t> > datac,
                  std::string path, Ptr<const Packet>
                    packet) {
  NS_LOG_INFO ("Sent frame counted in " <<
                datac−>GetKey ());
  datac−>Update ();
  // end TxCallback
}

// _____

//−− main
//_____
int main (int argc, char *argv[]) {
  // LogComponentEnable ("WiFiDistanceApps",
      LOG_LEVEL_INFO);
  double distance = 50.0;
  double distance2 = 100.0;
  double simTime = 20; // Simulation Running Time (in
      seconds)
  int users = 1;
  string txInterval = "0.05";
  string dbPrefix = "DBFile";
```

```cpp
string format ("db"); //Default as .db format (Please
    refer to sqlite-data-output.cc and sqlite-data-
    output.h located in /src/stats/model)

string experiment ("wifi-example-sim"); //the name of
    your experiment
string strategy ("wifi-default");
string input;
string runID;

{
  stringstream sstr;
  sstr << "run-" << time (NULL);
  runID = sstr.str ();
}

// Set up command line parameters used to control the
    experiment.
CommandLine cmd;
cmd.AddValue ("distance", "Distance apart to place
    nodes (in meters).",
                distance);
cmd.AddValue ("txInterval", "Interval between packet
    trasmissions (in seconds).", txInterval);
cmd.AddValue ("users", "Number of Users", users);
cmd.AddValue ("dbPrefix", "Database File Name",
    dbPrefix);
//cmd.AddValue ("format", "Format to use for data
    output.",
    //           format);
cmd.AddValue ("simTime", "Simulation Running Time (in
    seconds)", simTime);
cmd.AddValue ("experiment", "Identifier for experiment.
    ",
                experiment);
cmd.AddValue ("strategy", "Identifier for strategy.",
                strategy);
cmd.AddValue ("run", "Identifier for run.",
                runID);
cmd.Parse (argc, argv);

if (format != "omnet" && format != "db") {
    NS_LOG_ERROR ("Unknown output format '" << format
        << "'");
    return -1;
  }

#ifndef STATS_HAS_SQLITE3
if (format == "db") {
    NS_LOG_ERROR ("sqlite support not compiled in.");
```

```cpp
        return −1;
    }
#endif

{
  stringstream sstr ("");
  if(dbPrefix.compare("P1QAP2")==0){
      sstr << txInterval;
  } else if(dbPrefix.compare("P1QCP3")==0){
      sstr << distance;
      sstr << " " << users;
  } else if(dbPrefix.compare("P1QCP2")==0){
      sstr << users;
  } else{
      sstr << distance;
  }
  input = sstr.str ();
}

//
    _____


//-- Create nodes and network stacks
//_____
NS_LOG_INFO ("Creating nodes.");
NodeContainer nodes;
nodes.Create (users+1);

NS_LOG_INFO ("Installing WiFi and Internet stack.");
WifiHelper wifi = WifiHelper::Default ();
NqosWifiMacHelper wifiMac = NqosWifiMacHelper::Default
    ();
wifiMac.SetType ("ns3::AdhocWifiMac");
YansWifiPhyHelper wifiPhy = YansWifiPhyHelper::Default
    ();
YansWifiChannelHelper wifiChannel =
    YansWifiChannelHelper::Default ();
wifiPhy.SetChannel (wifiChannel.Create ());
NetDeviceContainer nodeDevices = wifi.Install (wifiPhy,
     wifiMac, nodes);

InternetStackHelper internet;
internet.Install (nodes);
Ipv4AddressHelper ipAddrs;
ipAddrs.SetBase ("192.168.0.0", "255.255.255.0");
ipAddrs.Assign (nodeDevices);

//
    _____
```

38

```
//—— Setup physical layout
//————————————————————————————
NS_LOG_INFO ("Installing static mobility; distance " <<
    distance << " .");
MobilityHelper mobility;
Ptr<ListPositionAllocator> positionAlloc =
  CreateObject<ListPositionAllocator>();
positionAlloc ->Add (Vector (0.0, 0.0, 0.0));
if(dbPrefix.compare("P1QCP1")!=0){
  for(int i=0; i<users; i++){
    positionAlloc ->Add (Vector (0.0, distance, 0.0));
  }
} else {
  positionAlloc ->Add (Vector (0.0, distance, 0.0));
  positionAlloc ->Add (Vector (0.0, distance2, 0.0));
}
mobility.SetPositionAllocator (positionAlloc);
mobility.Install (nodes);


//
  ————————————————————————————————————


//—— Create the traffic between AP and WiFi Users
//
  ————————————————————————————————————


//
  ————————————————————————————————————


//—— 1. Create the first traffic for the first WiFi
    user on WiFi AP (source)
//————————————————————————————
NS_LOG_INFO ("Create traffic source & sink.");
Ptr<Sender> sender[users];
Ptr<Node> appSource = NodeList::GetNode (0);
for(int i=0; i<users; i++){
  sender[i] = CreateObject<Sender>();
  sender[i]->SetAttribute("Port", UintegerValue(1000+i)
      );//Lisening Port of the first WiFi user
  sender[i]->SetAttribute("PacketSize", UintegerValue
      (1000)); //bytes
  sender[i]->SetAttribute("Interval", StringValue ("ns3
      ::ConstantRandomVariable[Constant=" + txInterval +
       "]")); //seconds
  sender[i]->SetAttribute("NumPackets",UintegerValue
      (100000000));
  appSource ->AddApplication (sender[i]);
  sender[i]->SetStartTime (Seconds (0));
}
```

```
//_____

//-- 2. Create the first WiFi User (sink)
//---------------------------------------------
Ptr<Receiver> receiver[users];
for(int i=0; i<users; i++){
  Ptr<Node> appSink = NodeList::GetNode (i+1);
  receiver[i] = CreateObject<Receiver>();
  receiver[i]->SetAttribute("Port", UintegerValue(1000+
      i)); //Lisening Port
  appSink->AddApplication (receiver[i]);
  receiver[i]->SetStartTime (Seconds (0));

  //Set IP address of the first User to AP (source)
  string ipString = "192.168.0."+std::to_string(i+2);
  const char* ip = ipString.c_str();
  //cout << ip;
  Config::Set ("/NodeList/*/ApplicationList/"+std::
      to_string(i)+"/$Sender/Destination",
            Ipv4AddressValue (ip));
}

//_____


//-- Setup stats and data collection
//--   for the WiFi AP and the first WiFi User
//---------------------------------------------

// Create a DataCollector object to hold information
    about this run.
DataCollector dataofuser[users];
for(int i=0; i<users; i++){
  dataofuser[i].DescribeRun (experiment,
                  strategy,
                  input+" user"+std::to_string(i+1),
                  runID);

  // Add any information we wish to record about this
      run.
  dataofuser[i].AddMetadata ("author", "EE500-Michael")
      ; //Please replace XXX with your first name!
}
// Create a counter to track how many frames are
    generated.  Updates
// are triggered by the trace signal generated by the
    WiFi MAC model
// object.  Here we connect the counter to the signal
    via the simple
```

40

```
// TxCallback() glue function defined above.
Ptr<CounterCalculator<uint32_t> > totalTx[users];
Ptr<PacketCounterCalculator> totalRx[users];
Ptr<PacketCounterCalculator> appTx[users];
Ptr<CounterCalculator<> > appRx[users];
Ptr<PacketSizeMinMaxAvgTotalCalculator> appTxPkts[users
    ];
Ptr<TimeMinMaxAvgTotalCalculator> delayStat[users];
for(int i=0; i<users; i++){
  totalTx[i] = CreateObject<CounterCalculator<uint32_t>
      >();
  totalRx[i] = CreateObject<PacketCounterCalculator>();
  appTx[i] = CreateObject<PacketCounterCalculator>();
  appRx[i] = CreateObject<CounterCalculator<> >();
  appTxPkts[i] = CreateObject<
      PacketSizeMinMaxAvgTotalCalculator>();
  delayStat[i] = CreateObject<
      TimeMinMaxAvgTotalCalculator>();


  totalTx[i]->SetKey ("wifi-tx-frames");
  totalTx[i]->SetContext ("node[0]");
  Config::Connect ("/NodeList/0/DeviceList/*/$ns3::
      WifiNetDevice/Mac/MacTx",
                    MakeBoundCallback (&TxCallback,
                        totalTx[i]));
  dataofuser[i].AddDataCalculator (totalTx[i]);

// This is similar, but creates a counter to track how
   many frames
// are received.  Instead of our own glue function,
   this uses a
// method of an adapter class to connect a counter
   directly to the
// trace signal generated by the WiFi MAC.
  totalRx[i]->SetKey ("wifi-rx-frames");
  totalRx[i]->SetContext ("node["+std::to_string(i+1)+"
      ]");
  Config::Connect ("/NodeList/"+std::to_string(i+1)+"/
      DeviceList/*/$ns3::WifiNetDevice/Mac/MacRx",
                    MakeCallback (&
                        PacketCounterCalculator::
                        PacketUpdate,
                            totalRx[i]));
  dataofuser[i].AddDataCalculator (totalRx[i]);

// This counter tracks how many packets——as opposed to
    frames——are
// generated.  This is connected directly to a trace
   signal provided
```

```
// by our Sender class.
  appTx[i]->SetKey ("sender-tx-packets");
  appTx[i]->SetContext ("node[0]");
  Config::Connect ("/NodeList/0/ApplicationList/"+std::
      to_string(i)+"/$Sender/Tx",
                        MakeCallback (&
                            PacketCounterCalculator::
                            PacketUpdate,
                                    appTx[i]));
  dataofuser[i].AddDataCalculator (appTx[i]);

// Here a counter for received packets is directly
    manipulated by
// one of the custom objects in our simulation, the
    Receiver
// Application.  The Receiver object is given a pointer
     to the
// counter and calls its Update() method whenever a
    packet arrives.
  appRx[i]->SetKey ("receiver-rx-packets");
  appRx[i]->SetContext ("node["+std::to_string(i+1)+"]"
      );
  receiver[i]->SetCounter (appRx[i]);
  dataofuser[i].AddDataCalculator (appRx[i]);

/**
 * Just to show this is here...
 Ptr<MinMaxAvgTotalCalculator<uint32_t> > test =
 CreateObject<MinMaxAvgTotalCalculator<uint32_t> >();
 test->SetKey("test-dc");
 data.AddDataCalculator(test);

 test->Update(4);
 test->Update(8);
 test->Update(24);
 test->Update(12);
**/

// This DataCalculator connects directly to the
    transmit trace
// provided by our Sender Application.  It records some
     basic
// statistics about the sizes of the packets received (
    min, max,
// avg, total # bytes), although in this scenaro they'
    re fixed.
  appTxPkts[i]->SetKey ("tx-pkt-size");
  appTxPkts[i]->SetContext ("node[0]");
  Config::Connect ("/NodeList/0/ApplicationList/"+std::
      to_string(i)+"/$Sender/Tx",
```

```
                    MakeCallback
                        (&
                            PacketSizeMinMaxAvgTotalCalculator
                            :: PacketUpdate ,
                        appTxPkts [ i ] ) ) ;
    dataofuser [ i ] . AddDataCalculator ( appTxPkts [ i ] ) ;

// Here we directly manipulate another DataCollector
    tracking min ,
// max, total , and average propagation delays .  Check
    out the Sender
// and Receiver classes to see how packets are tagged
    with
// timestamps to do this .
    delayStat [ i]−>SetKey ( "delay" ) ;
    delayStat [ i]−>SetContext ( " . " ) ;
    receiver [ i]−>SetDelayTracker ( delayStat [ i ] ) ; //
        nanoseconds
    dataofuser [ i ] . AddDataCalculator ( delayStat [ i ] ) ;
}

//
    _____


//−− Run the simulation
//−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−
NS_LOG_INFO ( "Run Simulation . " ) ;
Simulator :: Stop ( Seconds ( simTime ) ) ;
Simulator :: Run  ( ) ;


//
    _____


//−− Generate statistics output .
//−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−−

// Pick an output writer based in the requested format .
Ptr<DataOutputInterface > output = 0;
if ( format == "omnet" ) {
    NS_LOG_INFO ( "Creating omnet formatted data output .
        " ) ;
    output = CreateObject <OmnetDataOutput >() ;
  } else if ( format == "db" ) {
  #ifdef STATS_HAS_SQLITE3
    NS_LOG_INFO ( "Creating sqlite formatted data output
        . " ) ;
    output = CreateObject <SqliteDataOutput >() ;
  #endif
  } else {
    NS_LOG_ERROR ( "Unknown output format " << format ) ;
```

```
  }
  // Finally, have that writer interrogate the
     DataCollector and save
  // the results.
  if (output != 0)
  {
    output->SetFilePrefix(dbPrefix);
    for(int i=0; i<users; i++){
      output->Output (dataofuser[i]);
    }
  }
  // Free any memory here at the end of this example.

  Simulator::Destroy ();

  // end main
}
```

5.3   Gnuplot Files

The following scripts are used to plot the values extracted from the .db files output from the simulations.

5.3.1   Question A Part 1 Bash Script

```
set terminal png   enhanced lw 2 font Helvetica 14

set size 1.0, 0.66

#————————————————————————————————
set out "wifi-throughput.png"
set title "Average Throughput Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Throuhput [Mbps]"
set yrange [0:1]

plot "throughput.data" with lines title "WiFi Throughput
    vs. Distance"

#————————————————————————————————
set out "wifi-delay.png"
set title "Average Delay Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Delay [ms]"
set yrange [0:1]
```

```
plot "delay.data" with lines title "WiFi Delay vs.
    Distance"

#————————————————————————————————————
set out "wifi-loss.png"
set title "Average Loss Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:1]

plot "loss.data" with lines title "WiFi PLR vs. Distance"
```

5.3.2 Question A Part 2 Bash Script

```
set terminal png  enhanced lw 2 font Helvetica 14

set size 1.0, 0.66

#————————————————————————————————————
set out "wifi-throughput.png"
set title "Average Throughput Over Transmission Interval"
set xlabel "Transmission Interval (s)"
set xrange [0:0.01]
set ylabel "Throuhput [Mbps]"
set yrange [0:20]

plot "throughput.data" with lines title "WiFi Throughput
    vs. txInterval"

#————————————————————————————————————
set out "wifi-delay.png"
set title "Average Delay Over Transmission Interval"
set xlabel "Transmission Interval (s)"
set xrange [0:0.01]
set ylabel "Delay [ms]"
set yrange [0:300]

plot "delay.data" with lines title "WiFi Delay vs.
    txInterval"

#————————————————————————————————————
set out "wifi-loss.png"
set title "Average Loss Over Transmission Interval"
set xlabel "Transmission Interval (s)"
set xrange [0:0.01]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:40]

plot "loss.data" with lines title "WiFi PLR vs.
```

```
    txInterval"
```

5.3.3 Question B Bash Script

```
set terminal png  enhanced lw 2 font Helvetica 14

set size 1.0, 0.66

#————————————————————————————————
set out "wifi−throughput.png"
set title "Average Throughput Over Distance"
set xlabel "Distance (m)"
set xrange [0:140]
set ylabel "Throuhput [Mbps]"
set yrange [0:0.2]

plot "throughput.data" with lines title "WiFi Throughput
    vs. Distance"

#————————————————————————————————
set out "wifi−delay.png"
set title "Average Delay Over Distance"
set xlabel "Distance (m)"
set xrange [0:140]
set ylabel "Delay [ms]"
set yrange [0:10]

plot "delay.data" with lines title "WiFi Delay vs.
    Distance"

#————————————————————————————————
set out "wifi−loss.png"
set title "Average Loss Over Distance"
set xlabel "Distance (m)"
set xrange [0:140]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:100]

plot "loss.data" with lines title "WiFi PLR vs. Distance"
```

5.3.4 Question C Part 1 Bash Script

```
set terminal png  enhanced lw 2 font Helvetica 14

set size 1.0, 0.66

#————————————————————————————————
set out "wifi−throughput.png"
set title "Average Throughput Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
```

```
set ylabel "Throuhput [Mbps]"
set yrange [0:4]

plot "usr1TP.data" with lines title "User 1", \
     "usr2TP.data" with lines title "User 2"
#————————————————————————————————
set out "wifi-delay.png"
set title "Average Delay Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Delay [ms]"
set yrange [0:4]

plot "usr1delay.data" with lines title "User 1", \
     "usr2delay.data" with lines title "User 2"

#————————————————————————————————
set out "wifi-loss.png"
set title "Average Loss Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:1]

plot "usr1loss.data" with lines title "User 1", \
     "usr2loss.data" with lines title "User 2"
```

5.3.5 Question C Part 2 Bash Script

```
set terminal png  enhanced lw 2 font Helvetica 14

set size 1.0, 0.66

#————————————————————————————————
set out "wifi-throughput.png"
set title "Average Throughput vs No. of Users"
set xlabel "Users"
set xrange [0:60]
set ylabel "Throuhput [Mbps]"
set yrange [0:2]

plot "1usrTP.data" with lines title "1 User", \
     "5usrTP.data" with lines title "5 Users", \
     "10usrTP.data" with lines title "10 Users", \
     "20usrTP.data" with lines title "20 Users", \
     "50usrTP.data" with lines title "50 Users"
#————————————————————————————————
set out "wifi-delay.png"
set title "Average Delay vs No. of Users"
set xlabel "Users"
```

```
set xrange [0:60]
set ylabel "Delay [ms]"
set yrange [0:2000]

plot "1usrdelay.data" with lines title "1 User", \
     "5usrdelay.data" with lines title "5 Users", \
     "10usrdelay.data" with lines title "10 Users", \
     "20usrdelay.data" with lines title "20 Users", \
     "50usrdelay.data" with lines title "50 Users"

#————————————————————————————————————————
set out "wifi−loss.png"
set title "Average vs No. of Users"
set xlabel "Users"
set xrange [0:60]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:5]

plot "1usrloss.data" with lines title "1 User", \
     "5usrloss.data" with lines title "5 Users", \
     "10usrloss.data" with lines title "10 Users", \
     "20usrloss.data" with lines title "20 Users", \
     "50usrloss.data" with lines title "50 Users"
```

5.3.6   Question C Part 3 Bash Script

```
set terminal png   enhanced lw 2 font Helvetica 14

set size  1.0,  0.66

#————————————————————————————————————————
set out "wifi−throughput.png"
set title "Average Throughput Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Throuhput [Mbps]"
set yrange [0:2]

plot "1usrTP.data" with lines title "1 User", \
     "5usrTP.data" with lines title "5 Users", \
     "10usrTP.data" with lines title "10 Users", \
     "15usrTP.data" with lines title "15 Users", \
     "20usrTP.data" with lines title "20 Users"

#————————————————————————————————————————
set out "wifi−delay.png"
set title "Average Delay Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Delay [ms]"
```

```
set yrange [0:520]

plot "1usrdelay.data" with lines title "1 User", \
     "5usrdelay.data" with lines title "5 Users", \
     "10usrdelay.data" with lines title "10 Users", \
     "15usrdelay.data" with lines title "15 Users", \
     "20usrdelay.data" with lines title "20 Users"

#————————————————————————————————————————————————
set out "wifi-loss.png"
set title "Average Loss Over Distance"
set xlabel "Distance (m)"
set xrange [0:210]
set ylabel "Packet Loss Ratio [%]"
set yrange [0:100]

plot "1usrloss.data" with lines title "1 User", \
     "5usrloss.data" with lines title "5 Users", \
     "10usrloss.data" with lines title "10 Users", \
     "15usrloss.data" with lines title "15 Users", \
     "20usrloss.data" with lines title "20 Users"
```