

Native aircraft: equal 6000-update loss ablation

Post-hoc negative examples chosen after artifact discovery; labeled review, not a blind/random sample
Same SwinIR classical x4, real data, seed, optimizer and 6000-update budget; complete field in every cell

Native input 20 x 20
nearest-neighbour display

Official initial SwinIR
learned 80 -> 400 display

Perceptual schedule | step 6000
4000 reconstruction + 2000 LPIPS

Reconstruction only | step 6000
L1 + 0.05 edge throughout

Native ID
24018





Native ID
24259



Native ID
24900



Native ID
28200

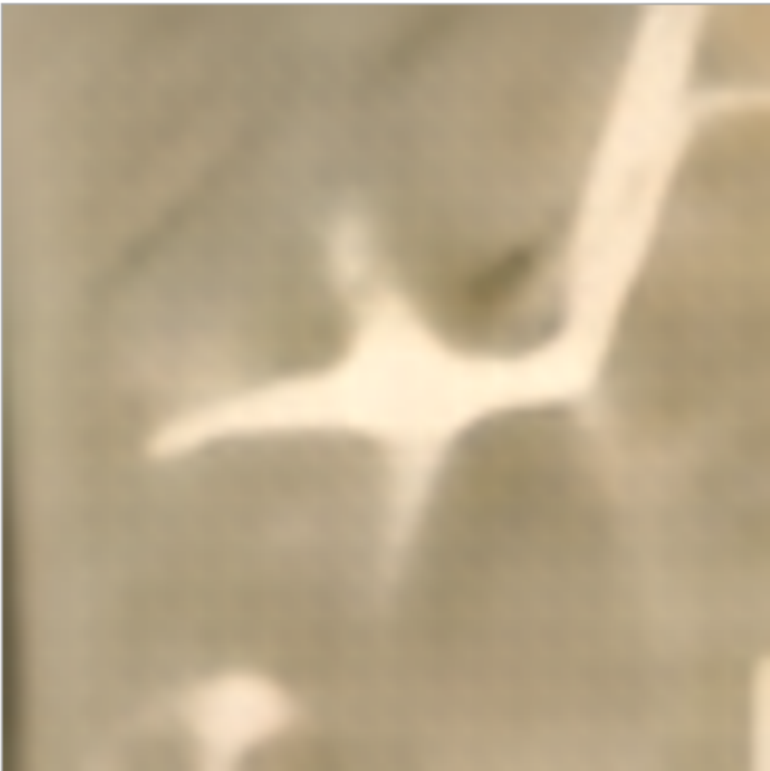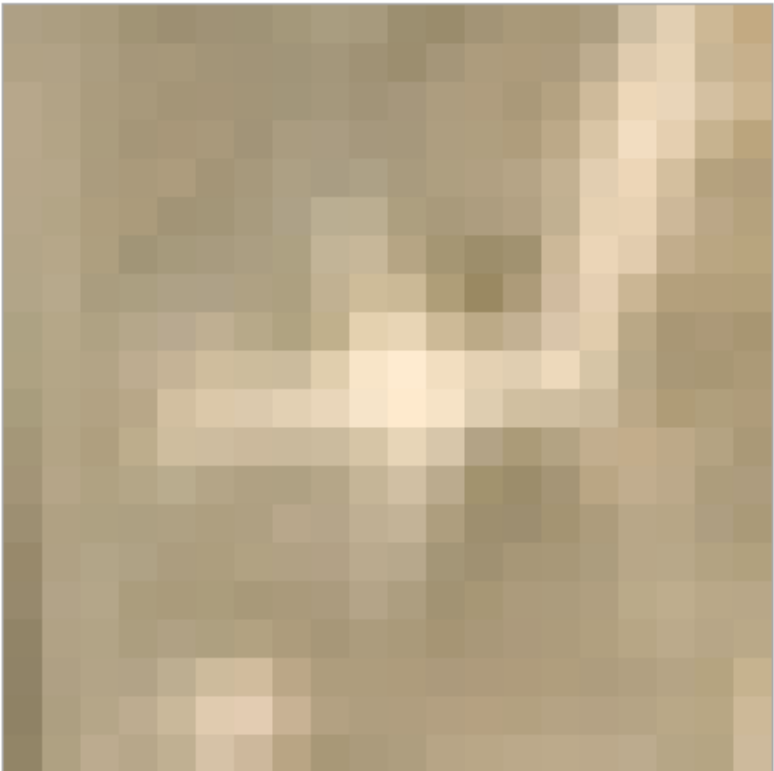

Every model cell is a bicubic 400-pixel display of a learned 80-pixel output. There is no native high-resolution ground truth.
Assess visible artifact differences only; smoother texture is not proof of recovered true detail or complete removal of artifacts.
The reconstruction column uses actual step 6000, not the separately selected best-fidelity step 5500. No crop, sharpening or contrast change.