




Current limiters for the rows

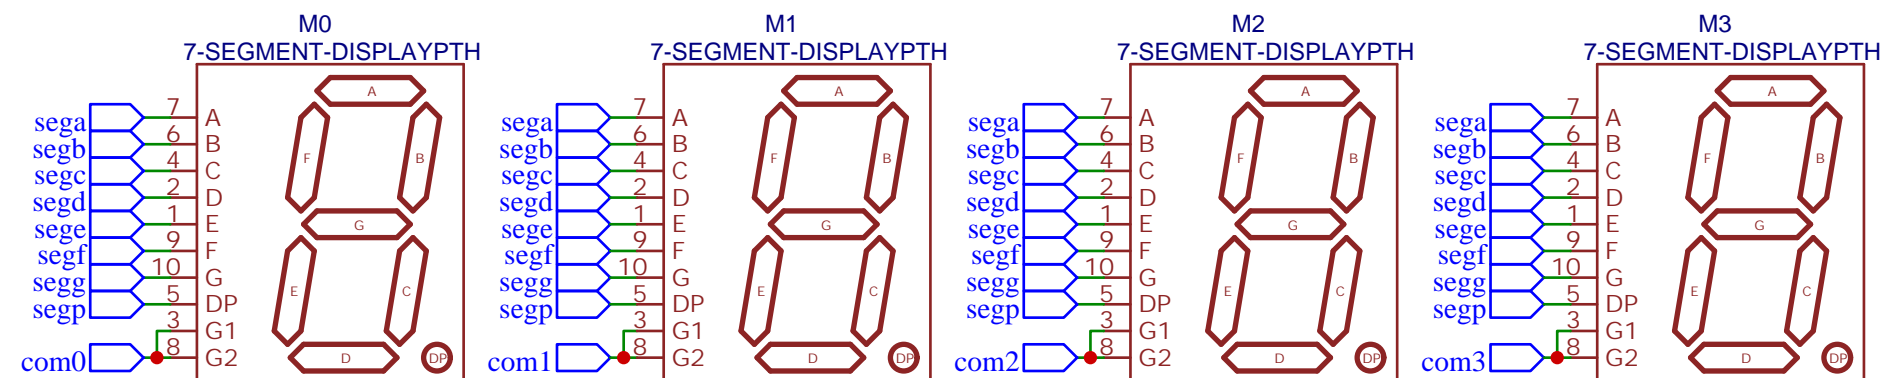

Four 7-segment displays in row/column layout

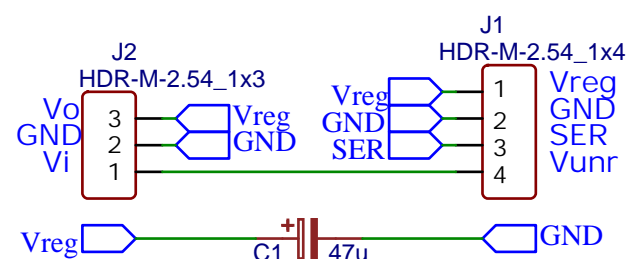


Power and input

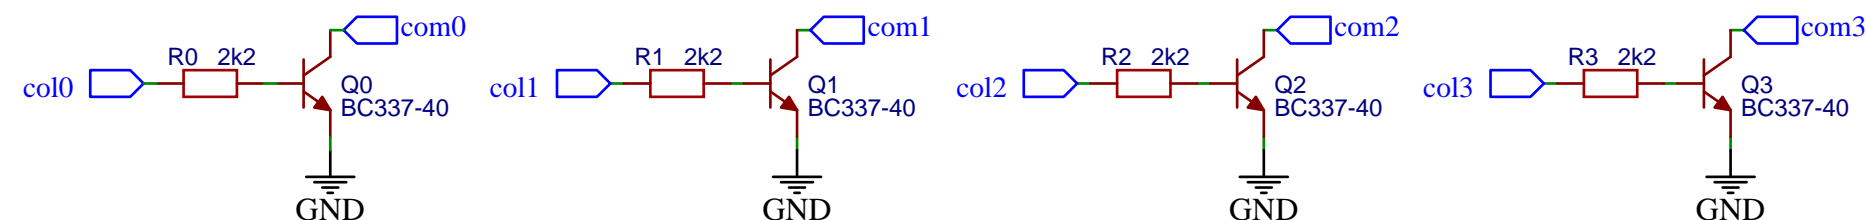

Column drivers

- (1) Host has regulated power in the range of 3-6V: connect Vreg/GND/SER of J1.
- (2) Otherwise mount buck or boost regulator on J2 and connect Vunr/GND/SER of J1.

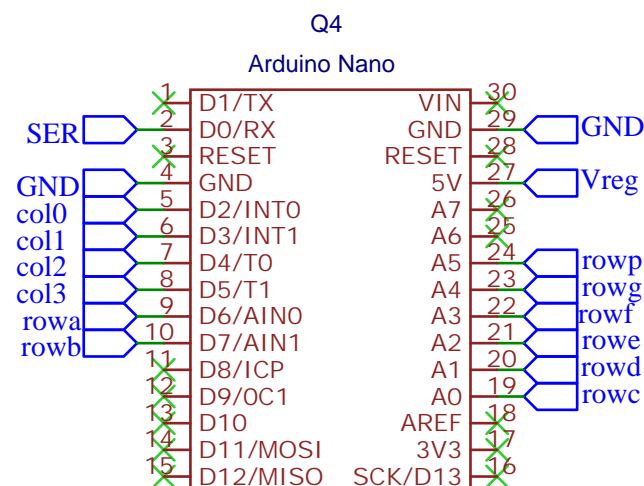

Controller

TITLE: Seven Segment over Serial (SSoS)		REV: 1.0a
EasyEDA	Company: Hobby	Sheet: 1/1
	Date: 2022-01-05	Drawn By: Maarten Pennings