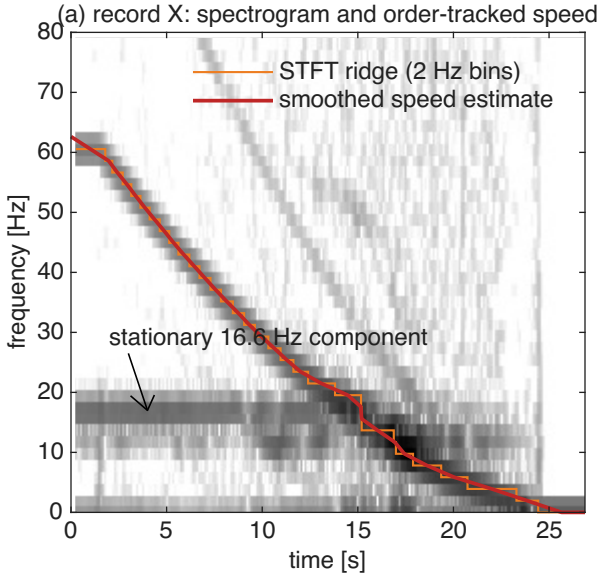
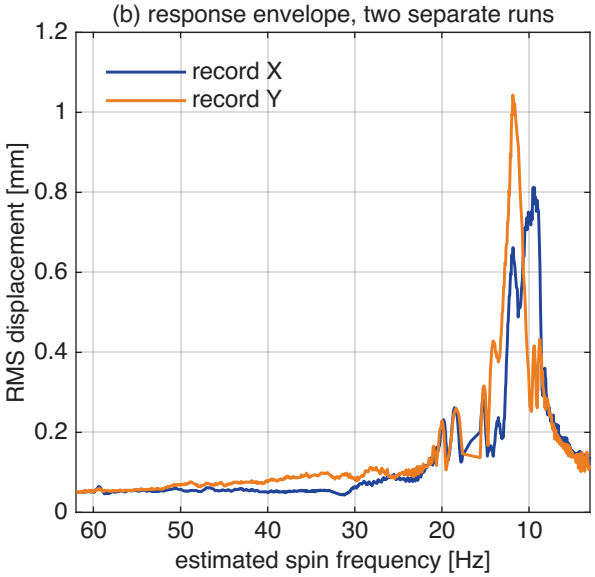

(a) record X: spectrogram and order-tracked speed
STFT ridge (2 Hz bins)
smoothed speed estimate
stationary 16.6 Hz component
frequency [Hz]
time [s]
0
10
20
30
40
50
60
70
80
0
5
10
15
20
25


(b) response envelope, two separate runs
record X
record Y
RMS displacement [mm]
estimated spin frequency [Hz]
0
0.2
0.4
0.6
0.8
1
1.2
60
50
40
30
20
10