



REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	20/07/02	AW	WK

材质说明(Note):








1. 塑胶主体 : LCP 加玻纤30%,防火等级 UL94V-0, 颜色: 黑色.
(HOUSING: LCP WITH 30% GF, UL 94V-0, COLOR: Black.)
2. 端子: 磷铜 ,T=0.25.
(CONTACTS: PHOSPHOR BRONZE; 0.25 THICKNESS.)
3. 固定片 : 黄铜, T=0.30.
(Latch :BRASS.)

机械特性(MECHANICAL PROPERTY):

1. 插拔寿命: 1500次.
UNMATING AND MATING LIFE : 1500 CYCLES .

电气特性(ELECTRIC PROPERTY):


1. 额定电压: 250V AC.
(Voltage: 250 volts AC)
2. 额定电流: 1AMP .
(Current: 1.0 amperes.)
3. 接触阻抗 : 30 mΩ .
(Low level contact resistance: 30 mΩ)
4. 绝缘阻抗 : 1000 MΩ, 500V DV.
(Insulation resistance:1000 MΩ, 500V DV)
5. 耐电压 : 500V 1Minute .
(Dielectric withstanding voltage:500V 1Minute)

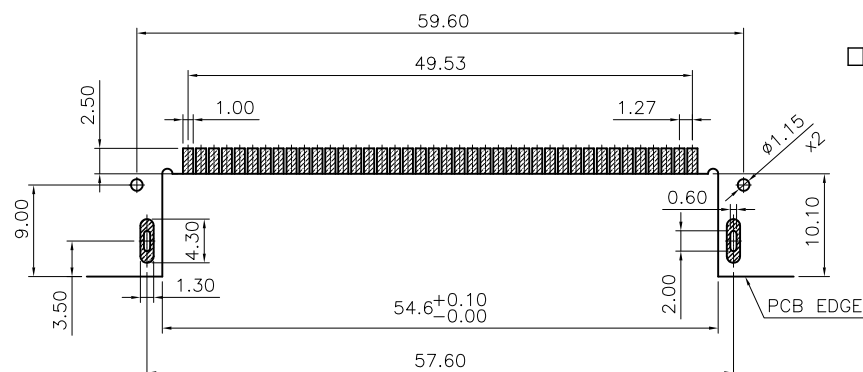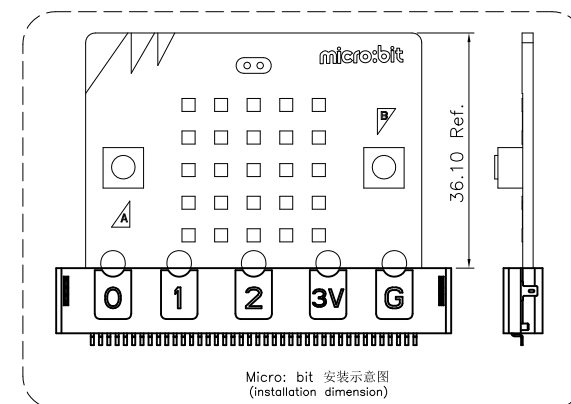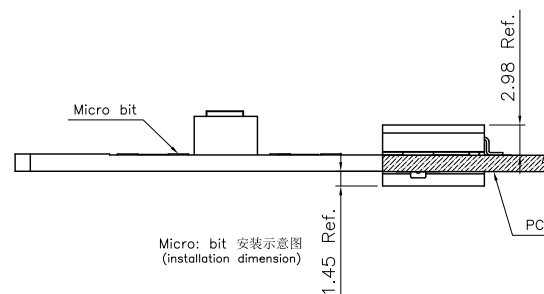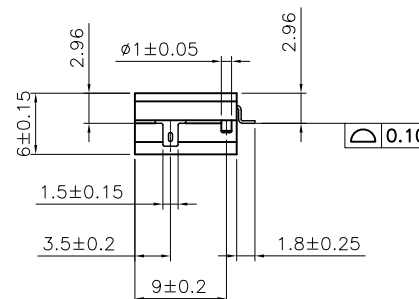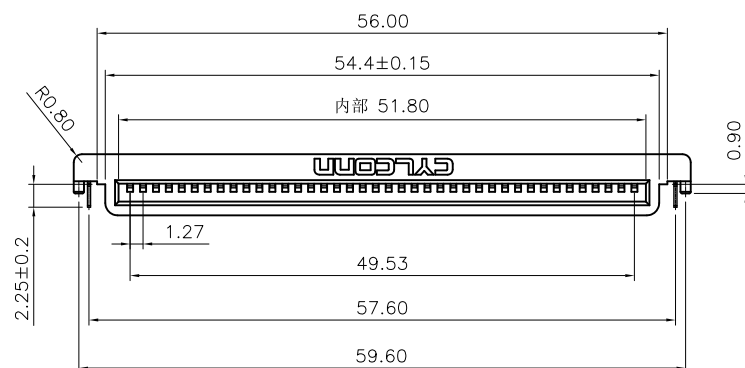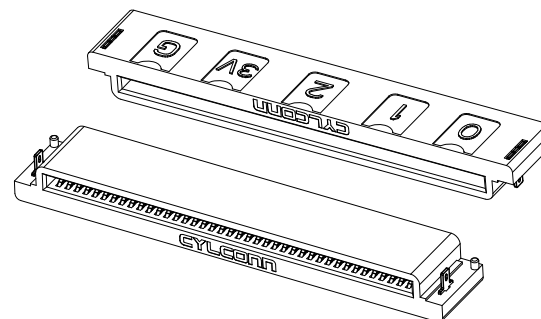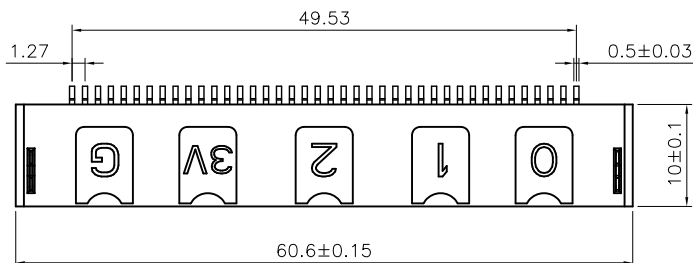

TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



THIRD ANGLE PROJECTION

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.30
2 PLC	± 0.20
3 PLC	± 0.15
4 PLC	± -

ANGLES ± 3°

DWN 2020/07/02

A. WU

CHEK 2020/07/02

S. CHIEN

APVD 2020/07/02

Abel

PRODUCT SPEC

—

WEIGHT

—

CUSTOMER DRAWING

MIC127-140-D01

成品料号 (Part number)

Micro Bit-connector_40p 90度 沉板 SMT Au3u" LCP 黑色

品名规格 (Part name)

东莞市宇亮电子有限公司

DONG GUAN YU LIANG ELECTRONICS CO., LTD

NAME

Micro Bit-connector_40p 90度 沉板 SMT Au3u"
LCP 黑色

SIZE

A4

DRAWING No.

YL-ED-OXXXX

SCALE 1 : 1

SHEET 1 OF 1