

5

4









3

2

1



XX

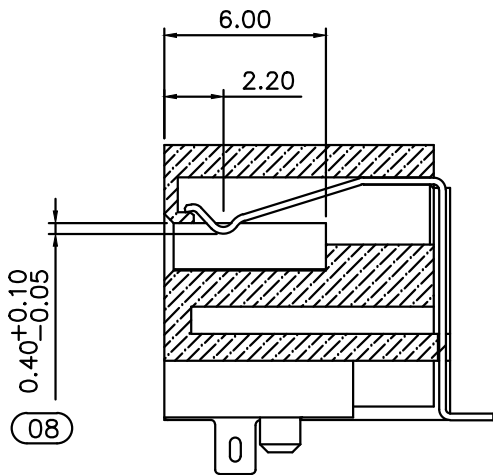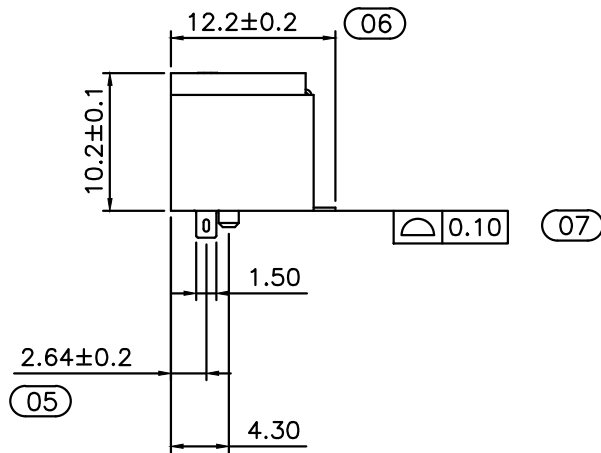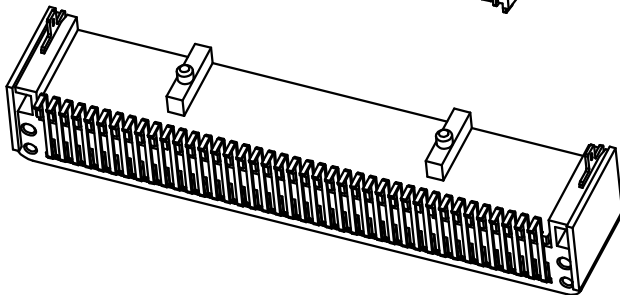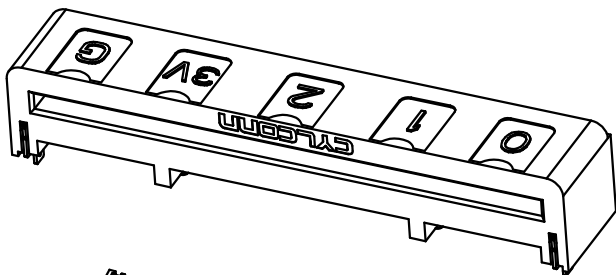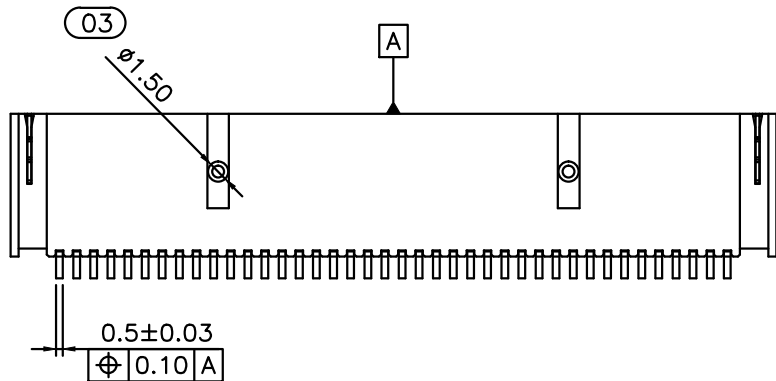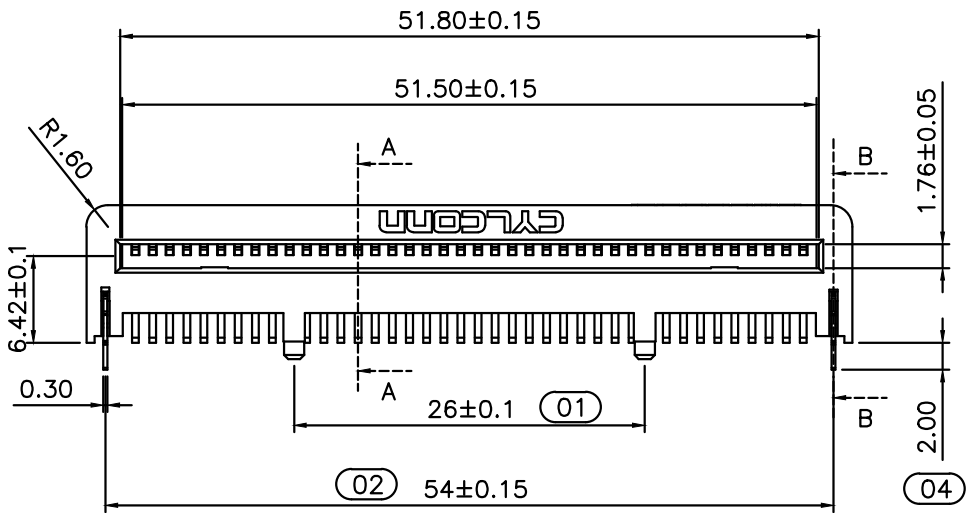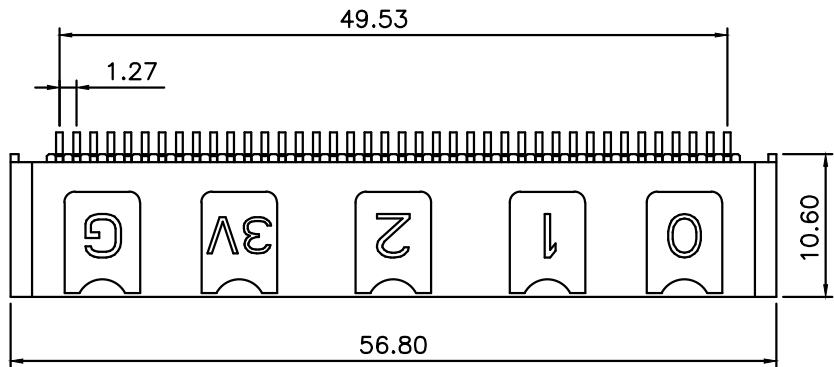

A-A
2: 1

MATERIAL:
1. HOUSING: HIGH TEMPERATURE RESISTANT NYLON RESIN WITH 30% GLASS FIBER
2. CONTACTS: PHOSPHOR COPPER, T=0.25
3. BOARD LOCK: COPPER ALLOY, T=0.30
PLATING:
1. CONTACTS: 3U" MIN AU AT MATING AREA, 80U" MIN TIN AT SOLDER AREA, 50U" MIN NICKEL PLATED ALL OVER
2. BOARD LOCK: 80U" MIN TIN OVER 50U" NICKEL UNDERPLATED

ENVIRONMENTAL:
1. ROHS Compliant.

MECHANICAL PERFORMANCE:
1. PLUGGING FORCE (BETWEEN MICRO BIT & CONNECTOR): 1KG
2. PRODUCT LIFE: 1500 MATING CYCLES .

ELECTRICAL PERFORMANCE:
1. RATED VOLTAGE: 250V AC
2. RATED CURRENT: 1AMP
3. LLCR: 30MΩ
4. INSULATION RESISTANCE: 1000MΩ 500V DV
5. VOLTAGE WITHSTAND: 500V 1MINUTE.

A	RELEASED	2020/08/18		
LTR	DESCRIPTION	DATE	DWN	APVD
REVISIONS				

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 0.20
	1 PLC ± 0.15
	2 PLC ± 0.10
	3 PLC ± 0.05
	4 PLC ± -
THIRD ANGLE PROJECTION	
ANGLES ± 3°	

MIC127-140-E04	Micro Bit-connector_40p 90 LOGO SMT Au3u" PA9T		
MIC127-140-E03	Micro Bit-connector_40p 90 LOGO SMT Au3u" PA9T		
MIC127-140-E02	Micro Bit-connector_40p 90 LOGO SMT Au3u" PA9T		
MIC127-140-E01	Micro Bit-connector_40p 90 LOGO SMT Au3u" LCP		
DWN 	2020/08/18	DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
CHEK	2020/08/18		
APVD	2020/08/18		
PRODUCT SPEC		NAME	
—		Micro Bit-connector_40p LOGO 90 SMT	
WEIGHT		SIZE	DRAWING No.
—		A4	 = YL-ED-01954
ASSMBLE DRAWING			SCALE 1 : 1
			SHEET 1 OF 1