



LINEAR LI-ION/LI-PO BATTERY CHARGER (500mA)

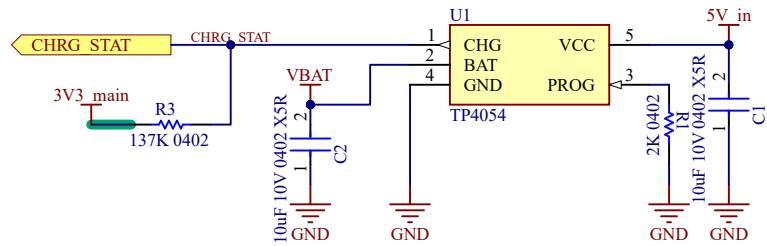


Status of charging indicator with	CHRG
Normal state of	Everbr ight
Battery full state	Extinguish
Battery reverse connection, power supply under voltage	Extinguish
No battery power on	twinkle


CHARGING INPUT




BATTERY INPUT

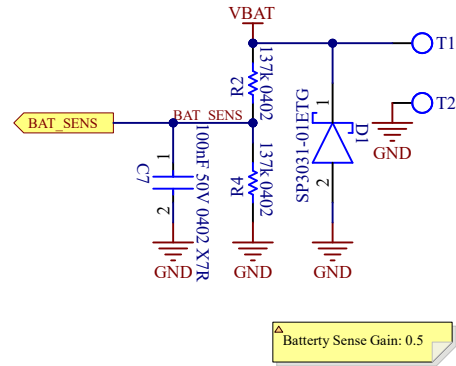


3V3 3A SYNCHRONOUS BUCK BOOST CONVERTER

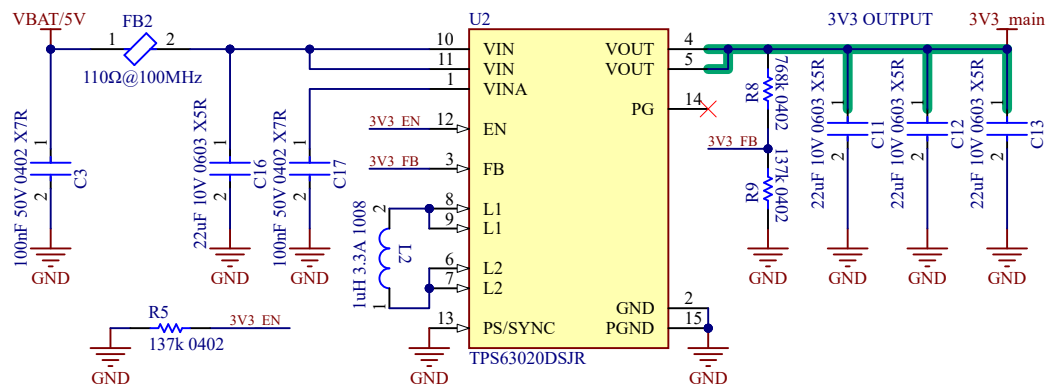


POWER SWITCHING

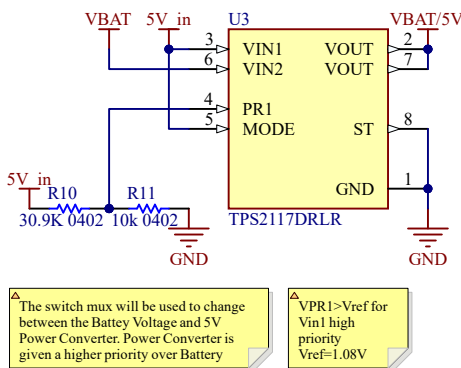


DIODE MUX (POWER ON)

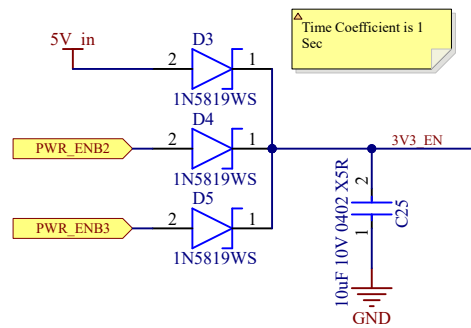

RS485 TRANSCEIVER

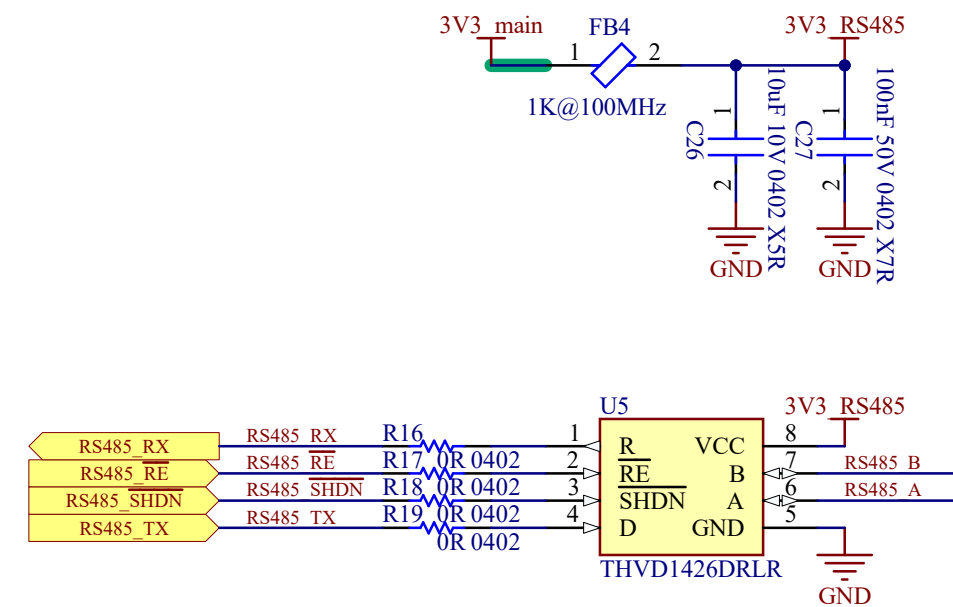


INPUT OUTPUT CONNECTORS

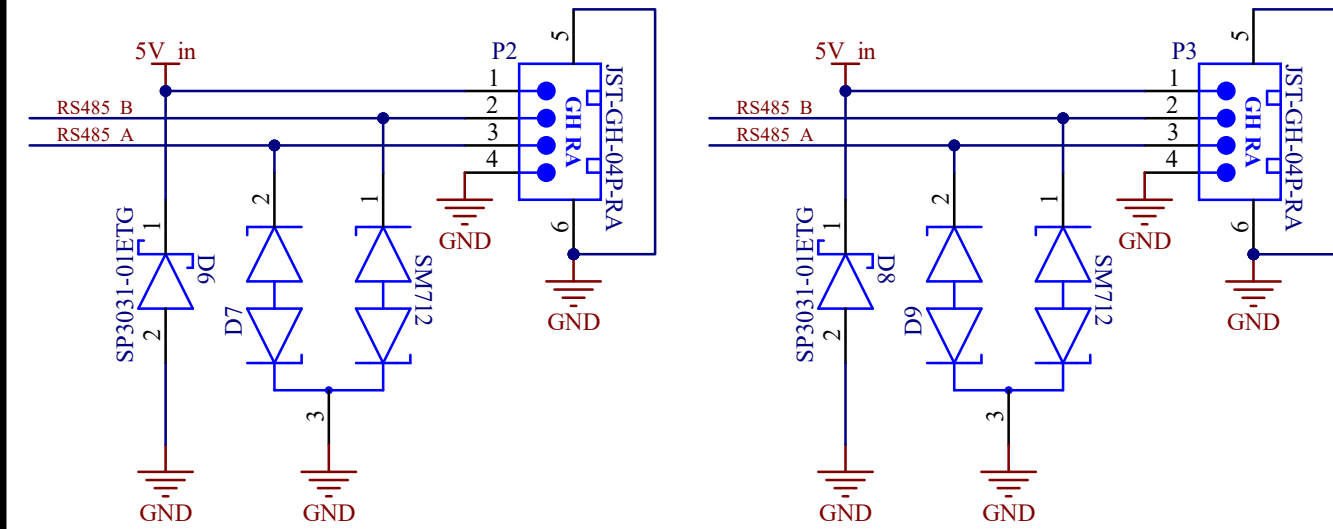


Title:		Number:
RS485 Com and Connectors.SchDoc		4
Project:		Version:
ExoSkeleton Node PCB V1.0.PrjPcb		V1.0


BNO085 IMU SENSOR

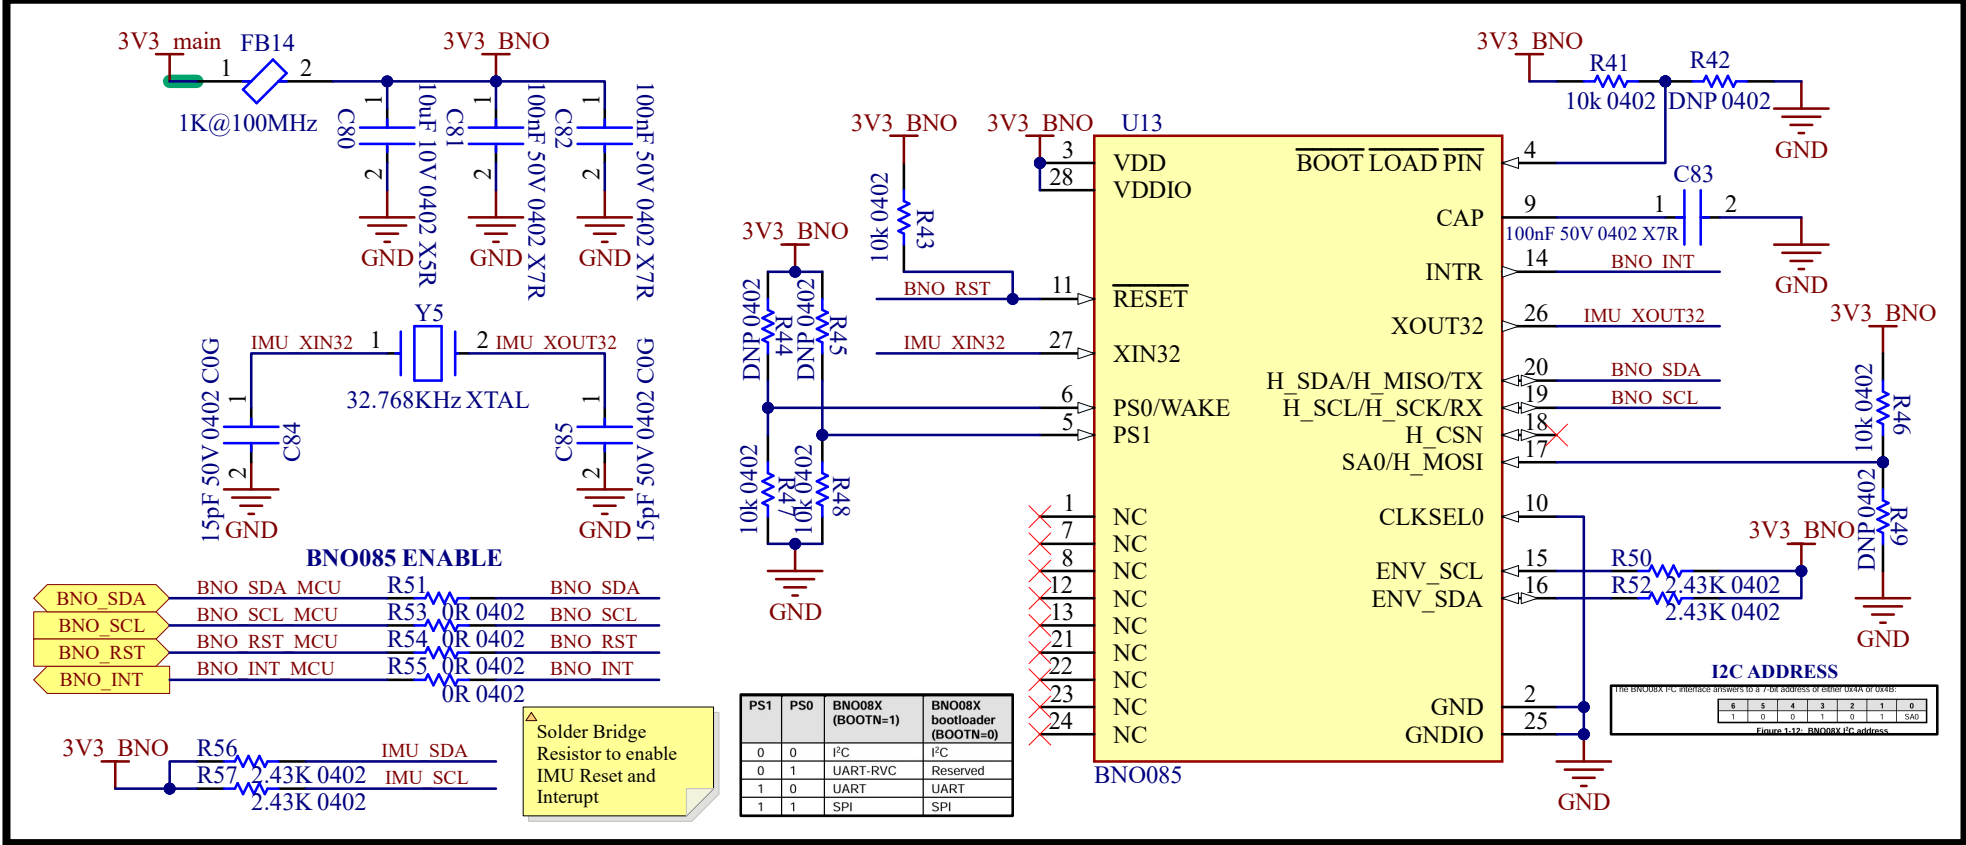


ICM-45686 IMU SENSOR

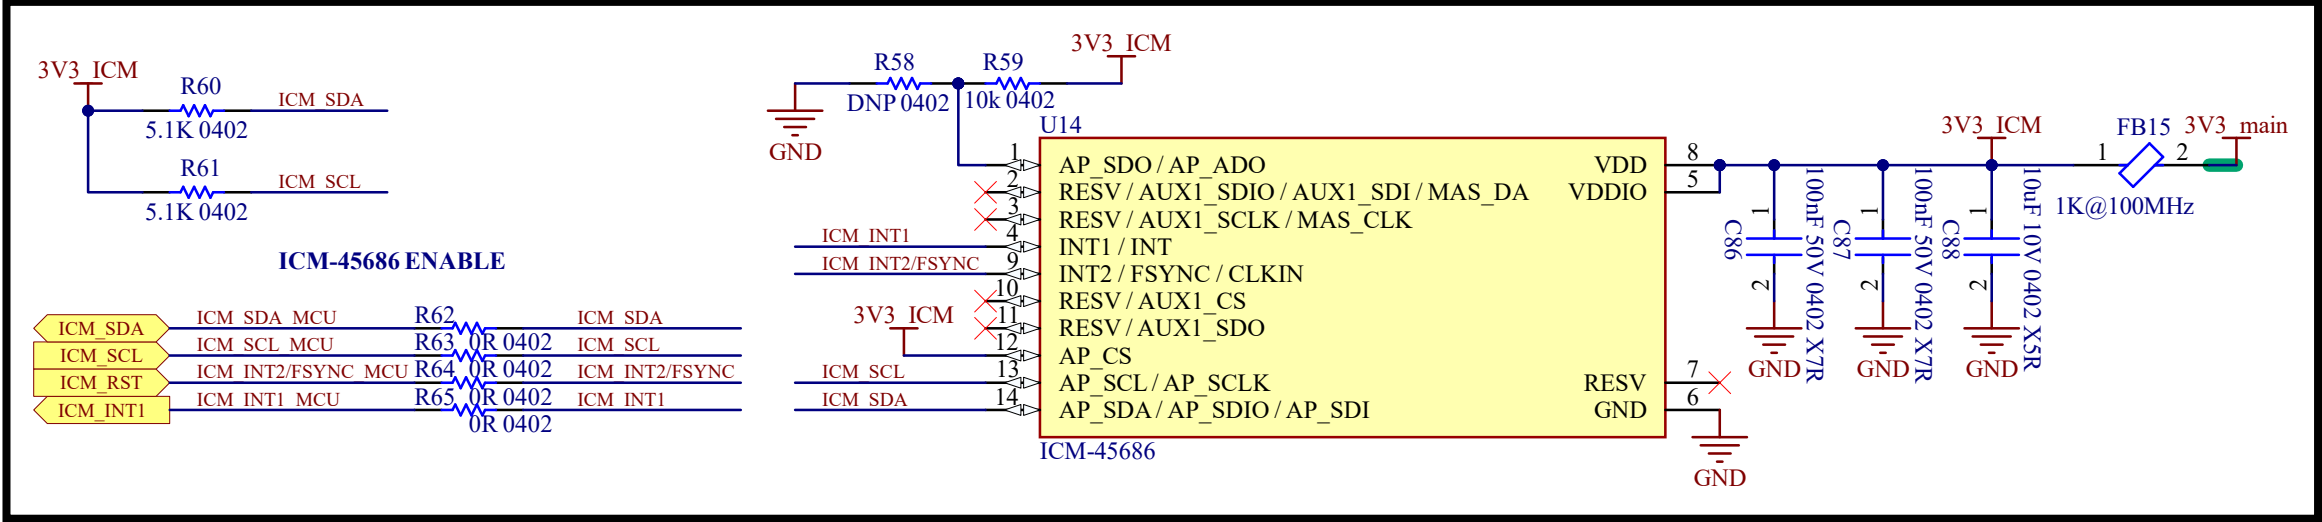

A

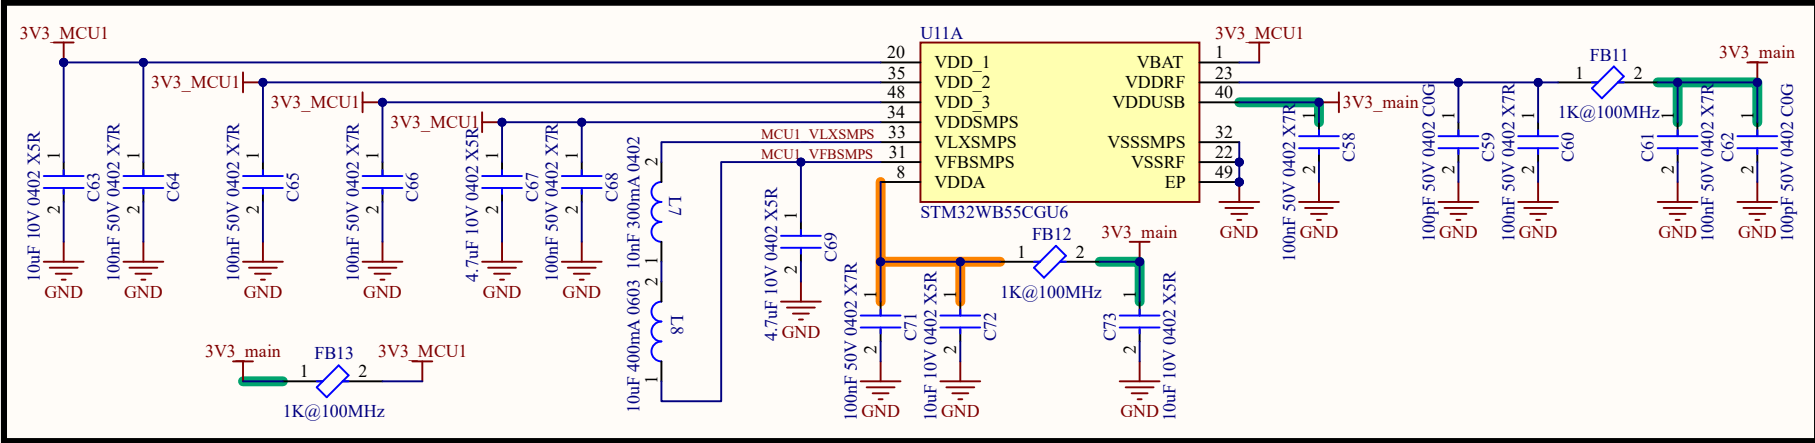


STM32WB55 DEBUG

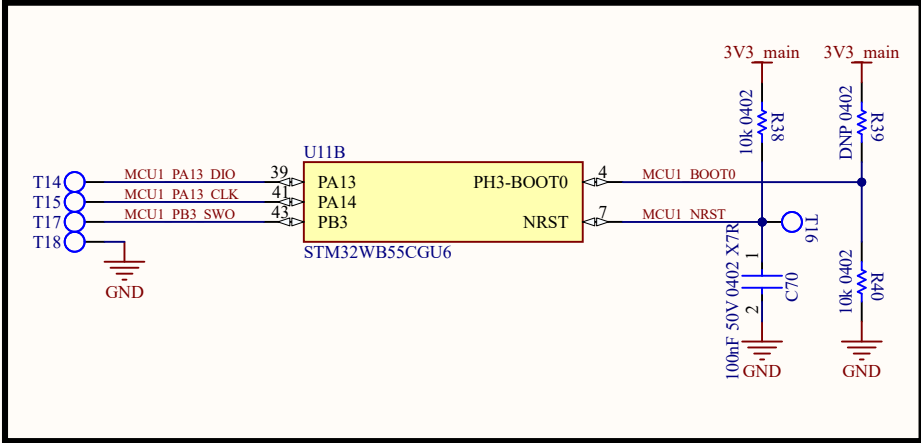


A

B

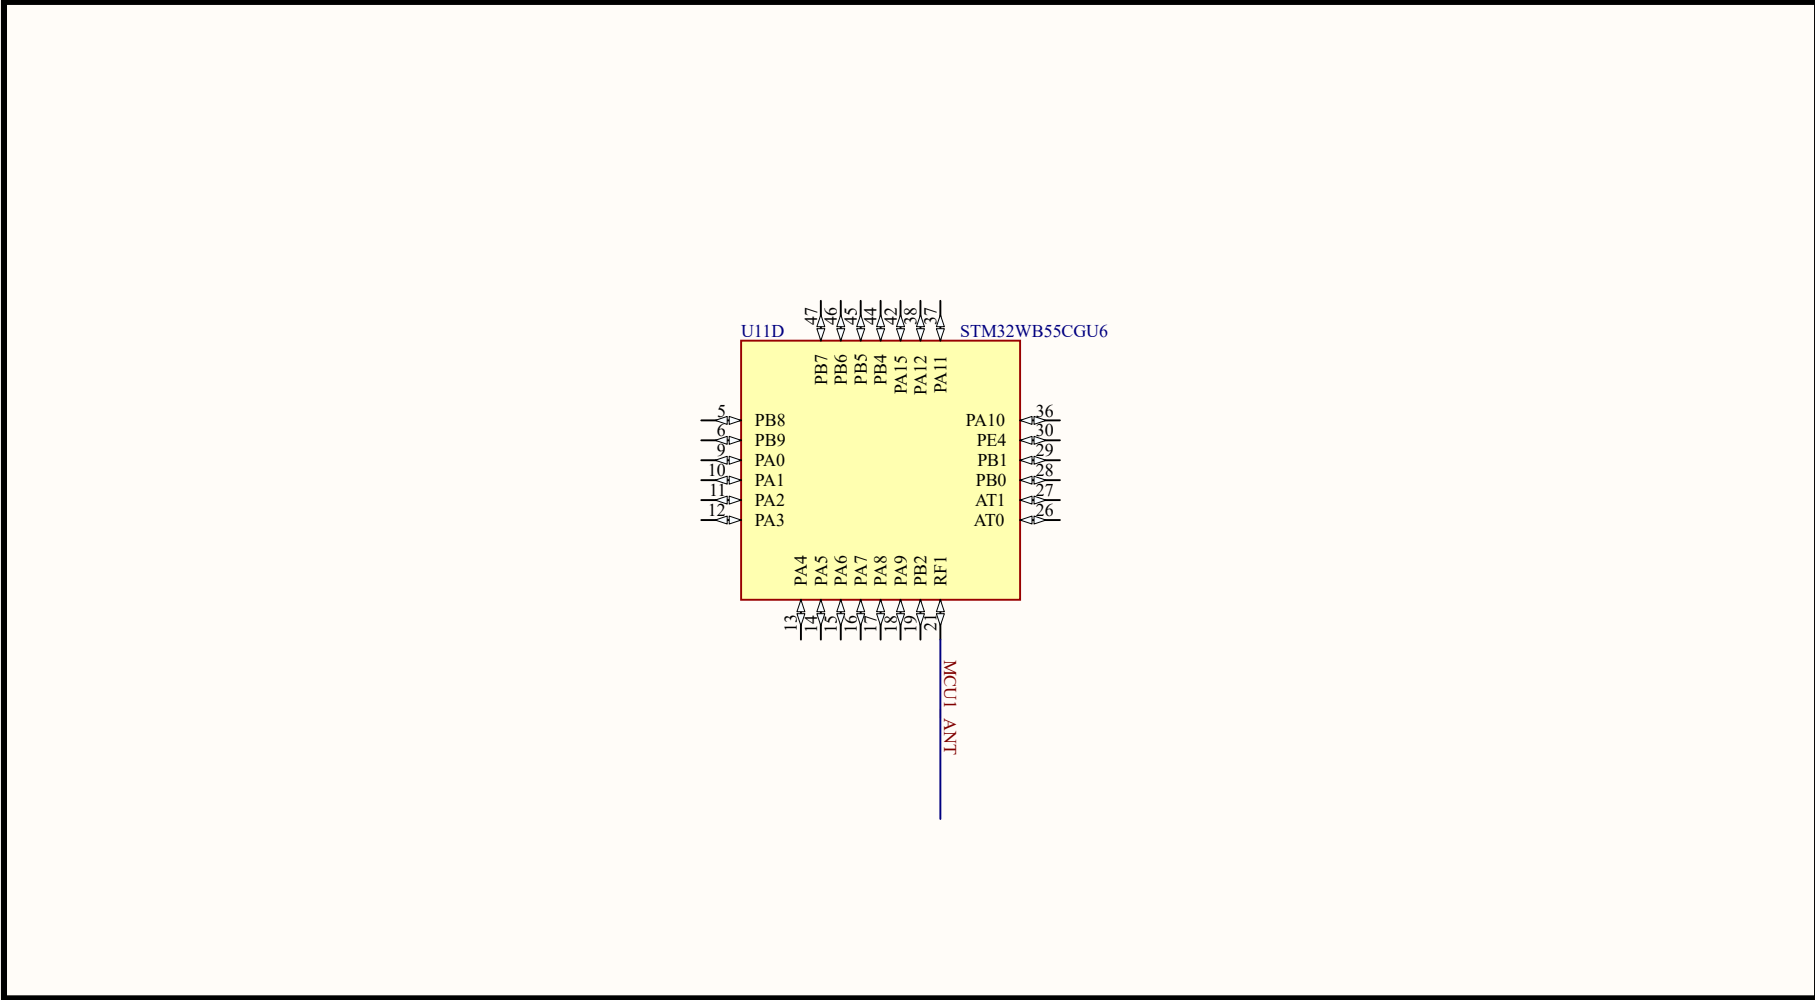


B

STM32WB55 XTAL

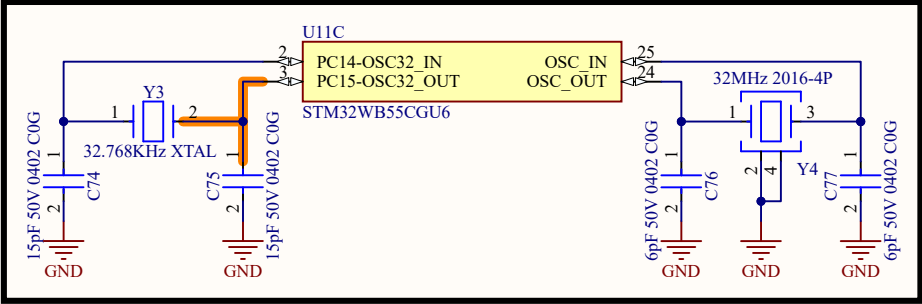

C

STM32WB55 BLUETOOTH ANTENNA

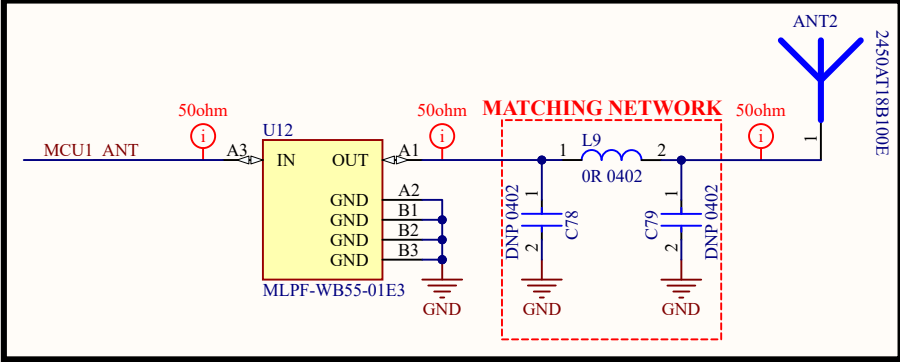

D