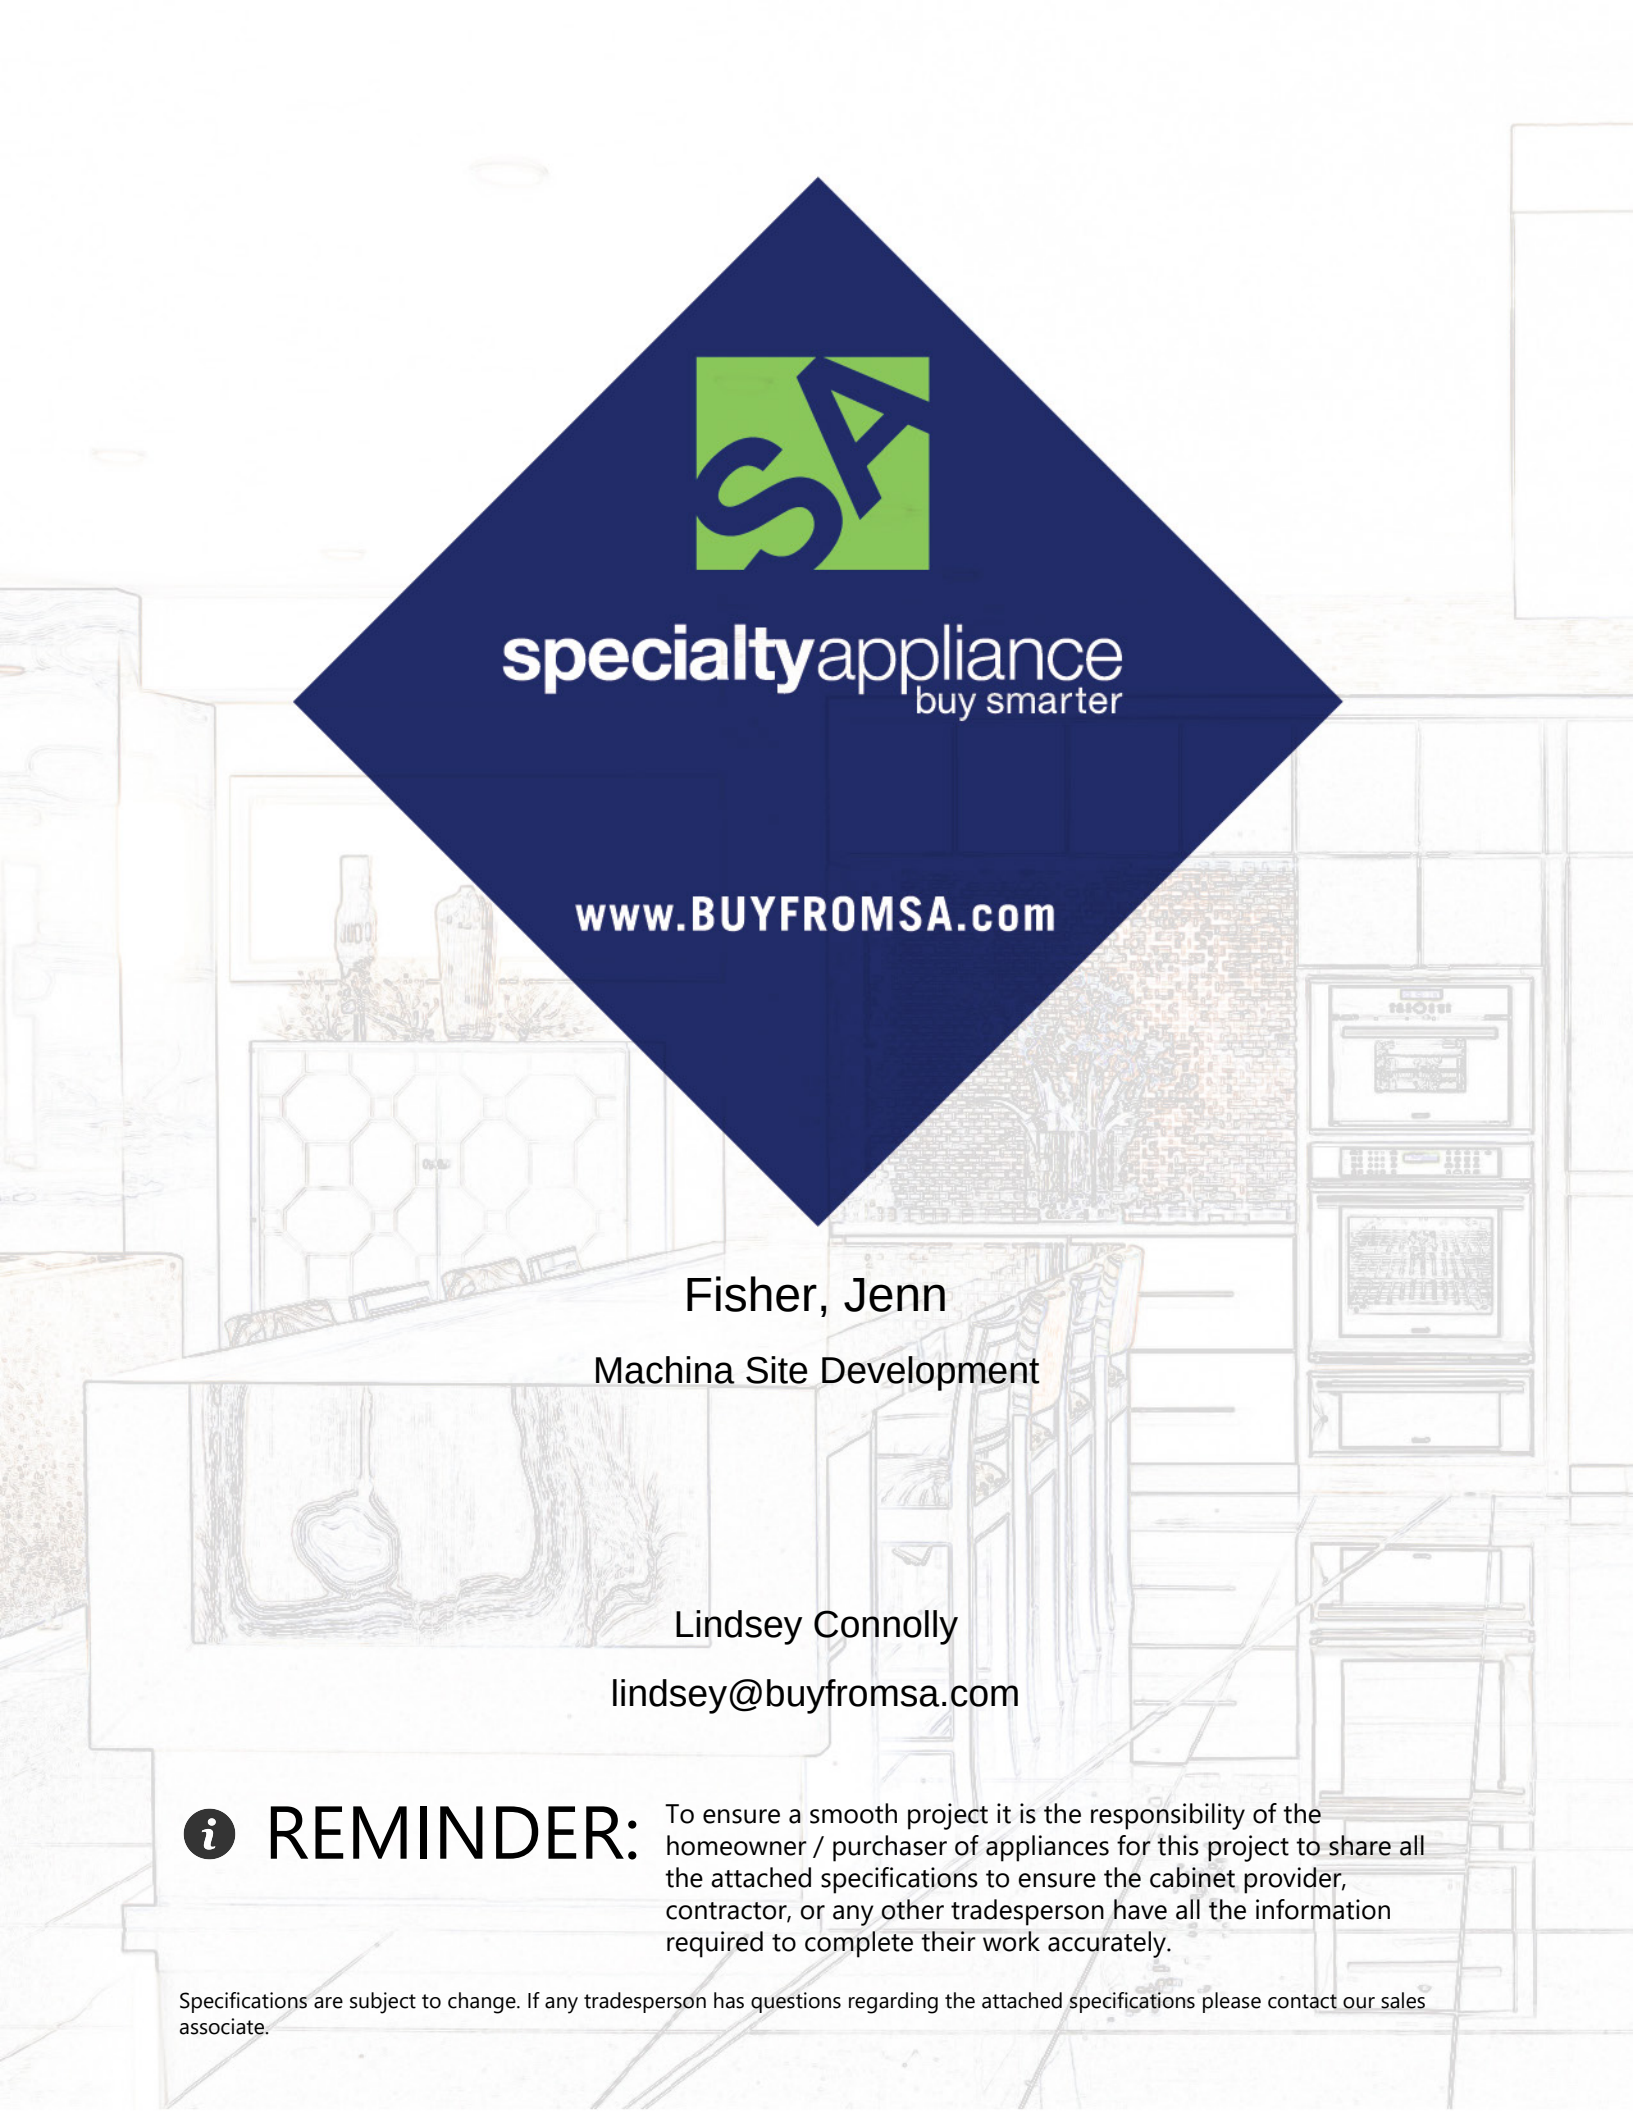



Fisher, Jenn

Machina Site Development

Lindsey Connolly

lindsey@buyfromsa.com

**REMINDER:** To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

specialty appliance
buy smarter

# Guidelines for the Best Experience

- Orders are initiated by a deposit. Full payment is required to schedule delivery and installation. There is typically a 2-3 week lead time for scheduling installation services. Please plan accordingly.
- Special Order items require a 100% deposit and are non-returnable and non-refundable. Your Sales Associate will identify what products (if any) are considered Special Order items.
- It is the Purchaser's responsibility to ensure that the site is Spec-Ready. Spec Ready means that the site is prepared in exact accordance with the manufacturer's specification as provided. If the site is not Spec-Ready, we will not be able to complete your installation as planned. It is the purchaser's responsibility to contract other needed professional services (carpenter, plumber, HVAC, electrician, etc.).
- Specialty Appliance needs open and safe access to and on your property to execute a successful delivery and install. Walkways must be clean of debris and/or snow and at least 3 ft. wide. Our Teams need an unobstructed path from the point of entrance to the final delivery location. Please advise your Sales Associate if your property has any unique obstructions that might make it difficult to facilitate the delivery (Like narrow stairs, stairs more than one story high, uneven terrain, low ceilings, etc.).
- There is a national shortage of appliances. The E.T.A.'s we get from manufacturers are rarely accurate and will likely change many times. We will do our best to keep you informed but due to the number of orders and corresponding changes- we simply cannot advise you of every change.
- Specialty Appliance will accept returns on normally stocked items within 30 days of the initial delivery date (Special Order items are non-returnable). Returned product is subject to a restocking fee.
- The appliances sold by Specialty Appliance are warranted by the respective manufacturer- not Specialty Appliance. Specialty Appliance does warrant our installation services for 1 full year.
- Our Customer Service team is here to help facilitate service as needed within the manufacturer's warranty.
- Orders must be paid in full in order to be scheduled for delivery/install.
- Cosmetic damage issues must be reported within 24 hours of the delivery. Specialty Appliance will not accept any liability for cosmetic issues reported more than 24 hours after a delivery.
- Specialty Appliance will confirm your anticipated target dates for delivery. Specialty Appliance cannot hold merchandise for more than 30 days. You may need to make storage arrangements if your project is delayed more than 30 days from your confirmed target date.

*Refer to www.buyfromsa.com/terms-and-conditions for complete terms and conditions*

**Thank you for choosing Specialty Appliance!**

APPLIANCES ARE OUR SPECIALTY

# Fisher, Jenn

Machina Site Development

3004 Washington St
Boulder, CO 80304
H-Phone: (303) 589-9057 Patrick


| *Contents* | *Page no.* |
|---|---|
| **GR366**<br>Wolf Range<br>36" Gas Range - 6 Burners | 5-6 |
| **VC36S**<br>Wolf Ventilation<br>36" Ceiling-Mounted Hood - Stainless Steel | 7-8 |
| **DW2451**<br>Cove Dishwasher<br>24" Dishwasher - Panel Ready | 9-10 |
| **CL3650UID/S/T/L**<br>Sub-Zero Refrigeration<br>36" Classic Over-and-Under Refrigerator/Freezer with Internal Dispenser | 11-12 |
| **DEU1550WA/R**<br>Sub-Zero Refrigeration<br>15" Designer Undercounter Wine Storage - Panel Ready | 13-14 |
| **WM4000HWA** | 15-19 |



**Specialty Appliance**
buyfromsa.com

**Lindsey Connolly**
3035164015


Quote **LQ6166007**
Version 2.6

Thu, Jul 16, 2026
5:16 PM MDT

enterprise.steelcod.com/sp/saco/M86L0YKN

**Note about page numbers:**
Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

**All specifications are intended for initial planning purposes only.** Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

LG Washer

4.5 cu. ft. Front Load Washer with
TurboWash™ 360°and Built-In Intelligence

**Note about page numbers:**
Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

**All specifications are intended for initial planning purposes only.**
Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer’s website or included with the appliances before installation.

# 36" GAS RANGE - 6 BURNERS

GR366

## FEATURES

Control temperature precisely with six dual-stacked, sealed gas burners for higher highs, lower lows

Enjoy quicker heat and more even cooking with this large capacity gas convection oven

Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans

Produce crisper crusts and faster sears with the powerful infrared interior broiler

Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety

Move pots and pans easily across continuous cast-iron grates

Find your kitchen style with a choice of iconic red, black, or brushed stainless control knobs

## ACCESSORIES

2-Burner Wok Grate

2-Burner Wok Grate

Bake Stone Kit

Filler Trim

Front Leg Covers

Full-Extension Ball Bearing Rack

Stainless Steel Kickplate

Brushed stainless, polished brass, chrome, or brushed brass bezels

High altitude conversion kits available

Signature red, black, brushed stainless, brushed gray, or brushed brass knob kits

5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



## KNOB OPTIONS



## TOP CONFIGURATION

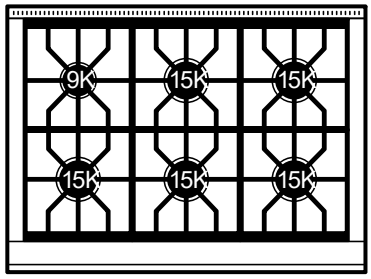


## RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 5 - 15,000 Btu burners

## OVEN INTERIOR SPECIFICATIONS

- 30,000 Btu oven burner
- 18,000 Btu oven broiler


Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.


# 36" GAS RANGE - 6 BURNERS

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | GR366 |
| Dimensions | 35 7/8"W x 37"H x 28 3/8"D |
| Oven 1 Interior Dimensions | 30"W x 18 5/8"H x 17"D |
| Oven 1 Usable Capacity | 3.7 cu. ft. |
| Oven 1 Overall Capacity | 5.5 cu. ft. |
| Door Clearance | 19 1/2" |
| Electrical Supply | 110/120 VAC, 50/60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Gas Supply | 3/4" ID line |
| Gas Inlet | 1/2" NPT |
| Receptacle | 3-prong grounding-type |


## ELECTRICAL GAS








**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified
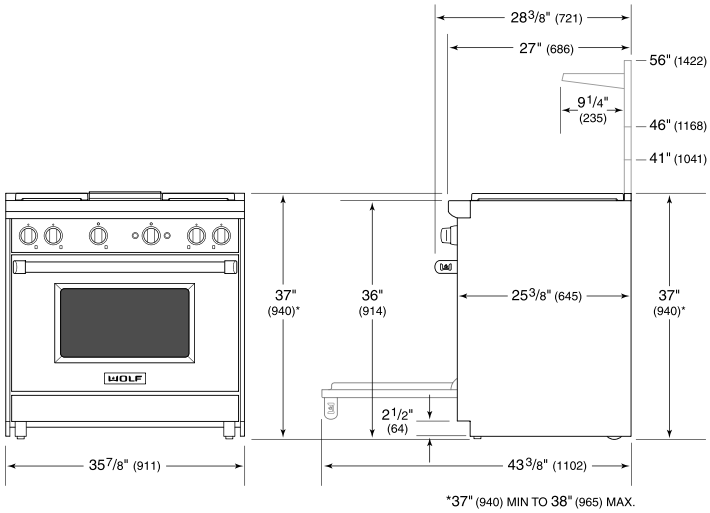
## DIMENSIONS

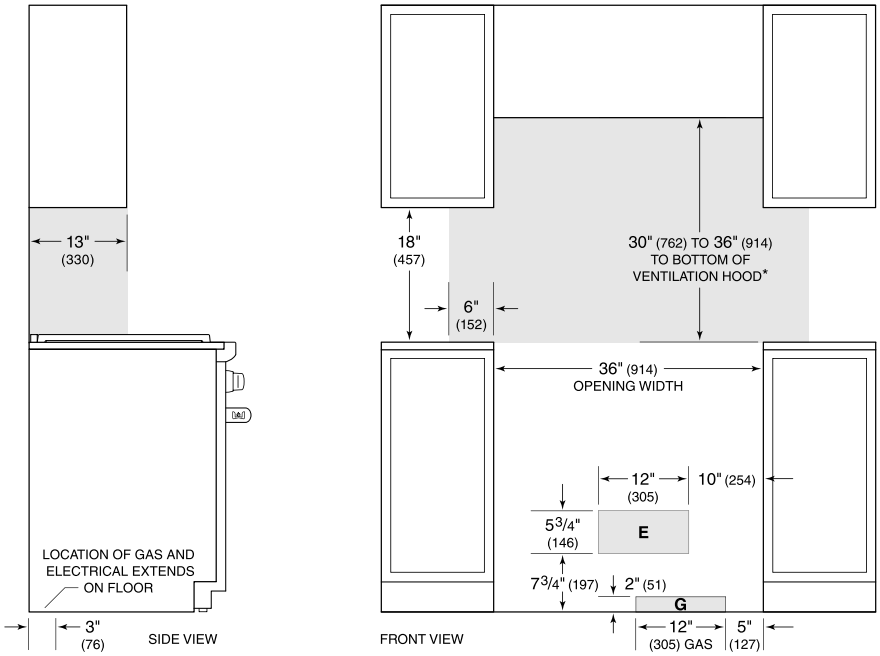


## STANDARD INSTALLATION




**Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*
*For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*

Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 36" CEILING-MOUNTED HOOD - STAINLESS STEEL

VC36S



## FEATURES

- Breathe cleaner air and enjoy less greasy residue in your kitchen
- Opt for the look of contemporary concealed ventilation
- Adjust as needed with recessed controls and an ADA compliant remote control that provide a sleeker look, yet maintain ultimate blower control
- Matches the same heavy-duty stainless-steel construction, hand-finished hemmed edges, and welded seams of all Sub-Zero, Wolf, and Cove products
- Select from internal, in-line, or remote blower options (blower required)
- Lights your workspace with two LED light bars with two brightness settings
- Minimizes the backward flow of cold air with backdraft transition

## ACCESSORIES


- Make-Up Air Damper
- Recirculating Filters
- Remote Control
- Inline Blowers
- Internal Blowers
- Remote Blowers

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

## BLOWER OPTIONS

- 600 CFM Internal
- 600 CFM Inline
- 600 CFM Remote

## OPENING DIMENSIONS

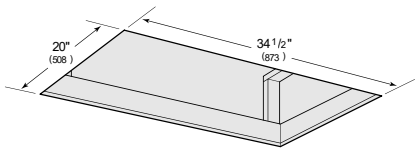



Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 36" CEILING-MOUNTED HOOD - STAINLESS STEEL

## PRODUCT SPECIFICATIONS


| | |
|---|---|
| Model | VC36S |
| Dimensions | 35 1/2"W x 12 1/4"H x 21"D |
| Electrical Supply | 110/120 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Discharge Location | Vertical or Horizontal |
| Discharge Dimensions | 6" round internal or 10" round inline or remote |
| Bottom of Hood to Countertop | 36" to 84" |

## ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

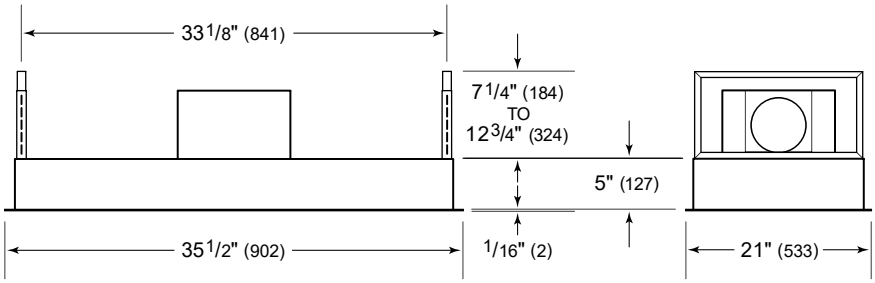


Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 24" DISHWASHER - PANEL READY

## DW2451

## FEATURES

Cove's new advanced wash system drives three powerful spray arms, 45 spray jets, and a fine-mesh filter that removes food and grease and circulates clean water

Every glass, dish, and utensil comes out spotless and dry thanks to the hot rinse and fan assist

Whisper-quiet operation means you can keep the conversation flowing while running a load of dishes

Quality and aesthetics meet in a striking stainless-steel interior with a clean, fastenerless design

12 wash cycles and 6 add-on options can be mixed and matched, allowing you to personalize cleaning to your needs

Offers infinite interior variations to meet your dishwashing needs; height-adjustable middle rack and fold-down tines accommodate large pots and tall items

Loading and unloading is easy with interior LED lights that aid in visibility

Stainless or panel-ready options complement any décor and coordinate perfectly with other Sub-Zero and Wolf appliances

Dishwasher disappears into the kitchen with hidden control panel and discreet status light

With our convenient Owner's App, you can remotely start or monitor a cycle, receive alerts when rinse aid is low—even set up auto-replenishment

Cove's leak protection system offers peace of mind in the rare event of a leak. A conductivity sensor in the base of the unit will automatically stop a cycle in progress if it detects a leak

## ACCESSORIES

4" Stainless Kickplate - 24" Opening

4" Stainless Kickplate - 60cm Opening

Pro Handle Kit

Tubular Handle Kit

24" Stainless Steel Door Panel Kits

60cm Stainless Steel Door Panel Kits

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



## HANDLE ACCESSORIES

PRO



TUBULAR



## PRODUCT DETAILS

### DISHWASHER

- 4 LED lights (2 sides; 2 top)
- 45 spray jets across 3 spray arms
- Four-stage, fine mesh filter
- Adjustable stemware rail
- Adjustable cup shelf
- Height-adjustable middle rack
- Easy-glide bottom rack
- Upper silverware rack
- One large utensil basket
- Fold-down tines on lower and middle racks


Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 24" DISHWASHER - PANEL READY


## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | DW2451 |
| Dimensions | 23 5/8"W x 34 1/2"H x 23 1/4"D |
| Door Clearance | 26 3/4" |
| Sound Level | 41 dBA (Model and cycle/option dependent) |
| Electrical Supply | 115 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Receptacle | 3-prong grounding-type |
| Cord Length | 6' |
| Water Connection | 5' braided tubing with 3/8" female compression fitting |
| Drain Connection | 5' (1.5 m) corrugated tubing |
| Plumbing Pressure | 30–140 psi |

## ELECTRICAL





## PLUMBING




**COVE OPENING WIDTH** Cove dishwashers accommodate varying opening widths. A 23 5/8" (60 cm) width provides minimum reveals and is ideal for new construction. A 24" width is also common; however, reveals for a 24" opening will be larger than the reveals for a 23 5/8" opening unless the panel width is adjusted accordingly. 24" and 60 cm stainless steel panels are available and must be specified accordingly.


**PANEL SPECIFICATIONS** For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

## INTERIOR VIEW

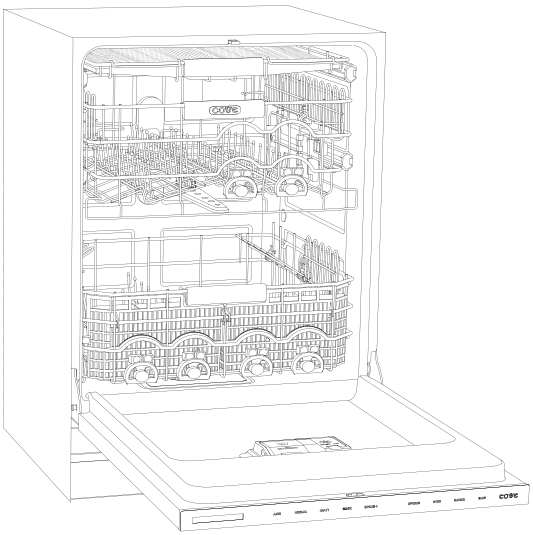


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


## DIMENSIONS

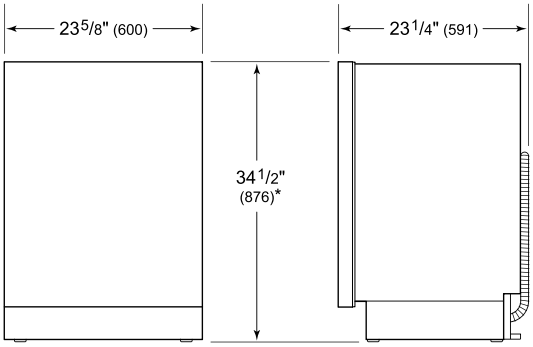


*33 3/4" (857) MIN TO 34 3/4" (883) MAX

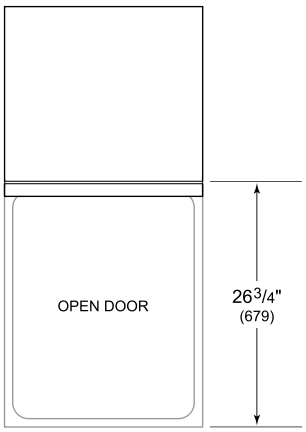


## 24" INSTALLATION

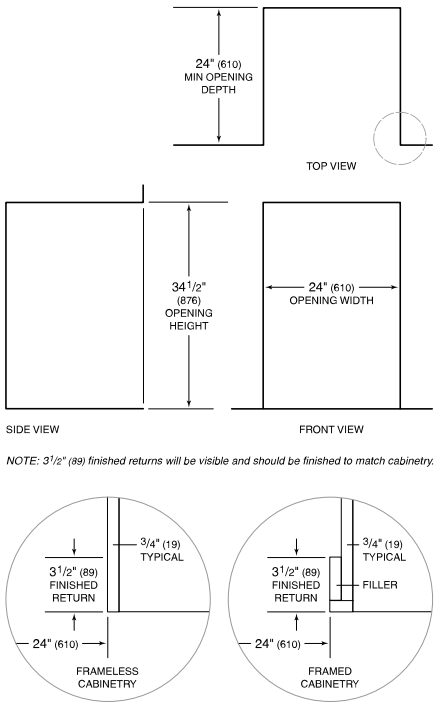

# 36" CLASSIC OVER-AND-UNDER REFRIGERATOR/FREEZER WITH INTERNAL DISPENSER

**CL3650UID/S**

## FEATURES

Split Climate® intelligent cooling system revolutionizes Sub-Zero's already-superior preservation capabilities, keeping food even fresher for longer

ClearSight® LED lighting system fully illuminates the interior and reduces shadows.

Sleek stainless accents trim the interior, matching the sophistication of the exterior

Touch control panel is conveniently located for easy access at the tap of a finger

Night Mode optimizes the interior lighting based on the detected ambient light, reducing the brightness by 90% in dim environments

Lift the base of the flip-up dairy compartment to store taller items on the shelf below

Delivers fresh, filtered water through an internal dispenser located discreetly within the refrigerator

Filtered ice is ready on demand; activate Max Ice Mode to temporarily increase ice production

Wi-Fi enabled for convenient remote access using your mobile device or smart home system

Position adjustable door bins at various heights to accommodate assorted items

Stainless-steel exterior and tubular or pro handles to match other Sub-Zero, Wolf, and Cove products

Sub-Zero offers an industry-leading full two-year warranty on appliances, along with a full five-year sealed system warranty

## ACCESSORIES

90° Door Stop

Air Purification Cartridge

Custom Front Panel Mounting Kit

Custom Side Panel Mounting Kit

Dual Installation Kit

Egg Container

Grille Frame - 84"

Stainless Steel Pro Louvered Grille - 84"

Stainless Steel Side Panel

Water Filter

Dual Installation Kit with Dual Wide Grille

Stainless Steel Kickplate

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



## HANDLE OPTIONS

PRO



TUBULAR



## PRODUCT DETAILS

### REFRIGERATOR

- 4 glass refrigerator shelves (3 adjustable; 1 stationary)
- 2 crisper drawers with removable dividers
- 3 refrigerator door bins (2 adjustable; 1 stationary)
- 1 flip-up dairy compartment
- Air purification system
- Internal water dispenser
- LED refrigerator and freezer lights

### FREEZER

- Full-extension drawer
- Water filtration system
- Automatic ice maker with removable ice container


Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.


# 36" CLASSIC OVER-AND-UNDER REFRIGERATOR/FREEZER WITH INTERNAL DISPENSER

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | CL3650UID/S |
| Dimensions | 36"W x 84"H x 24"D |
| Refrigerator Capacity | 15.5 cu. ft. |
| Freezer Capacity | 5.2 cu. ft. |
| Weight | 552 lbs |
| Electrical Supply | 115 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Plumbing Supply | 1/4" OD copper, braided stainless steel or PEX tubing |
| Plumbing Pressure | 35–120 psi |
| Receptacle | 3-prong grounding-type |

## ELECTRICAL PLUMBING





**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified


## INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

## DIMENSIONS

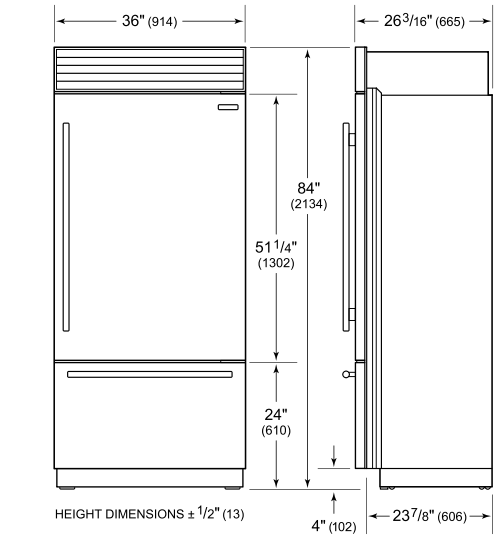


## STANDARD INSTALLATION

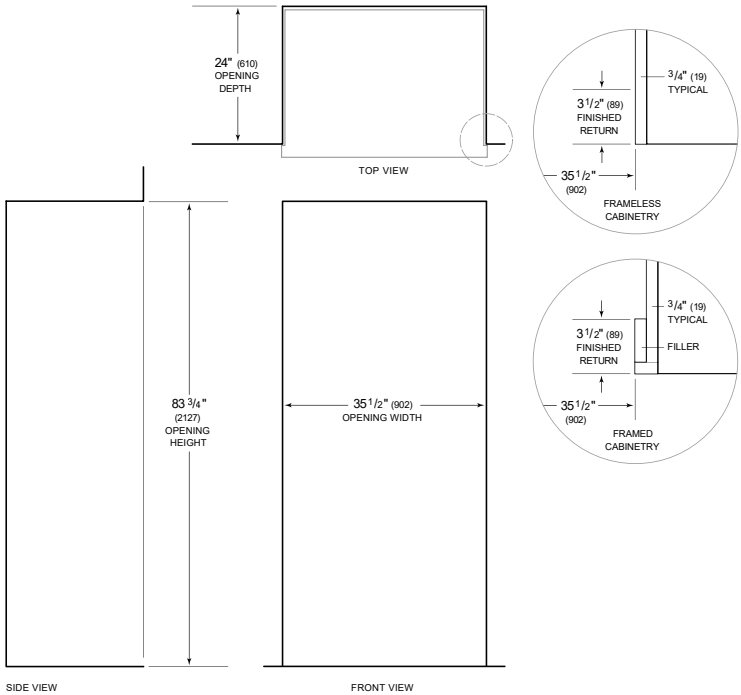


NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry
Shaded line represents profile of unit.

Specifications are subject to change without notice. This information was generated on July 1, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 15" DESIGNER UNDERCOUNTER WINE STORAGE - PANEL READY

**DEU1550W**

## FEATURES

- Fully customizable exterior—accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to coordinate with other Sub-Zero, Wolf, and Cove appliances
- Seamlessly integrating anywhere, undercounter wine storage adds comfort to your master suite, creates a corner for libations in the study—the options are endless
- Offers 24-bottle capacity
- UV-resistant glass door shields wine from harmful light
- Control your appliance from wherever you are using our convenient Owner's App—adjust temperatures, be notified of a door left ajar, or receive remote service diagnostics
- Precision temperature control to within one degree of setpoint preserves wine at its optimal temperature
- Full-extension wine racks provide easy access to standard-size bottles, half bottles, and magnums without agitating others
- Inventory tile system aids collection organization

## ACCESSORIES

- Custom Panel Lock Kit
- Pro Handle
- Tubular Handle
- Wine Inventory Tiles
- Wine Inventory Tiles - Writable
- Stainless Steel Glass Door Panels
- Undercounter Solid Overlay Door
- Stainless Steel Dual Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



## HANDLE ACCESSORIES

PRO



TUBULAR




# 15" DESIGNER UNDERCOUNTER WINE STORAGE - PANEL READY

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | DEU1550W |
| Dimensions | 15"W x 34 1/2"H x 23 1/8"D |
| Door Clearance | 17 1/2" |
| Weight | 131 lbs |
| Electrical Supply | 115 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Wine Storage Capacity | 24 Bottles |

## ELECTRICAL





**NOTE:** The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

**PANEL SPECIFICATIONS** For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


## DIMENSIONS

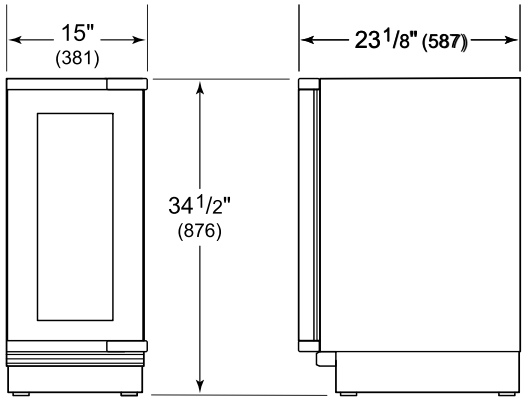



HEIGHT DIMENSIONS ± 1/2" (13)

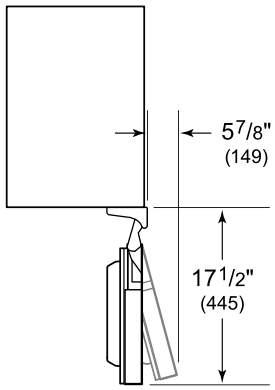


## STANDARD INSTALLATION

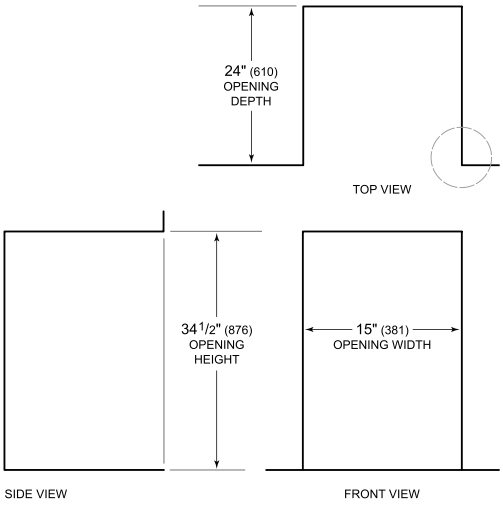


*NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry.*

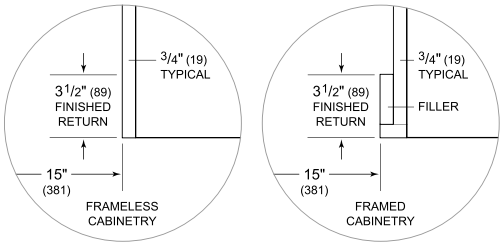

KEY FEATURES

SMART APPLIANCE

PRODUCT FEATURES

## LG LAUNDRY

# WM4000H_A

## 4.5 cu. ft. Front Load Washer with TurboWash™ 360° and Built-In Intelligence

4.5 cu. ft. Ultra Large Capacity
TurboWash™ 360° Technology
AI Fabric Sensor/ Smart Pairing™
AAFA certified LG washer
ThinQ® App with ThinQ Care
Tempered Glass Door
ColdWash™ Technology
Direct Drive Motor 10-Year Limited Warranty
ENERGY STAR® Certified
Closet Depth
NeveRust™ Stainless Steel Tub

AVAILABLE COLORS

WHITE

BLACK STEEL



### Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

| SUMMARY | |
|---|---|
| Type | Front Load Washer |
| Capacity (cu.ft.) | 4.5 cu. ft. |
| Matching Electric Dryer | DLEX4000W, DLEX4000B |
| Matching Gas Dryer | DLGX4001W, DLGX4001B |
| Color | White (W), Black Steel (B) |
| **APPEARANCE** | |
| Hard Buttons | Yes |
| Touch Buttons | Yes |
| Dial-A-Cycle™ | Yes |
| **ENERGY** | |
| ENERGY STAR® Most Efficient 2019 | Yes |
| ENERGY STAR® Qualified | Yes |
| CEE Tier | 2 |
| IMEF | 2.92 |
| IWF | 2.9 |
| **WASH PROGRAMS** | |
| No. of Programs | 12 |
| Wash Programs | Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™, Downloaded |
| **WASH OPTIONS** | |
| No. of Options | 13 |
| Options | TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, ColdWash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only |

| WASH DETAILS | |
|---|---|
| No. of Wash/Rinse Temps | 5 |
| Wash/Rinse Temps | Extra Hot, Hot, Warm, Cold, Tap Cold |
| No. of Spin Speeds | 5 |
| Spin Speeds | Extra High, High, Medium, Low, No Spin |
| Max RPM | 1300 |
| Water Levels | Load Sensing |
| No. of Soil Levels | 5 |
| **FABRIC CARE FEATURES** | |
| AI DD™ | Yes |
| TurboWash™ 360° Technology | Yes |
| Steam Technology | Yes |
| Allergiene™ Cycle | Yes |
| Sanitary Cycle | Yes |
| ColdWash™ Option | Yes |
| SenseClean™ System | Yes |
| **CONVENIENCE FEATURES** | |
| TrueBalance™ Anti-Vibration System | Yes |
| 4 Tray Dispenser | Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener |
| LoDecibel™ Quiet Operation | Yes |
| End of Cycle Signal | Yes |
| LoadSense | Yes |
| Child Lock | Yes |
| Auto Suds Removal | Yes |
| Leveling Legs | 4 Adjustable Legs |
| Easy Loading TilTub™ | Yes |
| **ThinQ® TECHNOLOGY** | |
| SmartDiagnosis™ (v3.0) | Yes |
| Wi-Fi | Yes |
| Remote Start and Cycle Monitor | Yes |
| Energy Monitoring | Yes |
| **MOTOR AND AGITATOR** | |
| Motor Type | Inverter Direct Drive Motor |
| Axis | Horizontal |


| MATERIALS AND FINISHES | |
|---|---|
| NeveRust™ Stainless Steel Drum | Yes |
| Cabinet | Painted Steel |
| Control Panel | Plastic |
| Top Plate | Painted |
| Door / Rim | Glass/Sand Beige |
| Door Cover | Tinted Cover |
| All Available Colors | White (W), Black Steel (B) |
| **CERTIFICATION** | |
| AAFA | Yes |
| **POWER SOURCE** | |
| Ratings | UL Listed |
| Electrical Requirements | 120V, 10 Amps |
| Type | Electric |
| **OPTIONS/ACCESSORIES** | |
| Pedestal | WDP6W, WDP6B |
| Pedestal (WxHxD) | 27" x 13 5/8" x 28" (43 7/8" D with door open) |
| LG Sidekick™ Pedestal Washer | WD300CW, WD300CB |
| LG Sidekick™ Pedestal Washer (WxHxD) | 27" x 14 1/8" x 30 3/4" (50 9/16" D with door open) |
| Stacking Kit | KSTK4 |
| **DIMENSIONS** | |
| Product (WxHxD) | 27" x 39" x 30 1/4" |
| Depth with Door Open | (55" D with door open) |
| Carton (WxHxD) | 29 3/4" x 41 7/8" x 31 1/2" |
| Weight (Product/Carton) | 187.4 / 209.8 lbs |
| **LIMITED WARRANTY** | |
| Parts and Labor | 1 Year |
| Direct Drive Motor | 10 Years |
| Drum | 3 Years |
| **UPC CODES** | |
| WM4000HWA (White) | 048231028288 |
| WM4000HBA (Black Steel) | 048231028271 |

© 2020 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 6/26/26

**⚠ WARNING**

- Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

## Tools Needed




1. Pliers
2. Flat-Blade Screwdriver
3. Level

# Choosing the Proper Location

Check the following requirements for the install location before installing the washer.

- Allow for sufficient space between the walls and the washer for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the washer may result in increased vibration and noise during operation.

## Power Outlet


- The power outlet must be within **60 inches (1.5 m)** of either side of the washer.
- Position the washer so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- Use a time-delay fuse or circuit breaker.
- It is the personal responsibility and obligation of the washer owner to have a proper outlet installed by a qualified electrician.

## Flooring

- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the washer without flexing or bouncing.
- The washer must be installed on firm flooring to minimize vibration during the spin cycle. Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the washer must not slope more than 1 inch (2.5 cm) from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

### Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least **1 inch (2.5 cm)** at the sides and **4 inches (10 cm)** behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

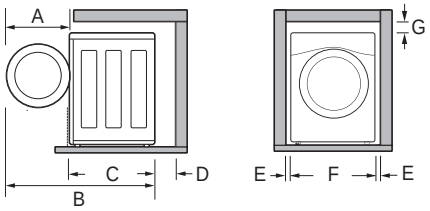



| Dimensions and Clearances | |
|---|---|
| A | 24 3/4'' (62.6 cm) |
| B | 55'' (139.6 cm) |
| C | 30 1/4'' (77 cm) |
| D | 4'' (10 cm) |
| E | 1'' (2.5 cm) |

| Dimensions and Clearances | |
|---|---|
| F | 27" (70 cm) |
| G | 1/4" (0.5 cm) |

### Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.

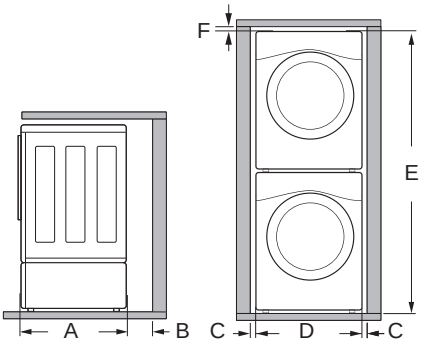


| Dimensions and Clearances | |
|---|---|
| A | 30 1/4" (77 cm) |
| B | 4" (10 cm) |
| C | 1" (0.5 cm) |
| D | 27" (70 cm) |
| E | 77 1/2" (196.8 cm) |
| F | 1/4" (0.5 cm) |

**NOTE**

- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

# Unpacking and Removing Shipping Material

Remove all shipping materials from the washer for proper operation and inspect it for shipping damage.

**⚠ CAUTION**


- Failure to remove shipping materials can cause excessive noise and vibration.

## Unpacking Shipping Material

* This feature is only available on some models.

Lift the washer off the foam base.


- After removing the carton and shipping material, lift the washer off the foam base.
- Make sure the plastic drum support ❶* comes off with the base and is not stuck to the bottom of the washer.
- If you must lay the washer down to remove the carton base ❷, always protect the side of the washer and lay it carefully on its side. Do not lay the washer on its front or back.

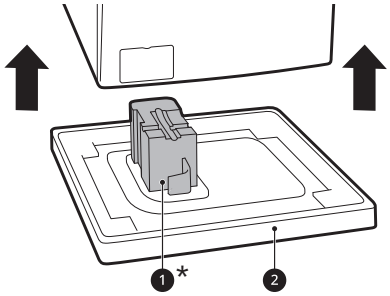


### Removing Shipping Material

**1** Remove the bolt assemblies.


- Starting with the bottom two shipping bolts ❸ , use the included wrench to fully loosen all 4 shipping bolts by turning them counterclockwise.
- Remove the bolt assemblies (bolts and retainers) by wiggling them slightly while pulling them out.

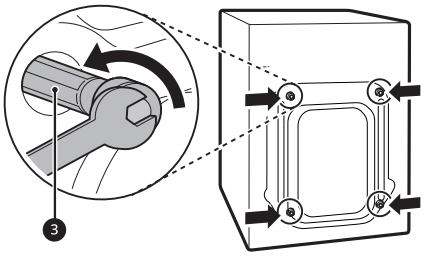


**2** Install the hole caps.


- Locate the hole caps ❹ included in the accessory pack or attached to the back of

- Let the water drain into a bucket, and check the water temperature to make sure you've connected the hoses to the correct faucets.



**4** Attach the inlet hoses to the back of the washer.

- Attach the hot water inlet hose to the hot water inlet on the back of the washer. Attach the cold water inlet hose to the cold water inlet on the back of the washer.
- Tighten the fittings securely. Turn on both faucets all the way and check for leaks at both ends of the hoses.

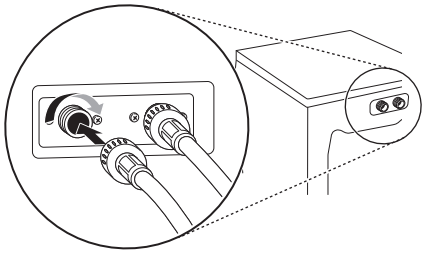

# Connecting the Drain Hose

Connect the drain hose to either a standpipe or laundry tub.

**⚠ WARNING**

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.


**NOTE**

- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Do not install the drain hose with the end lower than **29.5 inches (75 cm)** or higher than **96 inches (244 cm)** above the bottom of the washer or more than **60 inches (152 cm)** away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the drum resulting in poor wash/rinse performance or clothing damage.


## Using a Standpipe to Drain

**1** Clip the end of the hose into the elbow bracket.


- Connect the elbow bracket ❶ within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.





**2** Insert the end of the drain hose into the standpipe.



**3** Use the provided tie strap ❷ to secure the drain hose in place.





**4** If the water valves and drain are built into the wall, fasten the drain hose to one of the water hoses with the provided tie strap ❸ (ribbed side on inside).

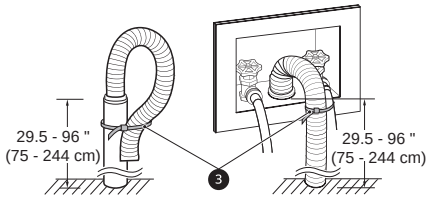



## Using the Laundry Tub to Drain

**1** Clip the end of the hose into the elbow bracket.


- Connect the elbow bracket ❶ within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.




**2** Hang the end of the drain hose over the side of the laundry tub.



**3** Use the provided tie strap to secure the drain hose in place.



# Leveling the Washer

The drum of the washer spins at very high speeds. To minimize vibration, noise, and unwanted movement, the floor must be a solid, level surface.

**⚠ CAUTION**

- Using the washer without leveling it may cause excess vibration and noise, leading to a washer malfunction.
- Adjust the leveling feet only as far as necessary to level the washer. Extending the leveling feet more than necessary can cause the washer to vibrate.

**NOTE**

- Before installing the washer, make sure that the floor is clean, dry and free of dust, dirt, water and oil so the washer feet cannot slide easily. Feet that move or slide on the floor can contribute to excessive vibration and noise.

## How to Level the Washer

**1** Position the washer in its final location.

- Take special care not to pinch, strain, or crush the water and drain hoses. If you have a carpenter's level ❶, you can use it to check that the washer is level. The slope beneath the washer should not exceed **1 inch**, and all 4 leveling feet must rest firmly on the floor.

