



DATE: 10/06/07



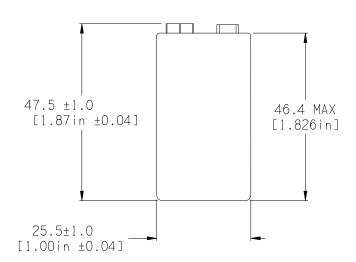

TYPICAL SPECIFICATIONS										
ELECTROCHEMICAL	SYSTEM: ALK	ALINE MANGANESE DIC	XIDE							
NOMINAL VOLTAGE	9.0									
MAXIMUM OFF-LOAD VOLTAGE: 9.9										
RATED CAPACITY: 565mAh ON 510 NTO 4.8V AT 70°F (21°C)										
AVERAGE WEIGHT: 1.62 oz (45.9 g)										
OPERATING TEMP. RANGE: -20°C TO 54°C (-4°F TO 130°F)										
ANSI DESIGNATION: 1604A OR 1604AC										
TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION						
SMOKE DETECTOR	43K 620 PULSE	BACKGROUND 1 sec/hr, 24 hr/d	7.5	30 days						

## TYPICAL MPD HOLDER NO. BA9VPC, BH9VPC, BC9VPC, BH9VW TYPICAL MPD SNAPS NO. BS6I OR BS6I-MC

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
	MN1604	522	6LR61	K9V		1604A	6AM6	A1604		6LF22	4022	BA3090/U