



Dim_Topology			
int	Location_ID	PK	Auto-inkrementacja (SERIAL)
varchar	Building		np. 'My house', 'AEI'
varchar	Wing		np. 'Main', 'Lewe'
int	Floor		np. 1
varchar	Room_Name		np. 'Testing space'

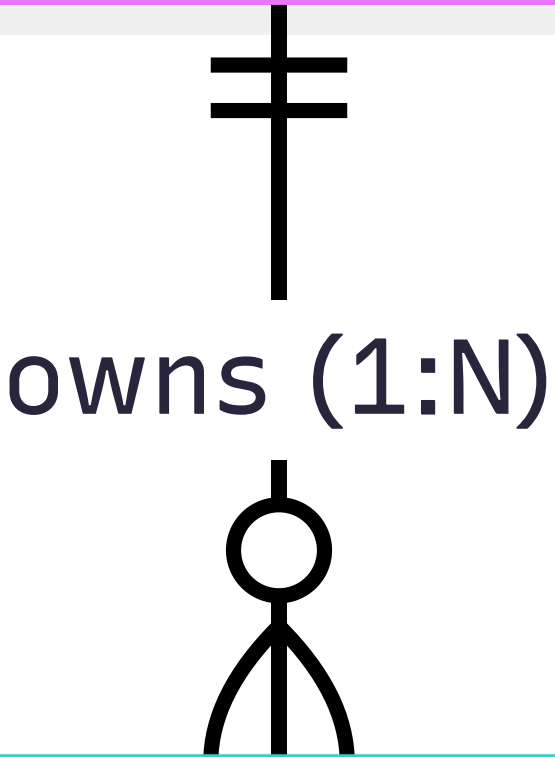

Dim_IoT_Devices			
varchar	MAC_Address	PK	np. '0x0001', 'ff:ff:...'
varchar	Device_Type		BLE_BEACON / UWB_ANCHOR
int	Location_ID	FK	Klucz obcy z Dim_Topology
varchar	Semantic_Role		np. 'Tag BLE - Desk'
int	TX_Power_Config		np. -59 (NULL dla UWB)

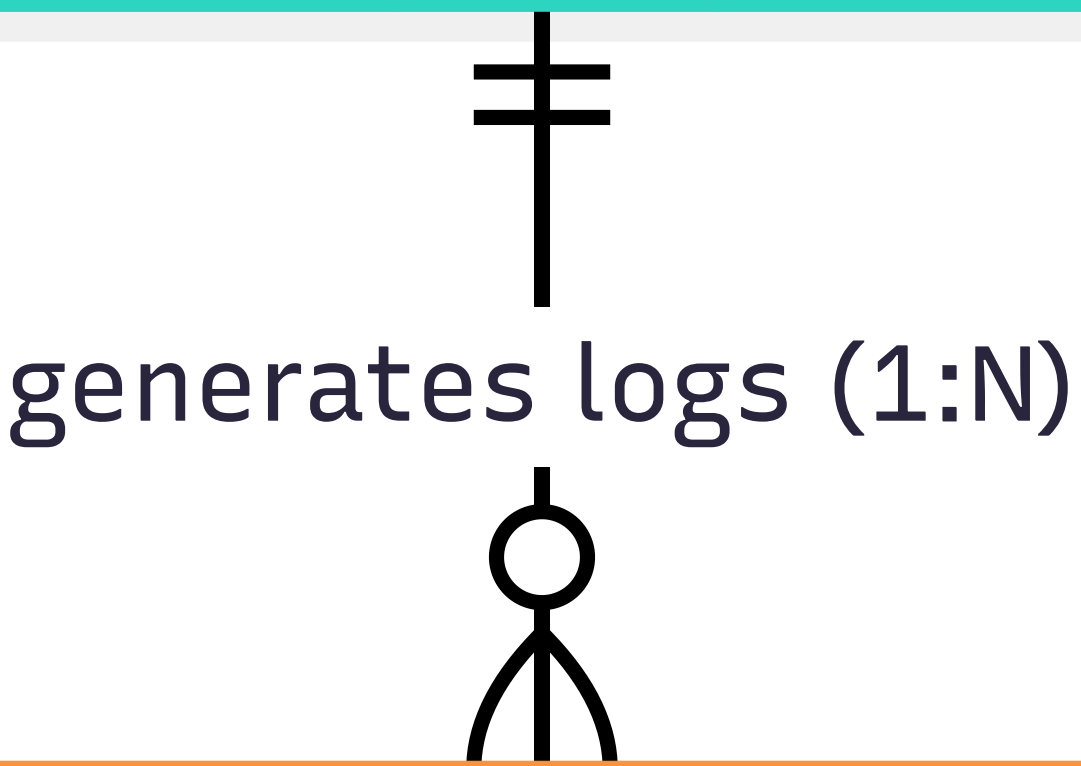

Fact_Telemetry			
int	Telemetry_ID	PK	Auto-inkrementacja (SERIAL)
timestamp	Timestamp		Domyślnie obecny czas
varchar	Scanner_ID		np. 'PHONE_USER_1'
varchar	MAC_Address	FK	Klucz obcy z Dim_IoT_Devices
decimal	UWB_Distance_m		Odległość z trylateracji
int	BLE_RSSI_dBm		Siła sygnału Bluetooth
boolean	Is_Ignored_By_Filter		TRUE, jeśli np. sygnał za słaby