


33-2 Cisco Device Security Troubleshooting **– Lab Exercise**

In this lab you will troubleshoot device security for a Cisco router.

Lab Topology

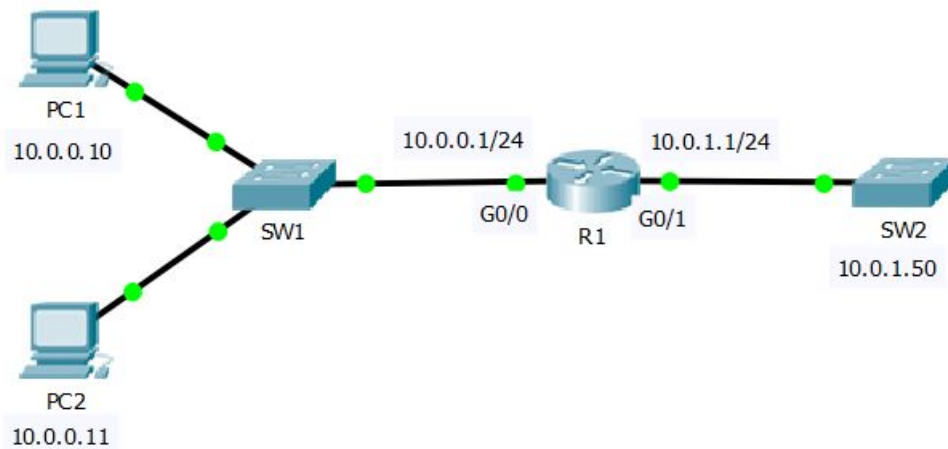

Load the Startup Configurations

Open the '33-2 Cisco Device Security Troubleshooting.pkt' file in Packet Tracer to load the lab.

Cisco Device Security Troubleshooting

A junior network administrator was tasked with configuring device security on R1 as follows:

- 1) Only allow remote access to the command line from your administrator workstation PC1. No other PCs on the 10.0.0.0/24 subnet or anywhere else in the network are allowed to access the router.
- 2) Only SSH version 2 is allowed for remote access.
- 3) Login with the username **admin** and the password **Flackbox1**.
- 4) Must have access to global configuration mode.
- 5) Must not configure **any** other passwords.

You have arrived in the office but are unable to SSH to R1 from PC1.

Your task is to troubleshoot and correct the configuration.

You must discover what has been misconfigured so the junior engineer can be retrained. Verify all problems before correcting the configuration.