


22-2 VLAN and Inter-VLAN Routing Troubleshooting – Lab Exercise

In this lab you will troubleshoot VLANs.

Lab Topology

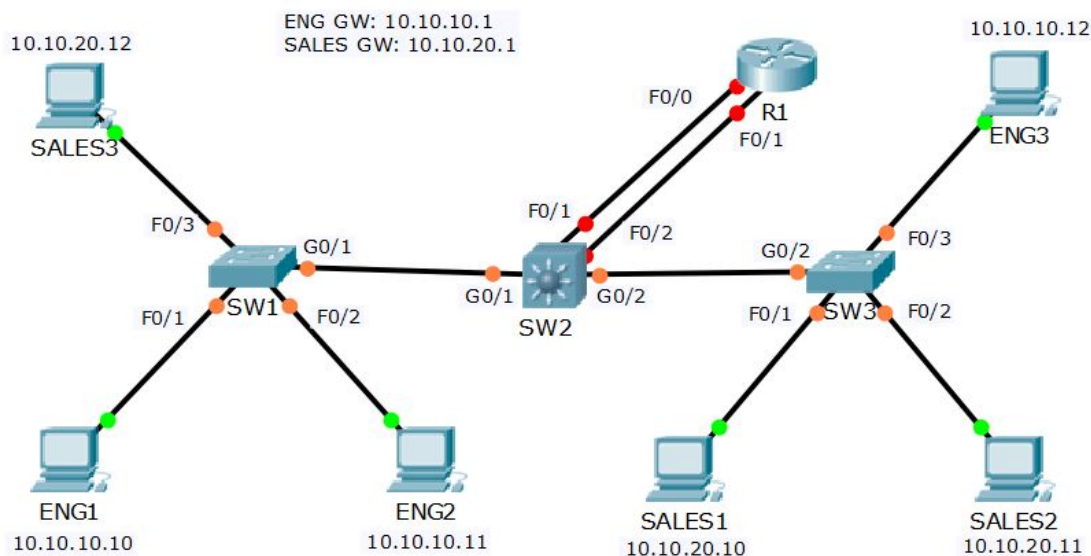

Load the Startup Configurations

Open the '22-2 VLAN and Inter-VLAN Routing Troubleshooting.pkt' file in Packet Tracer to load the lab.

VLAN Troubleshooting

- 1) The campus LAN has been configured but users are complaining of connectivity issues.

Your task is to troubleshoot the configuration and ensure that all PCs have connectivity to each other. The exercise is complete when you can ping from the Eng1 PC to Sales1.

There is a configuration error on each switch. You will need to find and fix all errors before the network will work properly.

R1 will be used as the default gateway. The PCs and router are configured correctly. Do not edit the configuration on the PCs or router.

Note that some commands may be disabled during the CCNA exam so you should know the different troubleshooting commands.

You must not use the 'show running-configuration' command (or any derivative of it such as 'show run | begin vlan) in this exercise.

You must not change the VTP configuration on any switch.

Packet Tracer can be a little slow to update after fixing problems. Try pings twice when verifying connectivity.