


24-2 HSRP Troubleshooting – Lab Exercise

In this lab you will troubleshoot HSRP.

Lab Topology

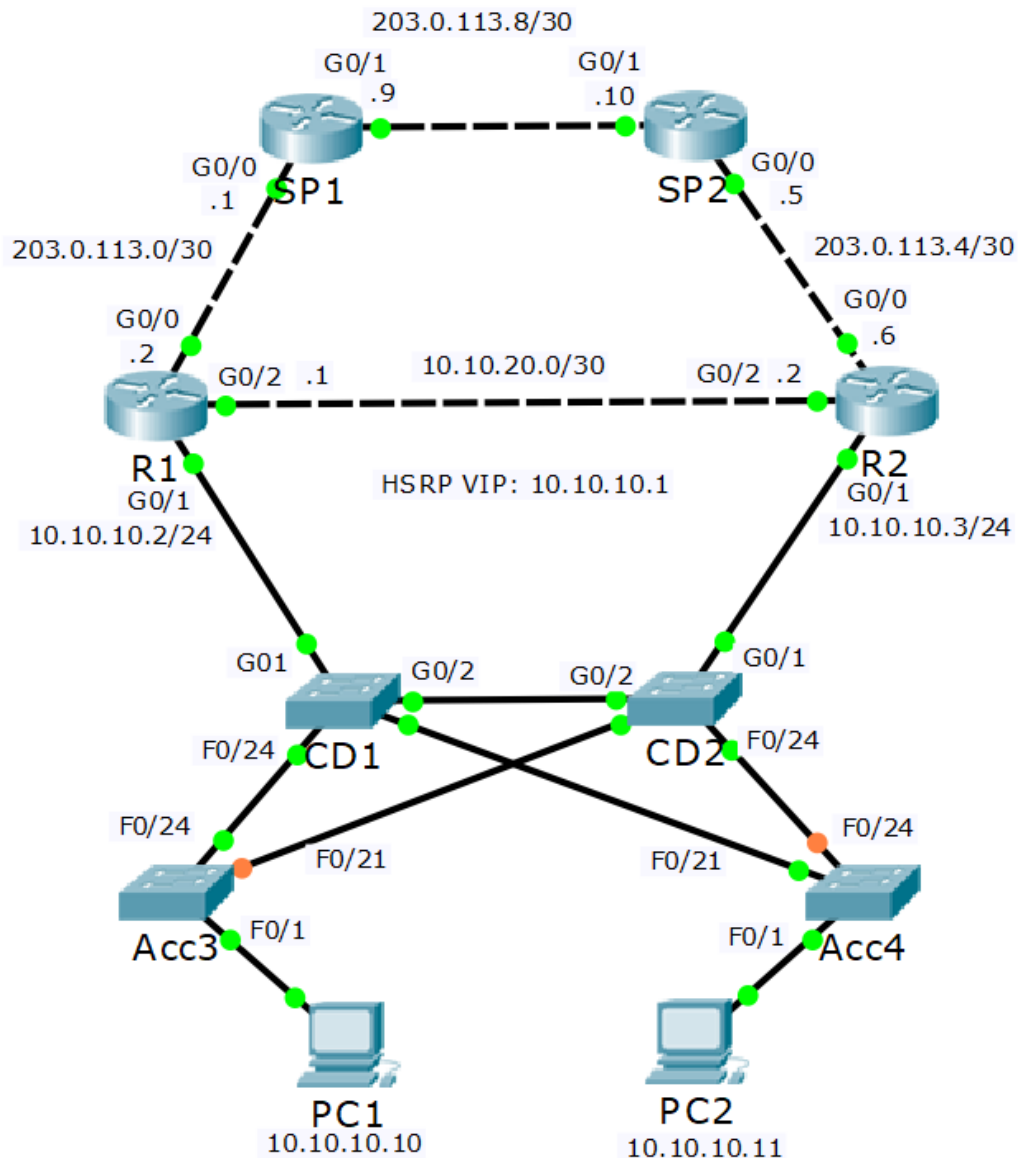

Load the Startup Configurations

Open the '24-2 HSRP Troubleshooting.pkt' file in Packet Tracer to load the lab.

HSRP Troubleshooting

- 1) HSRP was previously configured on the R1 and R2 routers and everything was working fine until last night. There was an outage on R1 and all the clients lost network connectivity. R1 has been restored but management are concerned that the issue will reoccur.

Your task is to troubleshoot the configuration and ensure that all PCs maintain network connectivity when there is an outage of either router. R1 must be the preferred router when both are available.

The exercise is complete when you can shut down interface GigabitEthernet 0/1 on R1 and HSRP fails over to R2. When you bring the interface back up again HSRP must fail back to R1.

Note that some commands may be disabled during the CCNA exam so you should know the different troubleshooting commands.

You must not use the 'show running-configuration' command (or any derivative of it such as 'show run | begin interface') in this exercise.

Give HSRP enough time to fail over when testing.