


29-2 NAT Troubleshooting – Lab Exercise

In this lab you will troubleshoot Network Address Translation.

Lab Topology

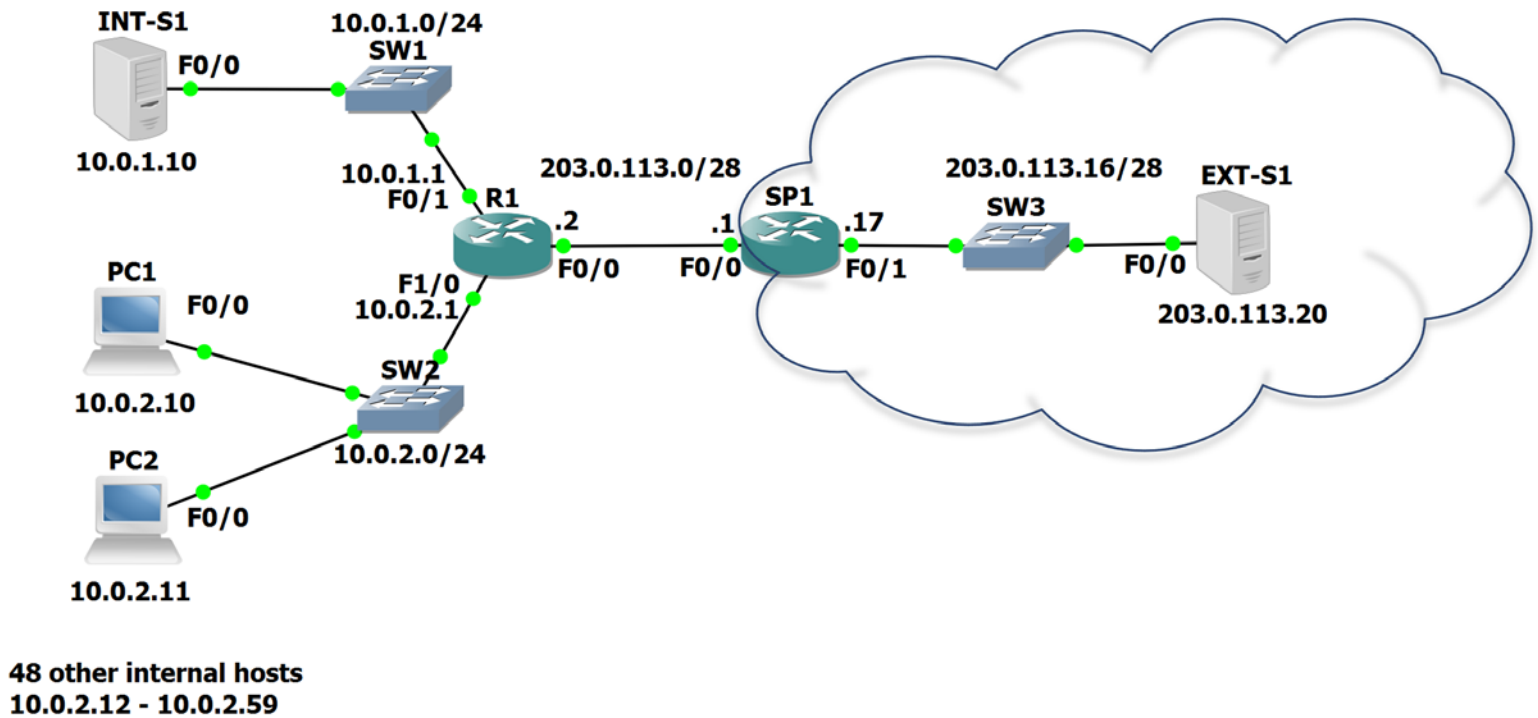

Load the Startup Configurations

Open the '30-2 NAT Troubleshooting.pkt' file in Packet Tracer to load the lab.

NAT Troubleshooting

Your company has bought the range of public IP addresses 203.0.113.0/28 for use in a new branch office. The office is not in use yet.

The Service Provider default gateway SP1 uses IP address 203.0.113.1.

203.0.113.2 is to be assigned to the Internet facing F0/0 interface on your router R1.

A junior network administrator was tasked with configuring NAT as follows:

1. A permanent translation should be set up so that external hosts on the Internet can reach the INT-S1 web server using IP address 203.0.113.3. Test this by Telnetting to port 80 on the server from EXT-S1.
2. The 50 internal hosts on the 10.0.2.0/24 internal network should be able to use the remaining public IP addresses to communicate with external hosts. Internal hosts should share public IP addresses where necessary. Test this by pinging EXT-S1 from both PC1 and PC2.

It has been reported that inbound connectivity from the Internet to INT-S1 is not working. INT-S1 and the PCs on the 10.0.2.0/24 network do however have outbound connectivity to the Internet.

Your task is to find the error, explain to the junior network administrator what their mistake was, and then fix the problem.

The task is complete when you can explain why the current configuration is not working, and you have replaced it with a working configuration.