


SECTION B-B

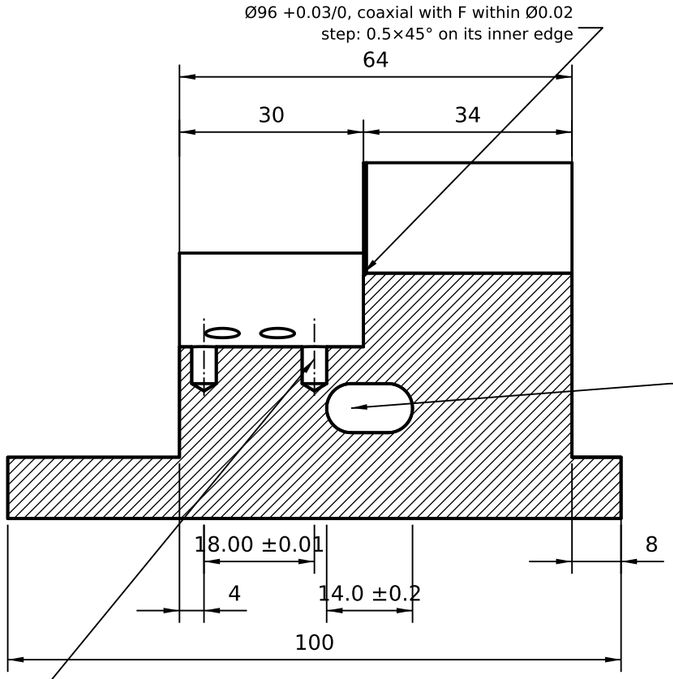

SECTION A-A

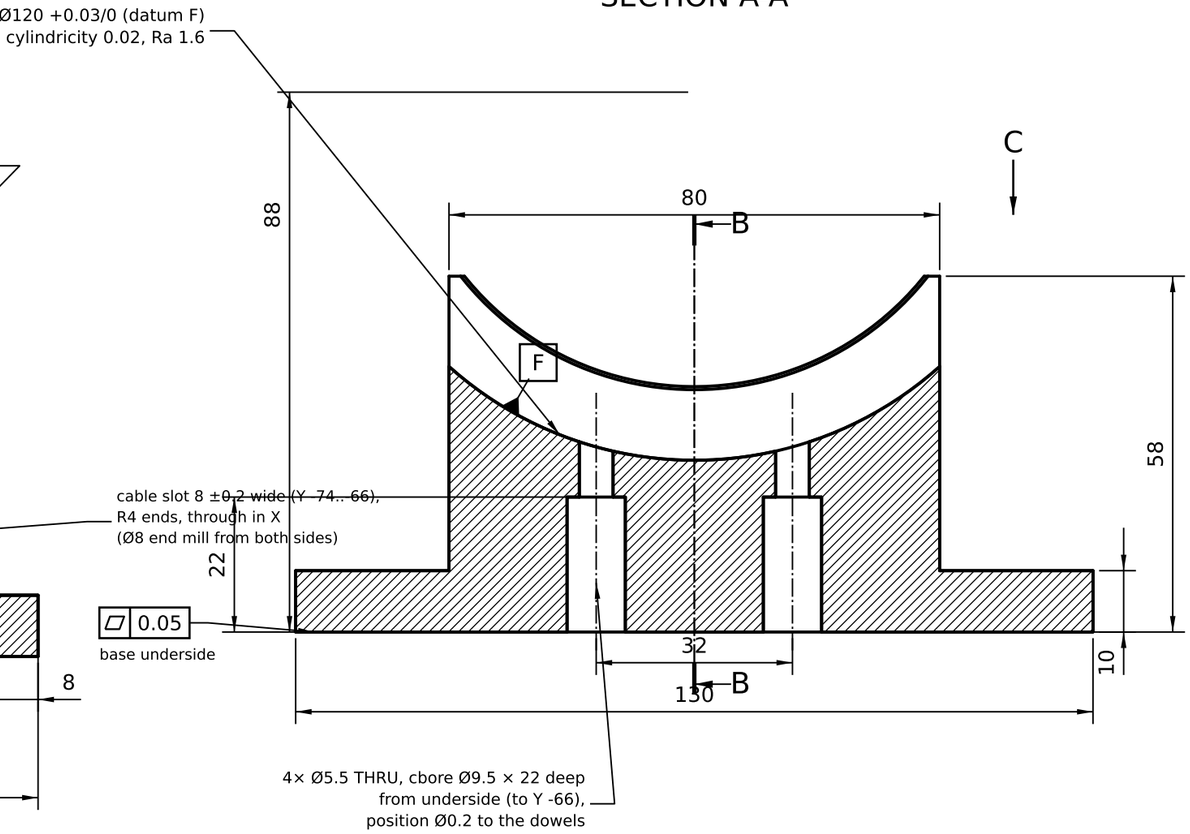

VIEW C (from above)

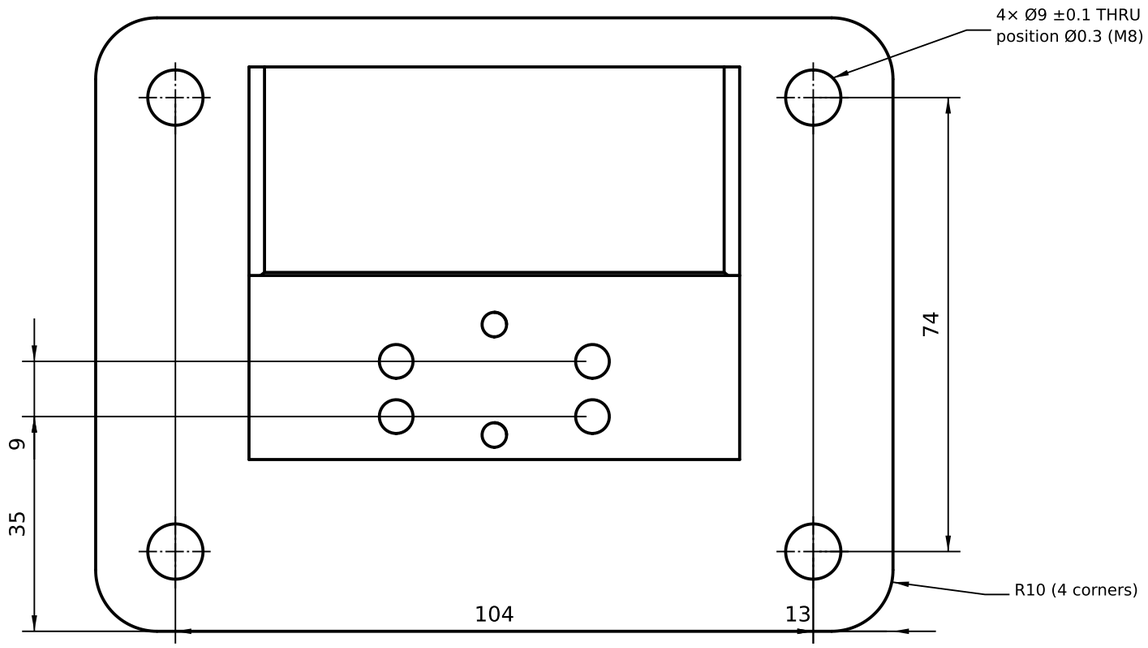

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/pedestal.step (STEVE 02e31a10 rev 48).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material EN AW-6061-T6 (T6511 plate or rectangle bar), with certificate.
7. Black anodise MIL-A-8625 Type II. MASK the saddle bores (chromate conversion there: thermal joint) and the dowel holes.
8. Datum F: Ø120 saddle axis (= housing axis). Saddle bores by circular interpolation or a boring head with the part on end; Ø120 and Ø96 in one setup if possible.
9. Saddle +0.00/+0.03 suits thermal paste. A 0.23-0.25 mm pad needs about Ø120.5: decide pad or paste before machining (open question).
10. Ø5.5 holes break out through the curved saddle with a feather edge: deburr.
11. Dowel holes are blind: leave an air vent or press slowly.
12. Model frame: STEVE part 0a76af67 revision 8 = actuator frame (axis Z, pedestal toward -Y).

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE part 0a76af67 rev 8; STEP: cnc/step/pedestal.step			
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081); Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE, ISO 128 / ISO 5456-2				
FINISH / HEAT TREATMENT: Black anodise Type II, saddle chromate				UNITS: mm	
MATERIAL: EN AW-6061-T6				SCALE: 1:1	
TITLE: **Pedestal**				QTY PER ACTUATOR: **1**	
DRAWING / PART NUMBER: **AM-05-pedestal**	REV: **A**	SHEET: 1/1	SIZE: A3	DATE OF ISSUE: 2026-10-14	