

VIEW FROM FRONT (2:1)

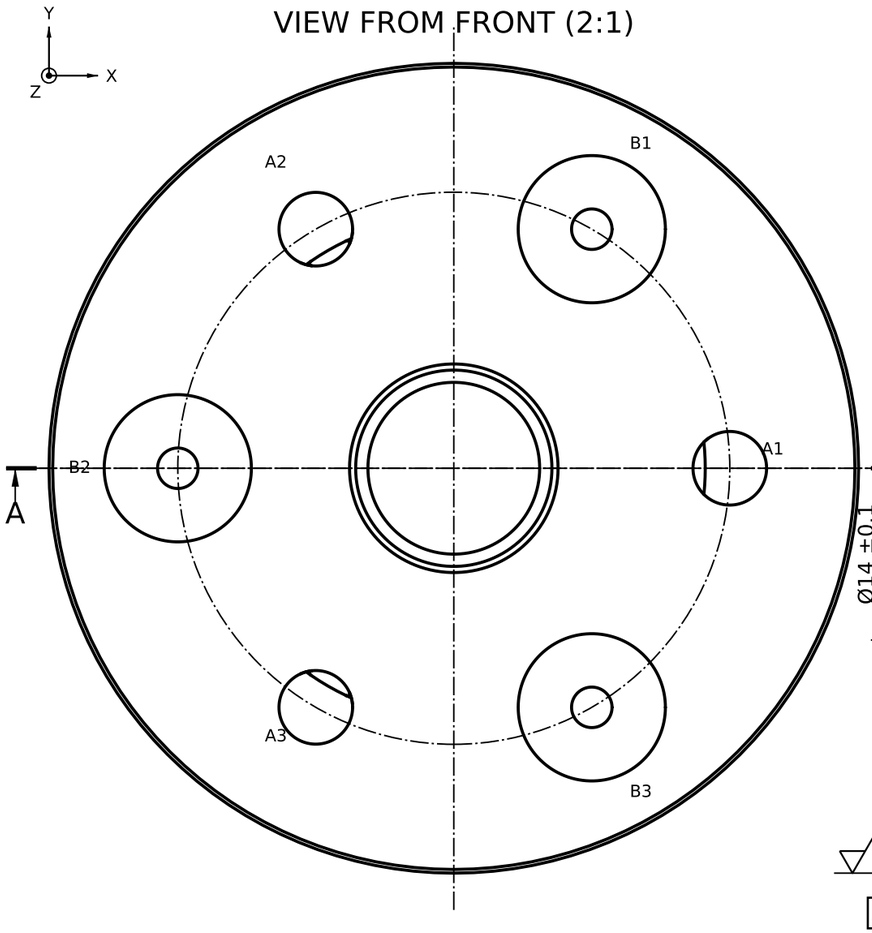


SECTION A-A (2:1)

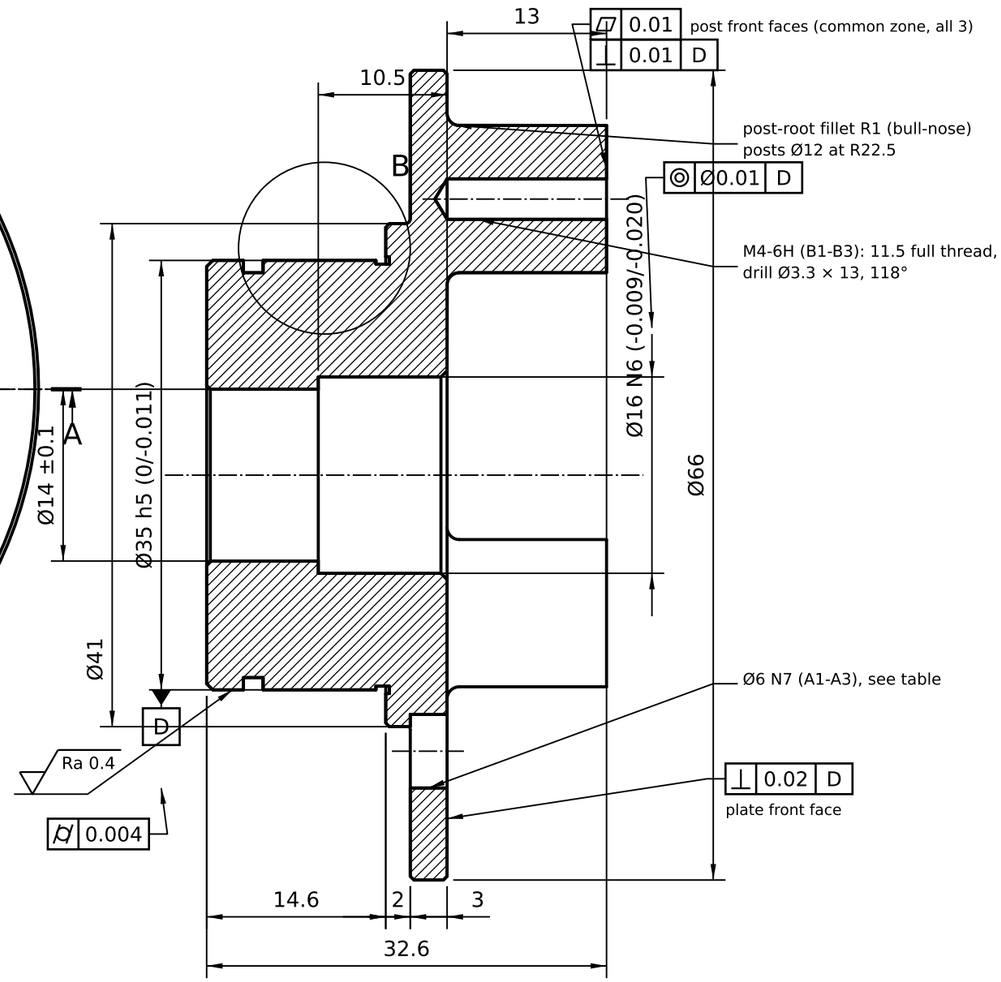

TAG	X	Y	HOLE	DEPTH / NOTE
A1	22.500	0.000	Ø6 N7 (-0.004/-0.016)	THRU plate (3)
A2	-11.250	19.486	Ø6 N7 (-0.004/-0.016)	THRU plate (3)
A3	-11.250	-19.486	Ø6 N7 (-0.004/-0.016)	THRU plate (3)
B1	11.250	19.486	M4-6H, drill Ø3.3	11.5 thd / 13 drill
B2	-22.500	0.000	M4-6H, drill Ø3.3	11.5 thd / 13 drill
B3	11.250	-19.486	M4-6H, drill Ø3.3	11.5 thd / 13 drill

1. X/Y in the STEP frame (Z axis = datum D), from post front faces (Z 60.5).
2. A1-A3: co-drill Ø5.8 with AM-07 clamped on (pins and screws in place), then ream Ø6 N7 here. True position Ø0.01 to D; pitch circle R22.500 ±0.005 (sets the gear centre distance). ISO 8734 6 m6 × 18 hardened pins pressed in.
3. B1-B3 (posts): position Ø0.1 to D. ISO 10642 M4×16 from AM-07, 11 engaged.

DETAIL B (4:1)

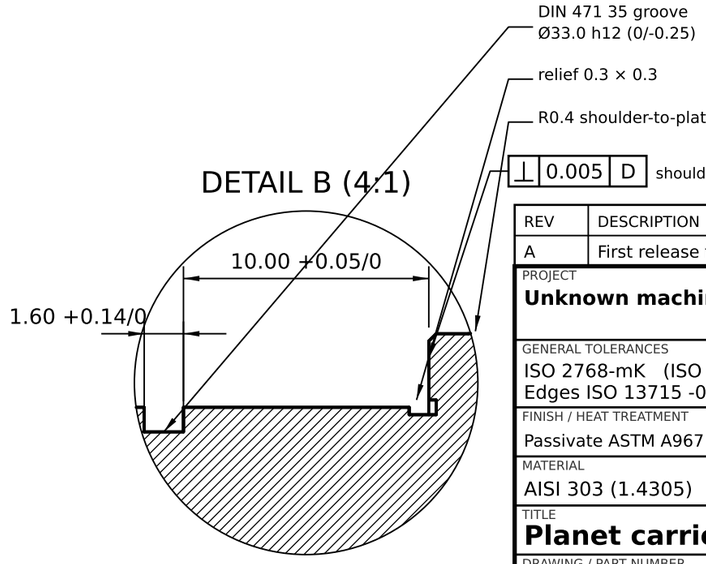

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/carrier.step (STEVE 02e31a10 rev 48).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material AISI 303 (1.4305), annealed, cold finished, with certificate (the model shows 304).
7. Passivate ASTM A967 (citric or nitric).
8. Datum D: Ø35 h5 sleeve axis (CRBH 3510 inner-ring seat). 0.5×45° lead-ins at the sleeve rear end and the Ø16 seat entry.
9. Ø16 N6 seat Ra 0.8 (INA HK1210 drawn cup).
10. Inspect: CMM sleeve, seat coaxiality, shoulder perpendicularity, pin-hole positions (with AM-07).
11. Model: STEVE part 06b08578 revision 8.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE part 06b08578 rev 8; STEP: cnc/step/carrier.step		
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081); Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE, ISO 128 / ISO 5456-2			
FINISH / HEAT TREATMENT: Passivate ASTM A967		UNITS: mm		
MATERIAL: AISI 303 (1.4305)		SCALE: 2:1 (views as noted)		
TITLE: **Planet carrier, rear part**		QTY PER ACTUATOR: **1**		
DRAWING / PART NUMBER: **AM-06-carrier**	REV: **A**	SHEET: 1/1	SIZE: A3	DATE OF ISSUE: 2026-10-14