## SECTION A-A (2:1)

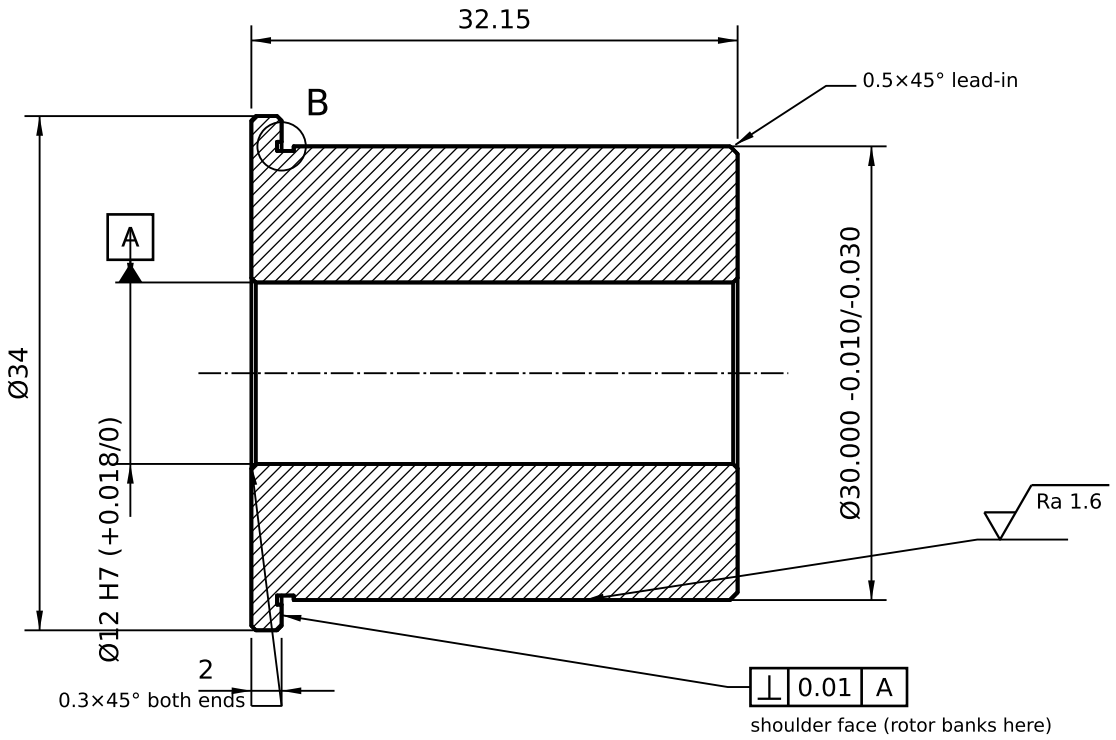


## DETAIL B (10:1)

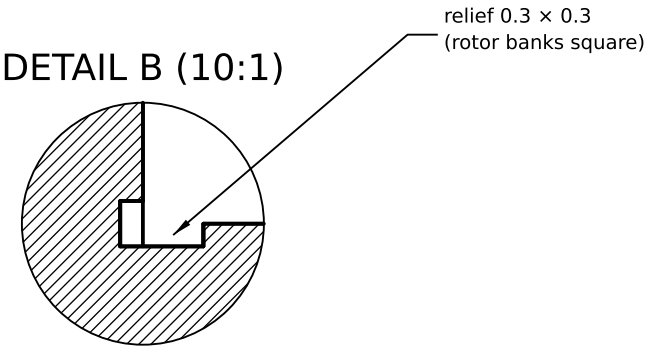


## NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/rotor.step (STEVE 02e31a10 rev 48).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Material C45E +N (1.1191), with certificate.
6. Black oxide; MASK the Ø30 bonding surface.
7. Press onto the shaft's p6 seat (AM-09 Z3) with Loctite 638. Ø30 gives 0.02-0.04 diametral clearance to the KBM rotor bore 30.010 for Hysol EA 934NA: Ra 1.6, not polished.

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First release for quotation and manufacture | 2026-10-14 | Claude |

| | | |
|---|---|---|
| PROJECT: **Unknown machine actuator** | DRAWN BY: Claude for macncrash | SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 48<br>STEP: cnc/step/rotor.step |
| GENERAL TOLERANCES: ISO 2768-mK (ISO 22081)<br>Edges ISO 13715 -0.3 (0.2-0.4) | PROJECTION: FIRST ANGLE<br>ISO 128 / ISO 5456-2 | |
| FINISH / HEAT TREATMENT: Black oxide, Ø30 bond face masked | | UNITS: mm |
| MATERIAL: C45E +N (1.1191) | | SCALE: 2:1 (detail 10:1) |
| TITLE: **Rotor hub sleeve** | | QTY PER ACTUATOR: **1** |

| DRAWING / PART NUMBER | REV | SHEET | SIZE | DATE OF ISSUE |
|---|---|---|---|---|
| **AM-10-rotor_hub** | **A** | 1/1 | A4 | 2026-10-14 |