


VIEW FROM FRONT (1:1)

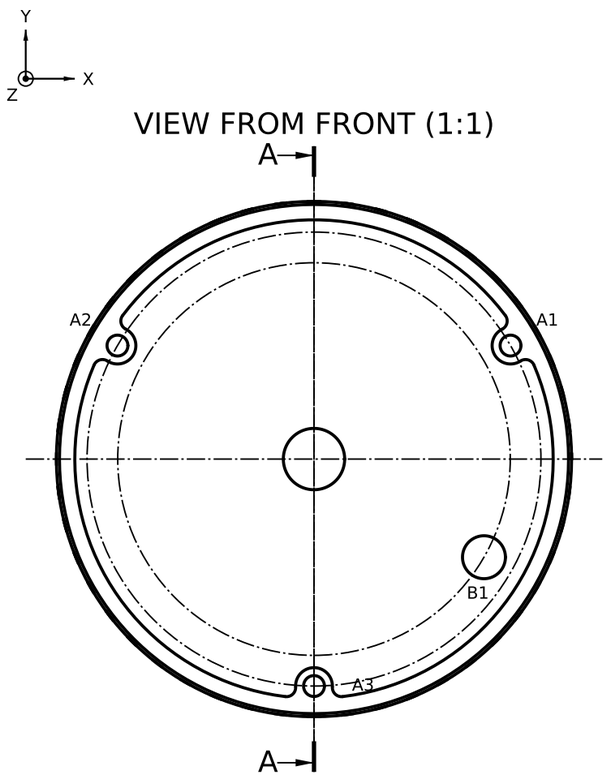

SECTION A-A (2:1)

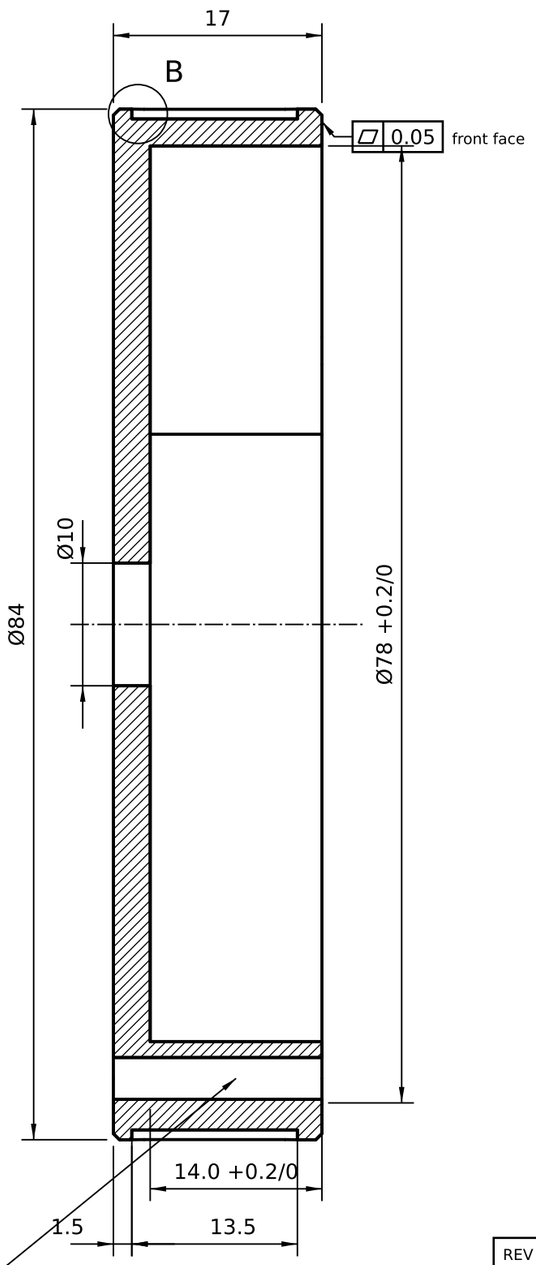

DETAIL B (5:1)

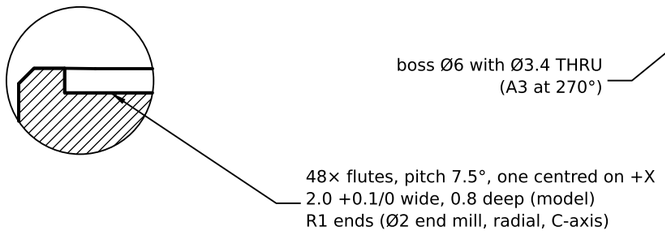

TAG	X	Y	HOLE	NOTE
A1	32.04	18.50	Ø3.4 THRU (boss Ø6)	ISO 273 normal
A2	-32.04	18.50	Ø3.4 THRU (boss Ø6)	ISO 273 normal
A3	0.00	-37.00	Ø3.4 THRU (boss Ø6)	ISO 273 normal
B1	27.71	-16.00	Ø7 +0.2/0 THRU	cable exit, grommet
C1	0	0	Ø10 THRU	shaft cable hole

1. X/Y in the STEP frame, seen from the front (axis Z).
2. A1-A3: position Ø0.2 (pattern matches AM-02 holes B1-B3, ISO 7380 M3×25). R1.5 where the bosses meet the cavity wall (milled with the cavity, Ø6 or smaller end mill).
3. B1: deburr well; fit a grommet for the Ø6.2 readhead cable.

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/rear_cap.step (STEVE 02e31a10 rev 49).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material EN AW-6061-T6, with certificate.
7. Black anodise MIL-A-8625 Type II all over (mask nothing).
8. Flutes are cosmetic grip: if the look allows, a DIN 82 RAA 1.0 straight knurl on the lathe is acceptable.
9. Cavity clears the RLS AksIM-2 readhead by about 1.4 mm axially: hold Ø78 and 14.0 to their limits.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash			SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 49 STEP: cnc/step/rear_cap.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2			
FINISH / HEAT TREATMENT: Black anodise Type II (all over)				UNITS: mm
MATERIAL: EN AW-6061-T6				SCALE: 1:1 (views as noted)
TITLE: **Encoder cap (fluted)**				QTY PER ACTUATOR: **1**
DRAWING / PART NUMBER: **AM-03-rear_cap**	REV: **A**	SHEET: 1/1	SIZE: A3	DATE OF ISSUE: 2026-10-14