

VIEW FROM FRONT (2:1)

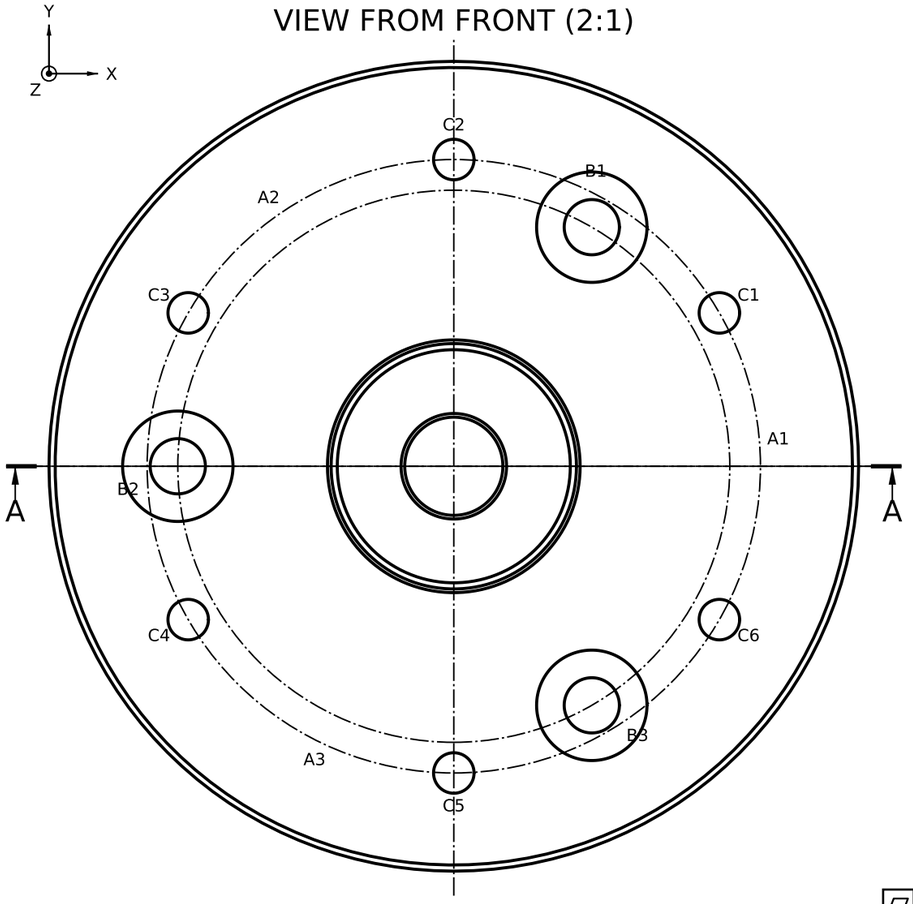

SECTION A-A (2:1)

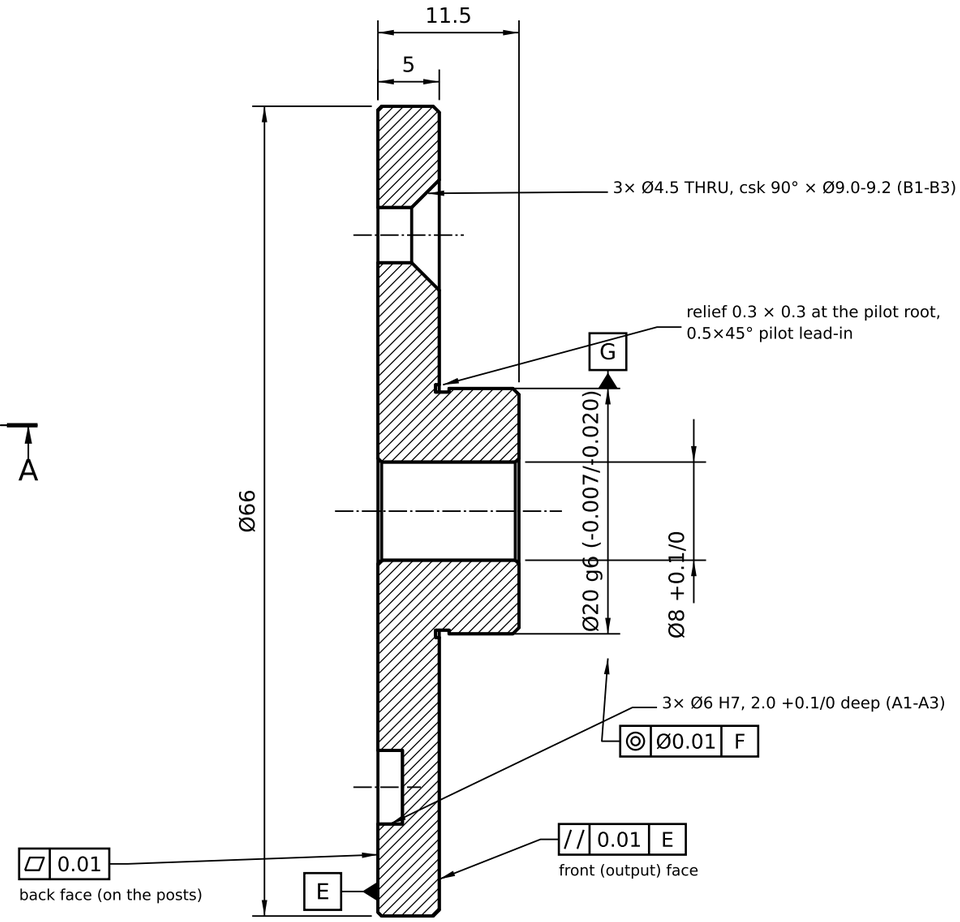

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/carrier_disk.step (STEVE 02e31a10 rev 49).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material AISI 303 (1.4305), with certificate (the model shows 304).
7. Passivate ASTM A967.
8. Datums: E back face; F pin-hole pattern A1-A3; G Ø20 pilot axis.
9. Ø20 g6 pilots the arm (or the lathe chuck backplate's Ø20 H7 bore).
10. Model: STEVE part d93731cc revision 5.

TAG	X	Y	HOLE	DEPTH / NOTE
A1	22.500	0.000	Ø6 H7 (+0.012/0), from back face	2.0 +0.1/0, flat
A2	-11.250	19.486	Ø6 H7 (+0.012/0), from back face	2.0 +0.1/0, flat
A3	-11.250	-19.486	Ø6 H7 (+0.012/0), from back face	2.0 +0.1/0, flat
B1	11.250	19.486	Ø4.5 THRU, csk 90° Ø9.0-9.2 (front)	ISO 10642 M4
B2	-22.500	0.000	Ø4.5 THRU, csk 90° Ø9.0-9.2 (front)	ISO 10642 M4
B3	11.250	-19.486	Ø4.5 THRU, csk 90° Ø9.0-9.2 (front)	ISO 10642 M4
C1	21.651	12.500	M4-6H THRU (drill Ø3.3)	arm load holes
C2	0.000	25.000	M4-6H THRU (drill Ø3.3)	arm load holes
C3	-21.651	12.500	M4-6H THRU (drill Ø3.3)	arm load holes
C4	-21.651	-12.500	M4-6H THRU (drill Ø3.3)	arm load holes
C5	0.000	-25.000	M4-6H THRU (drill Ø3.3)	arm load holes
C6	21.651	-12.500	M4-6H THRU (drill Ø3.3)	arm load holes

1. X/Y in the STEP frame (Z axis = output axis).
2. A1-A3: co-drill with AM-06 clamped on, then ream Ø6 H7 here (slip on the pins); end-mill flat bottoms. They form datum F (the pin-hole pattern, R22.5).
3. B1-B3: ISO 10642 M4 head (Ø8.96 max) flush to 0.2 below the front face. C1-C6: position Ø0.1 to G.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash			SOURCE (MODEL GOVERNS): STEVE part d93731cc rev 5 STEP: cnc/step/carrier_disk.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2			
FINISH / HEAT TREATMENT: Passivate ASTM A967				UNITS: mm
MATERIAL: AISI 303 (1.4305)				SCALE: 2:1
TITLE: **Planet carrier, front disk + output hub**				QTY PER ACTUATOR: **1**
DRAWING / PART NUMBER: **AM-07-carrier_disk**	REV: **A**	SHEET: 1/1	SIZE: A3	DATE OF ISSUE: 2026-10-14