VIEW FROM FRONT (1:1)

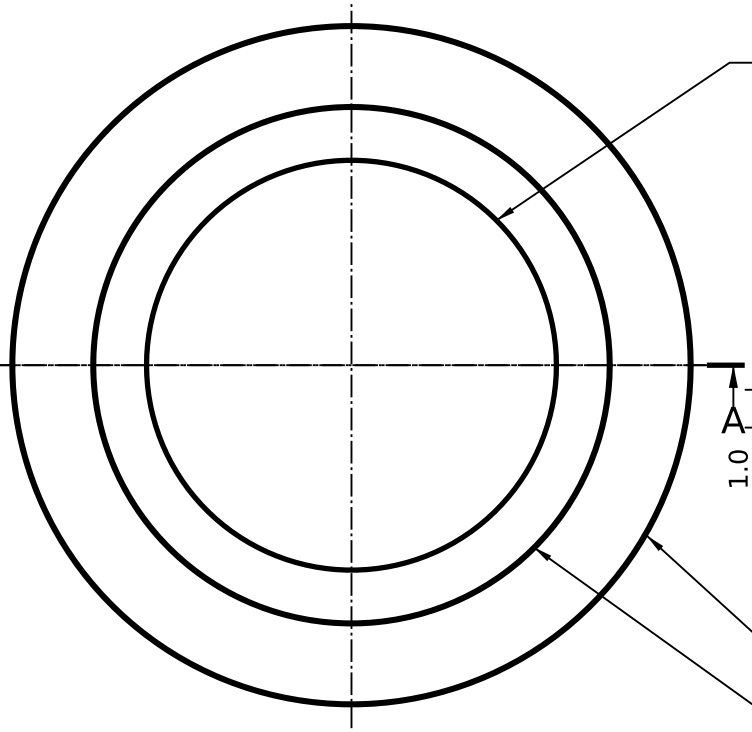

SECTION A-A (5:1), one side

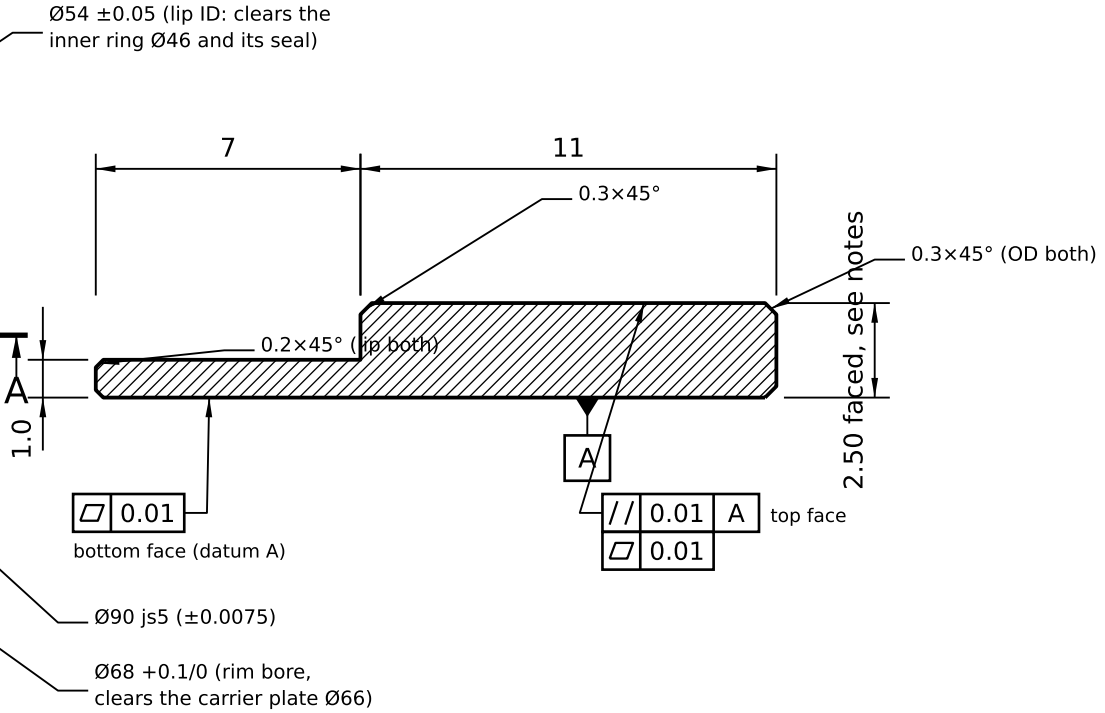

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/bearing_clamp.step (STEVE 02e31a10 rev 49).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Material AISI 303 (1.4305) (the model shows 304). Passivate ASTM A967.
6. Height: make 2.70 +0.05/0, then face the top at assembly to H = R + d - B + 0.02 (±0.01): R measured AM-04 recess depth (1.00), d measured AM-01 seat depth (11.50), B measured CRBH 3510 width (10.00, ISO 492 0/-0.12). Nominal parts give 2.52 (the model shows 2.50). Gives 0.01-0.03 mm crush on the bearing's outer ring.

REV	DESCRIPTION	DATE	BY
B	OD js5 (was g6); height faced to measured parts	2026-10-17	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 49 STEP: cnc/step/bearing_clamp.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2	
FINISH / HEAT TREATMENT: Passivate ASTM A967		UNITS: mm
MATERIAL: AISI 303 (1.4305)		SCALE: 1:1 (section 5:1)
TITLE: **Output-bearing clamp ring**		QTY PER ACTUATOR: **1**

DRAWING / PART NUMBER	REV	SHEET	SIZE	DATE OF ISSUE
AM-08-bearing_clamp	**B**	1/1	A4	2026-10-17