SECTION A-A (2:1)

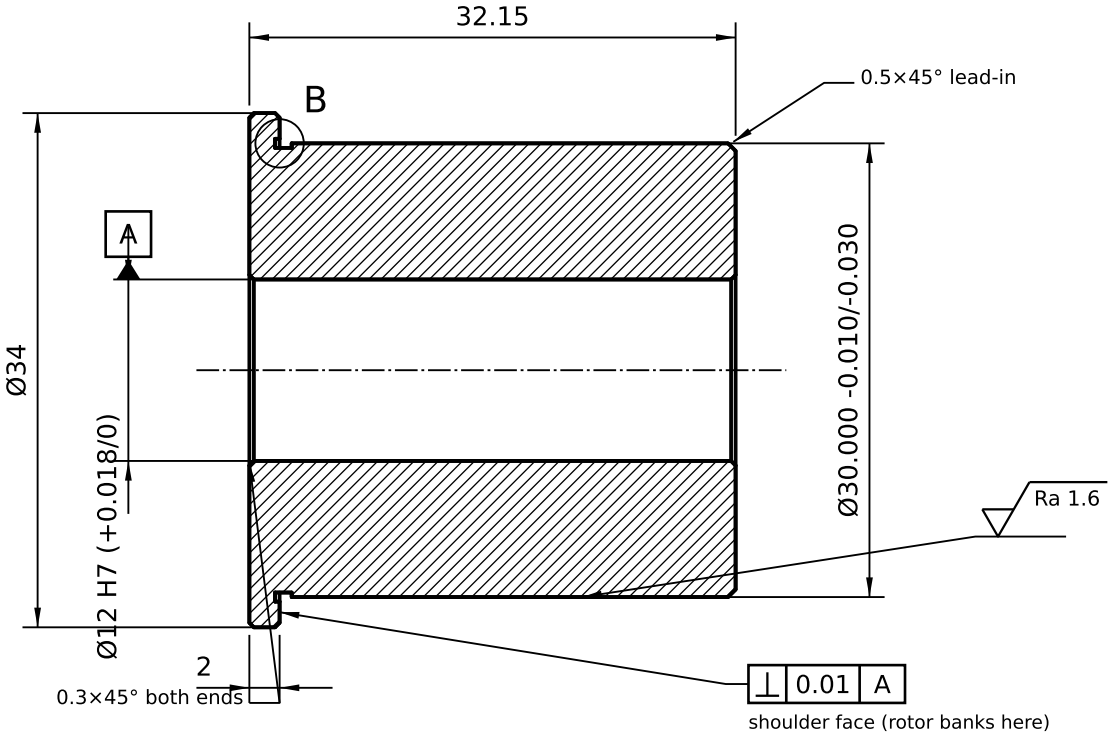

DETAIL B (10:1)

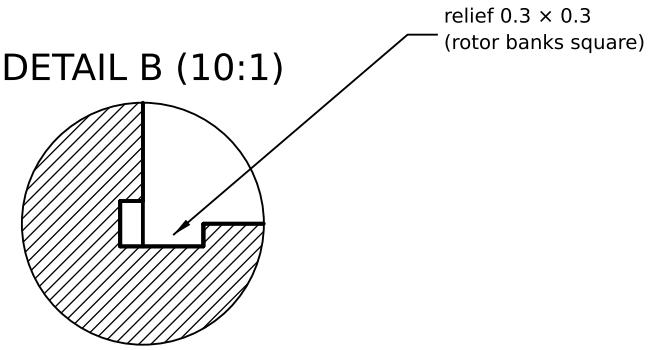

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/rotor.step (STEVE 02e31a10 rev 49).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Material C45E +N (1.1191), with certificate.
6. Black oxide; MASK the Ø30 bonding surface.
7. Press onto the shaft's p6 seat (AM-09 Z3) with Loctite 638. Ø30 gives 0.02-0.04 diametral clearance to the KBM rotor bore 30.010 for Hysol EA 934NA: Ra 1.6, not polished.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 49 STEP: cnc/step/rotor.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2	
FINISH / HEAT TREATMENT: Black oxide, Ø30 bond face masked		UNITS: mm
MATERIAL: C45E +N (1.1191)		SCALE: 2:1 (detail 10:1)
TITLE: **Rotor hub sleeve**		QTY PER ACTUATOR: **1**

DRAWING / PART NUMBER	REV	SHEET	SIZE	DATE OF ISSUE
AM-10-rotor_hub	**A**	1/1	A4	2026-10-14