SECTION A-A (10:1)

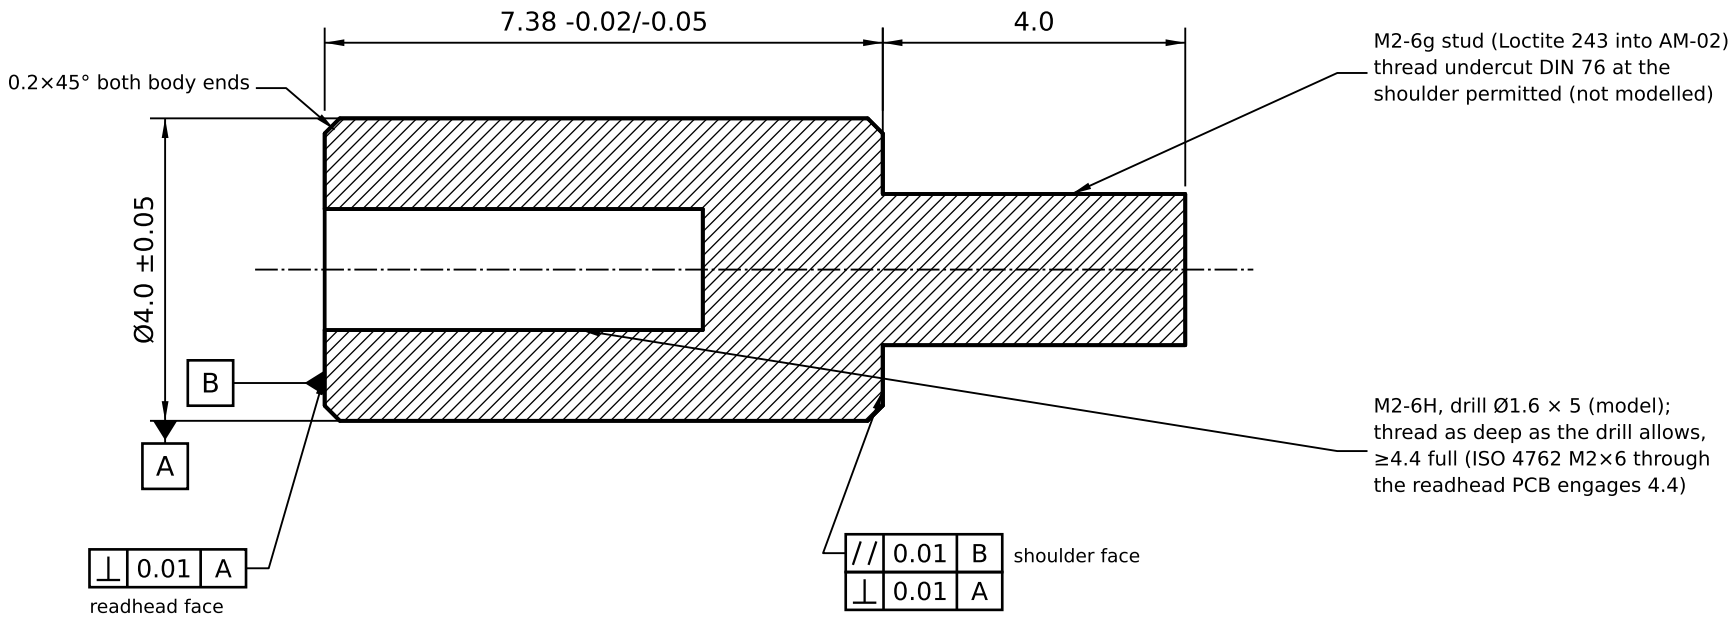

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/standoff.step (STEVE 02e31a10 rev 49).
3. Edges ISO 13715 -0.2 unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material AISI 303 (1.4305) (model shows 304). Passivate ASTM A967. Swiss or bar lathe.
7. Make all four in one batch, length matched within 0.01; shim with RLS MB-ACC shims until the readhead LED is green (2.88 ±0.13 ring-to-readhead gap). Order spares.
8. Alternative: bought M2 male-female Ø4 standoffs (303 or brass) faced to 7.36 ±0.01.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 49; STEP: cnc/step/standoff.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081); Edges ISO 13715 -0.2 unless shown	PROJECTION: FIRST ANGLE; ISO 128 / ISO 5456-2	
FINISH / HEAT TREATMENT: Passivate ASTM A967		UNITS: mm
MATERIAL: AISI 303 (1.4305)		SCALE: 10:1
TITLE: **Readhead standoff**		QTY PER ACTUATOR: **4**

DRAWING / PART NUMBER	REV	SHEET	SIZE	DATE OF ISSUE
AM-12-standoff	**A**	1/1	A4	2026-10-14