

VIEW FROM REAR (1:1)

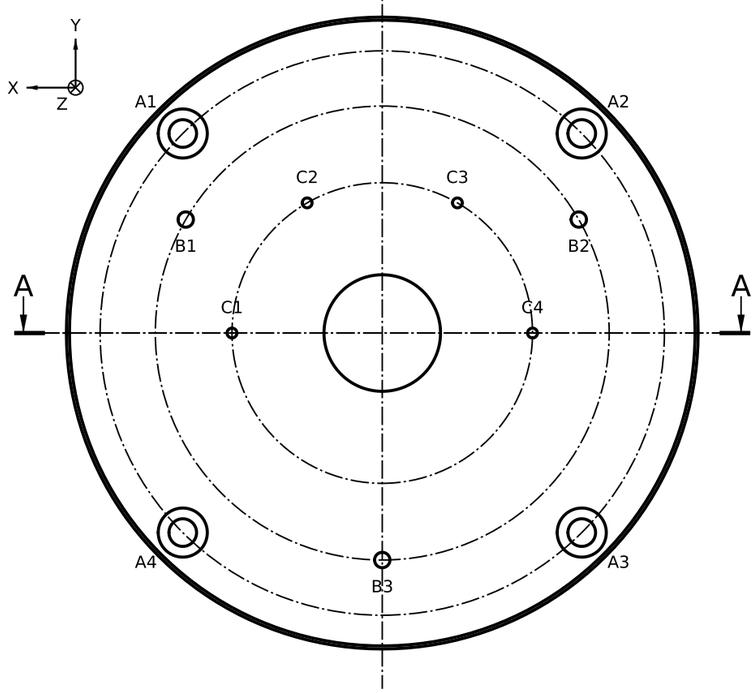


TAG	X	Y	HOLE (from rear face Z -48)	DEPTH
A1	32.53	32.53	Ø4.5 THRU, cbore Ø8.0 +0.2/0	cbore 4.5 ±0.1
A2	-32.53	32.53	Ø4.5 THRU, cbore Ø8.0 +0.2/0	cbore 4.5 ±0.1
A3	-32.53	-32.53	Ø4.5 THRU, cbore Ø8.0 +0.2/0	cbore 4.5 ±0.1
A4	32.53	-32.53	Ø4.5 THRU, cbore Ø8.0 +0.2/0	cbore 4.5 ±0.1
B1	32.04	18.50	M3-6H, drill Ø2.5	8 thd / 9 drill
B2	-32.04	18.50	M3-6H, drill Ø2.5	8 thd / 9 drill
B3	0.00	-37.00	M3-6H, drill Ø2.5	8 thd / 9 drill
C1	24.50	0.00	M2-6H, drill Ø1.6	5 thd / 6 drill
C2	12.25	21.22	M2-6H, drill Ø1.6	5 thd / 6 drill
C3	-12.25	21.22	M2-6H, drill Ø1.6	5 thd / 6 drill
C4	-24.50	0.00	M2-6H, drill Ø1.6	5 thd / 6 drill

1. X/Y in the STEP frame (Z axis = datum B), seen from the rear.
2. A, B: position Ø0.2 to B. C (readhead standoffs): position Ø0.05 to B and to the Ø28 seat axis; they set the encoder alignment (AksIM-2: ±0.4 radial, ±0.3 tangential).
3. A: ISO 4762 M4×16, head 0.5 below the rear face. B: ISO 7380 M3×25 from the cap, 8 engaged.

DETAIL C (5:1)

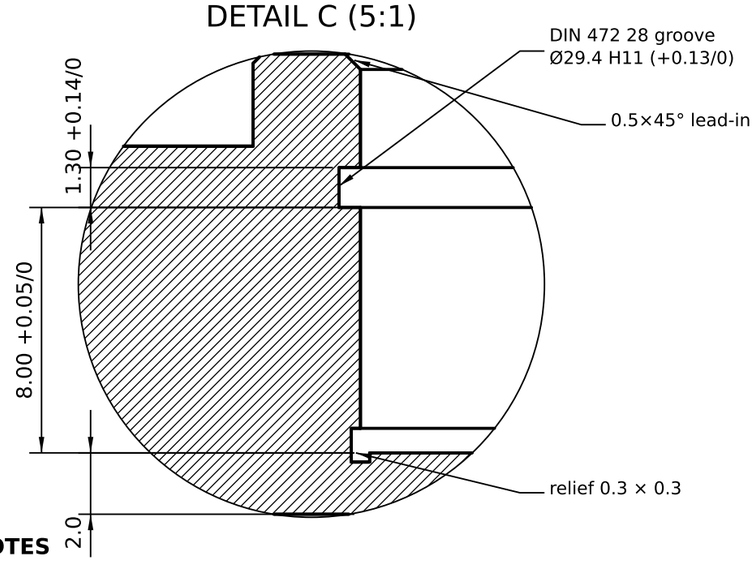

SECTION A-A (2:1)

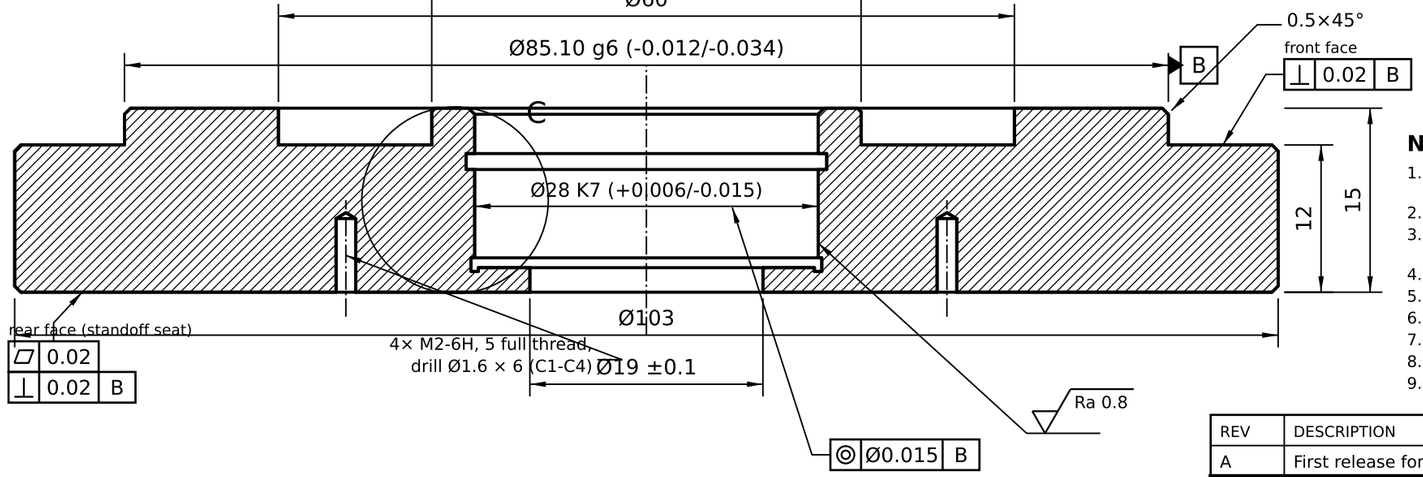

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/end_bell.step (STEVE 02e31a10 rev 48).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material EN AW-6061-T6, with certificate.
7. Black anodise MIL-A-8625 Type II. MASK: Ø28 seat and its groove, Ø85.10 spigot, tapped holes.
8. Datum B: spigot axis. Turn the spigot, the Ø28 seat and the groove in one setup (op 10).
9. Inspect: CMM spigot, seat, groove position and C1-C4 positions; thread gauges.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 48 STEP: cnc/step/end_bell.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2	
FINISH / HEAT TREATMENT: Black anodise Type II, fits masked		UNITS: mm
MATERIAL: EN AW-6061-T6		SCALE: 2:1 (views as noted)
TITLE: **Rear end bell**		QTY PER ACTUATOR: **1**

DRAWING / PART NUMBER	REV	SHEET	SIZE	DATE OF ISSUE
AM-02-end_bell	**A**	1/1	A3	2026-10-14