


VIEW FROM FRONT (1:1)

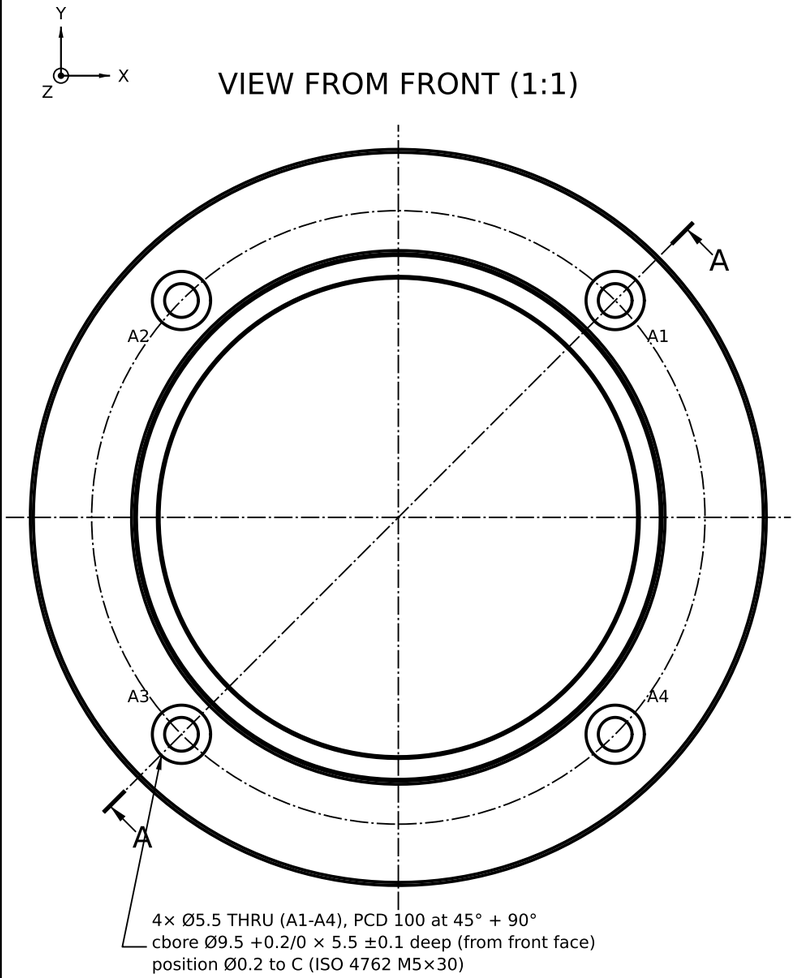

SECTION A-A

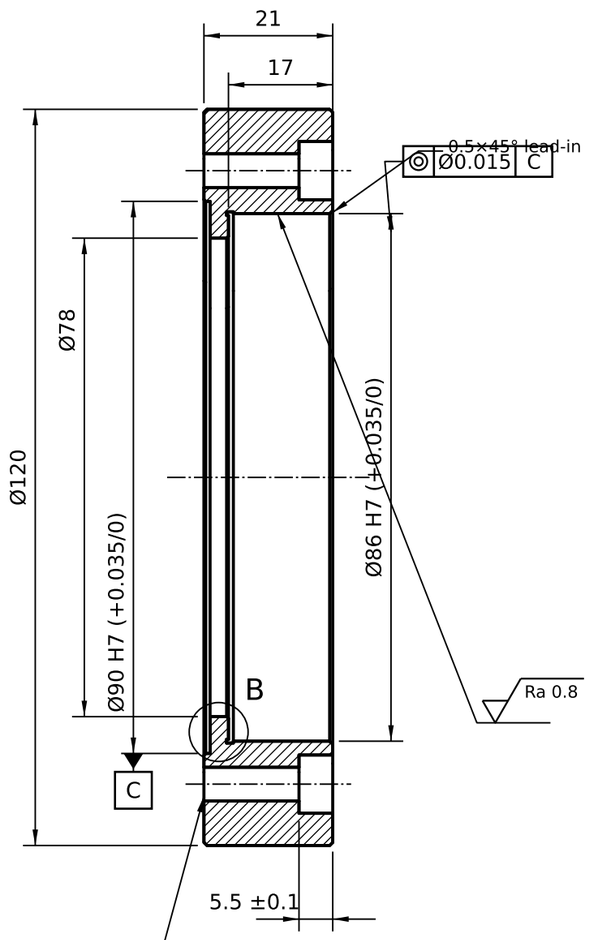

DETAIL B (5:1)

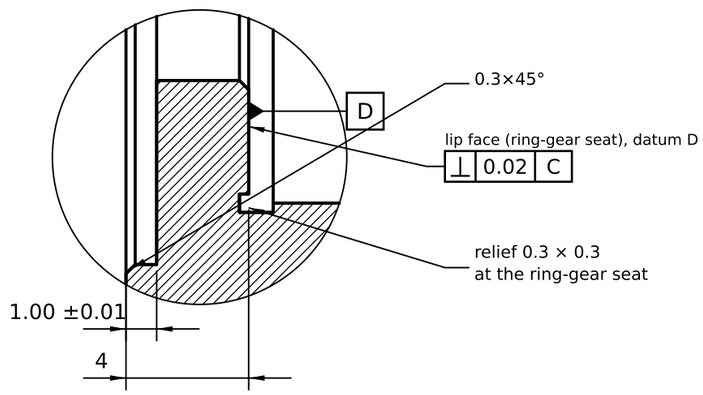

⏥ 0.02 rear face (on the housing)
// 0.02 D

NOTES

1. Dimensions in mm. General tolerances ISO 2768-mK. Fits ISO 286-1/-2 (deviations shown in brackets).
2. STEP file governs undimensioned geometry: cnc/step/front_flange.step (STEVE 02e31a10 rev 48).
3. Edges ISO 13715 -0.3 (break 0.2-0.4 x 45°) unless a chamfer is shown. Remove all burrs, especially in bores and holes.
4. Surface roughness Ra 3.2 µm unless noted (ISO 21920-1).
5. Threads ISO metric coarse, 6H internal / 6g external; thread depths are full-thread depths.
6. Material EN AW-6061-T6, with certificate.
7. Black anodise MIL-A-8625 Type II. MASK: Ø86 ring-gear bore, Ø90 recess, rear face.
8. Datum C: Ø90 recess axis. Turn Ø86 and Ø90 in one setup if possible, or hold the part on C for op 20.
9. Ring gear (AM-15) is pressed in from the front with Loctite 638, against the lip (D). Clamp-ring crush: with the flange screwed down the recess floor presses the clamp ring (AM-08) 0.01-0.04 mm onto the bearing.

REV	DESCRIPTION	DATE	BY
A	First release for quotation and manufacture	2026-10-14	Claude

PROJECT: **Unknown machine actuator**	DRAWN BY: Claude for macncrash	SOURCE (MODEL GOVERNS): STEVE 02e31a10 rev 48 STEP: cnc/step/front_flange.step
GENERAL TOLERANCES: ISO 2768-mK (ISO 22081) Edges ISO 13715 -0.3 (0.2-0.4)	PROJECTION: FIRST ANGLE ISO 128 / ISO 5456-2	
FINISH / HEAT TREATMENT: Black anodise Type II, fits masked		UNITS: mm
MATERIAL: EN AW-6061-T6		SCALE: 1:1 (views as noted)
TITLE: **Front flange**		QTY PER ACTUATOR: **1**

DRAWING / PART NUMBER	REV	SHEET	SIZE	DATE OF ISSUE
AM-04-front_flange	**A**	1/1	A3	2026-10-14