


Energy Storage: capacity and rate limits

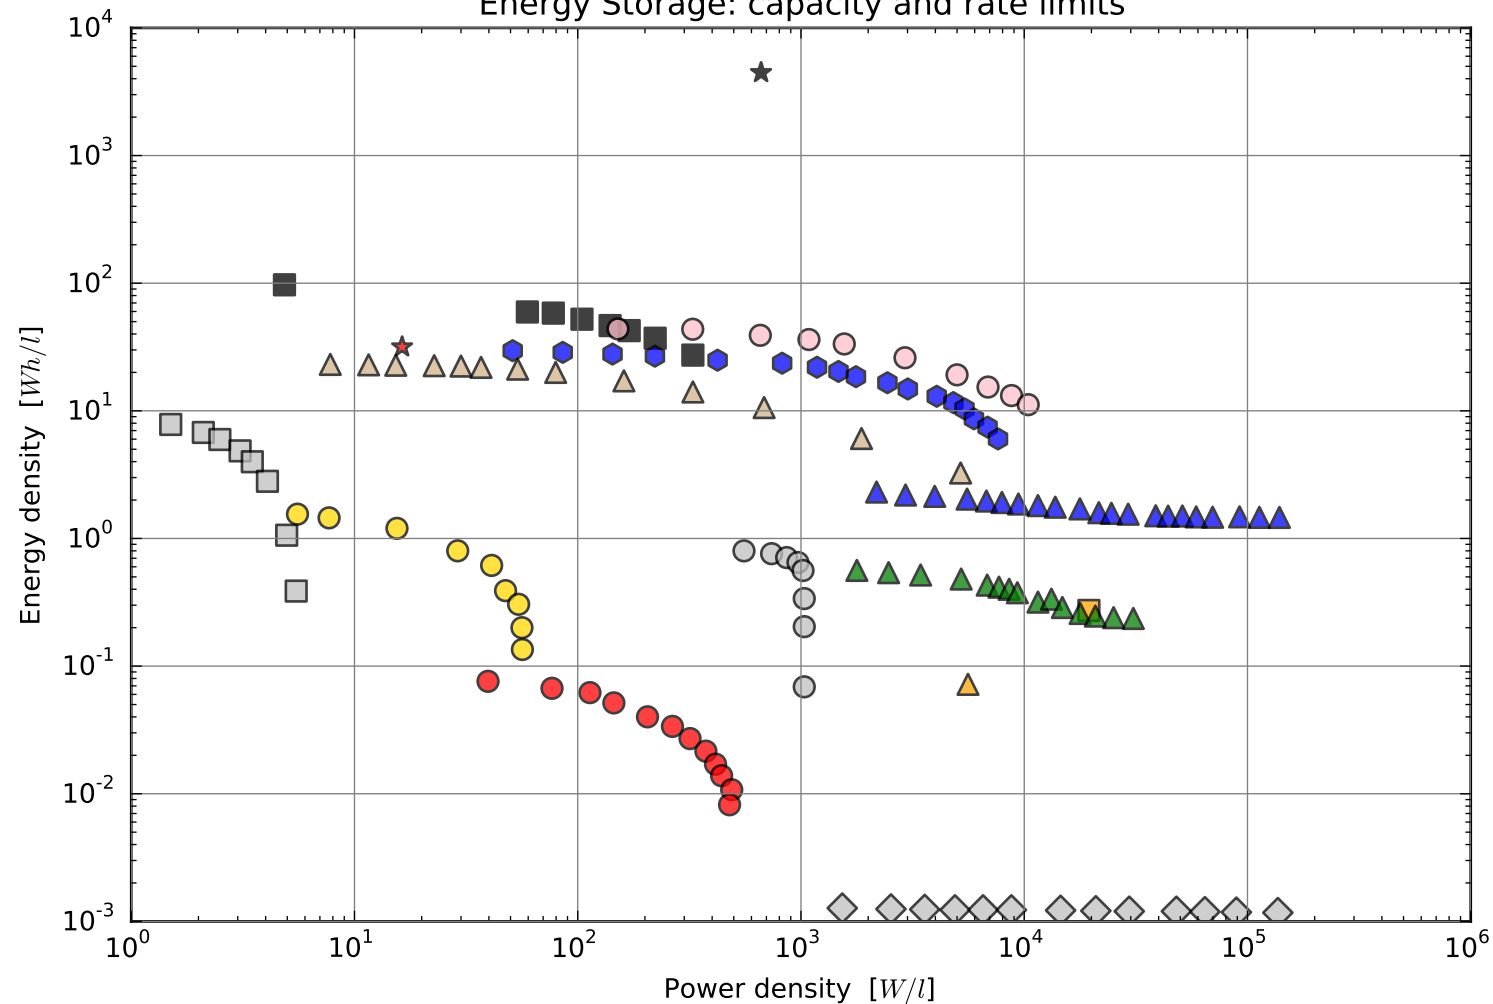

- 2.75V 44mF AC supercapacitor. commercial
- 3V 300microF Al electrolytic capacitor. commercial
- Li thin film Battery. commercial
- Flash converted graphene (Post)
- Flash converted graphene (Pre)
- Laser Scribed Graphene. Interdigitated. IonLiq
- Laser Scribed Graphene. Sandwiched. IonLiq
- Zn MnO₂ IL. Thin GPE. Fully Printed
- Tesla Powerwall. 6.4 kWh Model
- Lead acid battery. Commercial
- LSG/MnO₂ Asym sandwich
- LSG/MnO₂ Sym interdigitated
- LSG/MnO₂ Sym sandwich
- Dispenser printed. 5% discharge
- Dispenser printed. 99% discharge