


Higher & Better

HB INVERTER

FLOOR STANDING PACKAGE

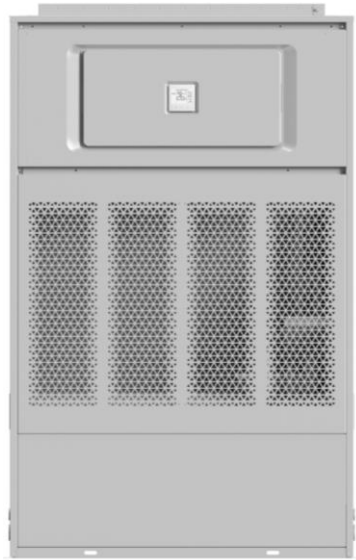

©2025 Carrier. All Rights Reserved.



For people, our planet and generations to come.

A greener planet demands innovative solutions. Carrier plays a vital role in helping address climate change with digitally enabled lifecycle solutions and services that meet the needs of our customers and drive sustainability. We optimize indoor spaces for occupant health and safety while improving energy efficiency. We strengthen and connect the cold chain to preserve, protect and extend the supply of food and medicine worldwide while accelerating the shift to electrification. At Carrier, our inclusive and diverse team works to make a positive difference for people and the planet.

©2025 Carrier. All Rights Reserved.



Higher

- **Reliability**
- **Performance**
- **Efficiency**
- **Versatility**

Better



- **BMS compatible**
- **Power saving**
- **Technology**
- **Service life**



Redefining the Floor standing Package AC

100% Inverter DC scroll compressor with Enhanced Vapor Injection (EVI)

- Increased refrigeration circulation and improved cooling/heating capacity.
- DC inverter stepless adjustment for precision and efficiency.
- DC inverter compressors ensures quite and faster cooling/heating.

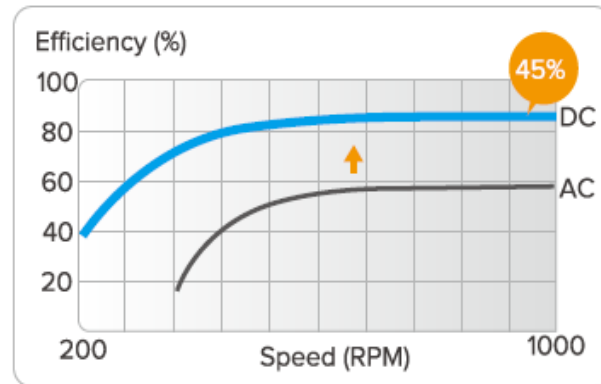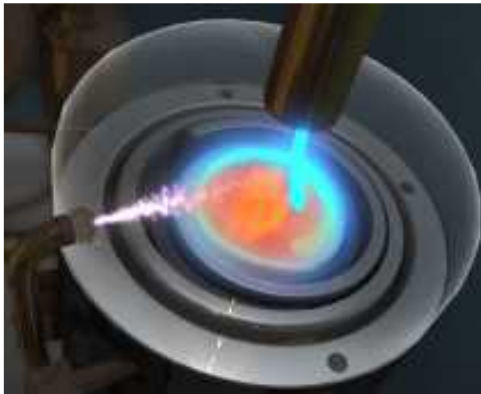



Wider frequency adjustment range



Faster cooling and heating






Higher energy efficiency

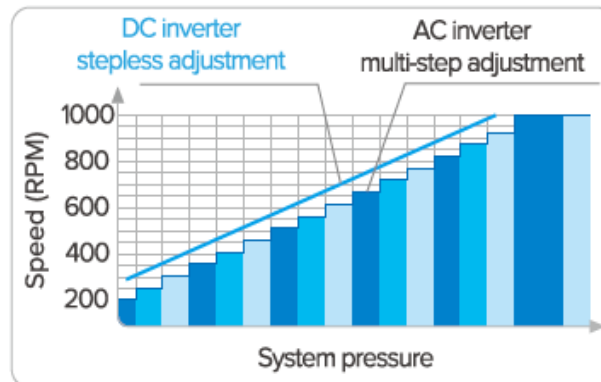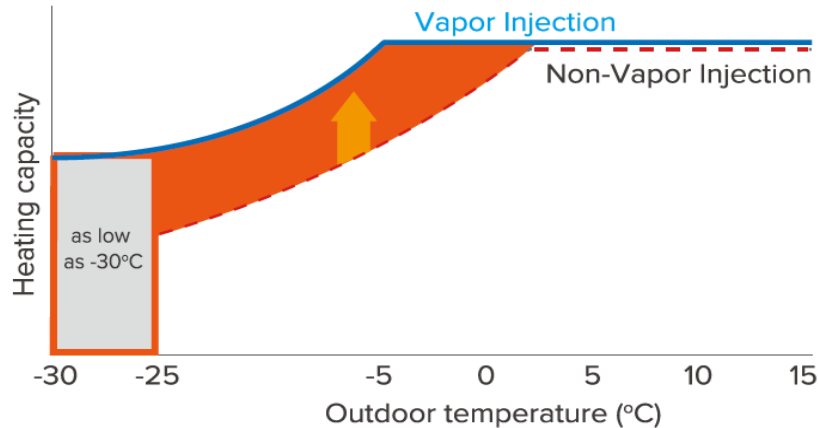


Unmatched Reliability, Performance, Efficiency & Versatility.

Reliable Operation from -30 °C to 55 °C

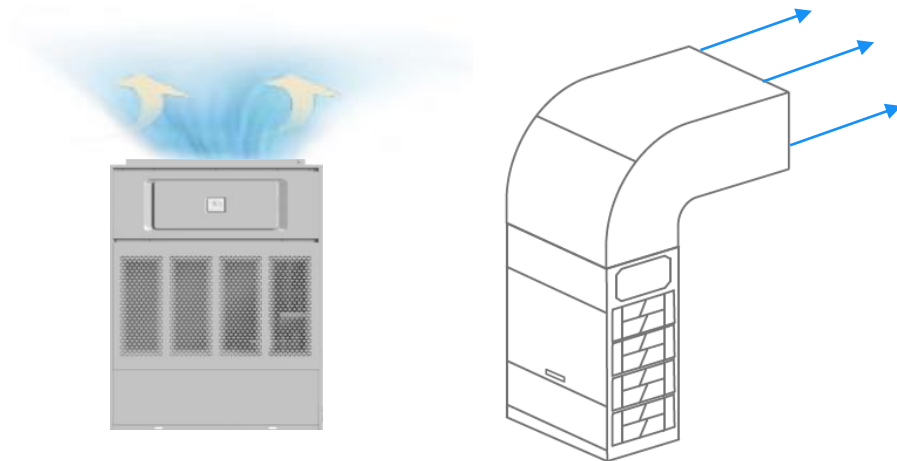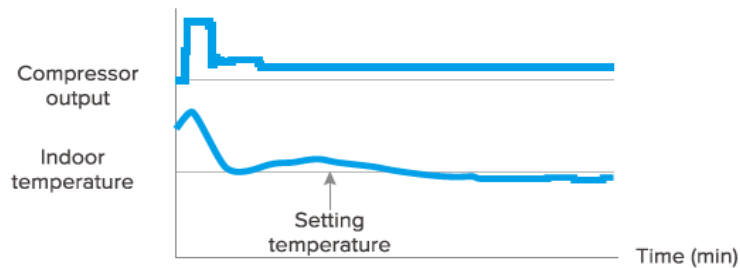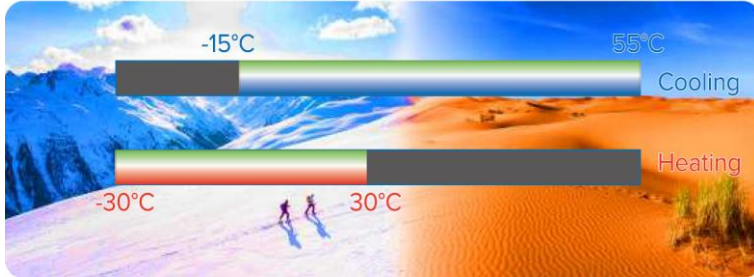

Twin Sub-cooling ensures unmatched performance even at high operating temperatures till 55 °C

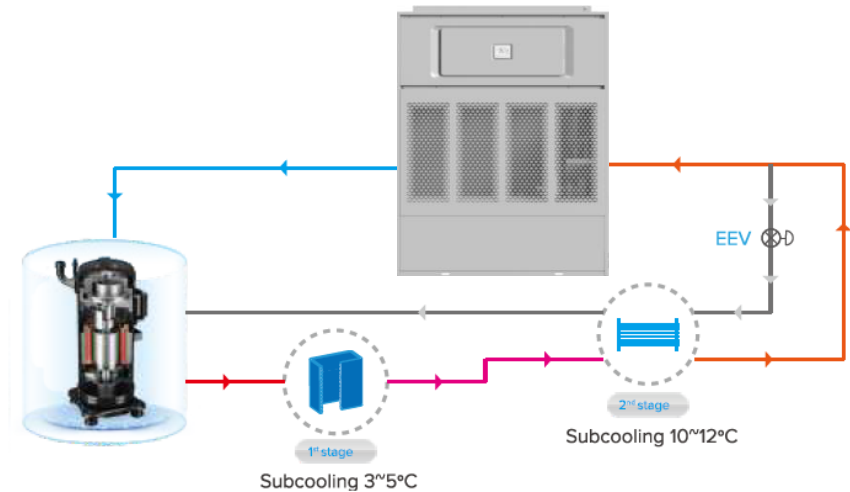

Mirco-channel HX and sealed IP55 rated module cooling for assured reliability of operations.

Flagship BMS compatibility, Power saving, Technology & Serviceability.

Compatible with **BMS Control solutions.**

- RS485, LAN, IOT, Cloud.
- MODBUS Gateway
- BACnet Gateway
- KNX Gateway
- LonWorks Gateway

New age **HB Technology.**

- Silent operation with compressor outside.
- Accumulator, separator and large oil tank.
- EEV for precise and controlled gas flow.
- Auto Hot & Cold changeover.
- Dynamically balanced fan for high flow.

Up-to **40% power saving** over conventional systems.

- Low stand-by consumption
- Low running power with inverter technology.
- 60 step power management with 1% increment.
- Excellent part load efficiency.
- ISEER above **5**.

Best serviceability with designed superiority.

- Auto-refrigerant R410a charging.
- Realtime monitoring controller or cloud.
- 24 VDC capacitor coupled with EEV.
- Ease of reaching critical component.
- Error display in controller for easy identification.

Specifications

Model name			42VS120H115002018 + 38VR012H119018-I	42VS160H115002018 + 38VR016H119018-I	42VS190H115002018 + 38VR018H119018-I
Power supply		Indoor unit	1-phase, 220-240V, 50/60Hz	1-phase, 220-240V, 50/60Hz	1-phase, 220-240V, 50/60Hz
		Outdoor unit	3-phase, 380-415V, 50/60Hz	3-phase, 380-415V, 50/60Hz	3-phase, 380-415V, 50/60Hz
Cooling ¹	Capacity	kW	33.5 / 40	45 / 45	56 / 50
		TR	9.5	12.8	15.9
		kBtu/h	114.3 / 137.2	153.6 / 153.6	191.1 / 171.5
Heating ²	Capacity	kW	38 / 45	56 / 50	63 / 56.5
		kBtu/h	129.7 / 137.2	191.1 / 171.5	215 /193.8
Operating Range	Cooling		-15 °C to 55 °C	-15 °C to 55 °C	-15 °C to 55 °C
	Heating		-30 °C to 30 °C	-30 °C to 30 °C	-30 °C to 30 °C
Compressor type			Hermetically sealed 100% DC Inverter Scroll with soft-starter	Hermetically sealed 100% DC Inverter Scroll with soft-starter	Hermetically sealed 100% DC Inverter Scroll with soft-starter
Fan Type	Indoor Unit		DC Centrifugal Forward curve DIDW	DC Centrifugal Forward curve DIDW	DC Centrifugal Forward curve DIDW
	Outdoor Unit		DC Direct driven Propeller	DC Direct driven Propeller	DC Direct driven Propeller
Indoor Air flow rate ³		m ³ /h	3246/3485/3724/3963/4202/4501/4750	4080/4400/4720/5040/5360/5680/6000	5916/6400/6844/7308/7772/8236/8700
Sound pressure level ⁴	Indoor Unit	dB(A)	52/50.8/49.7/48.7/47/44.5/43.1	57.2/55.9/54.4/53.4/52.3/51.0/49.4	58.7/57.4/56.4/55.2/54.2/53.1/52.1
	Outdoor Unit	dB(A)	59	60	61
Unit Dimension (W X H X D)	Indoor Unit	mm	1150 × 1810 × 615	1150 × 1810 × 615	1600 × 1810 × 615
	Outdoor Unit	mm	1130 × 1760 × 580	1130 × 1760 × 580	1250 × 1760 × 580
Unit Net Weight	Indoor / Outdoor	Kg	158 / 185	163 / 192	209 / 213
Refrigerant	Pre-charged	Kg	7.4 (R410a)	8 (R410a)	8 (R410a)
Pipe connections	Liquid/Gas side	mm	Φ12.7/Φ25.4	Φ15.9/Φ28.6	Φ15.9/Φ28.6
	Drain connection	mm	32	32	32

Note:


- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level difference.
- Air flow rate are from the highest speed to the lowest speed, total 7 levels for each model.
- Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- The above data may be changed without notice for future improvement on quality and performance.
- All specifications are measured at standard external static pressure

Product Images

Versatile ODU with
SD & TD options.



Package IDU for
9.5 & 12.8 TR

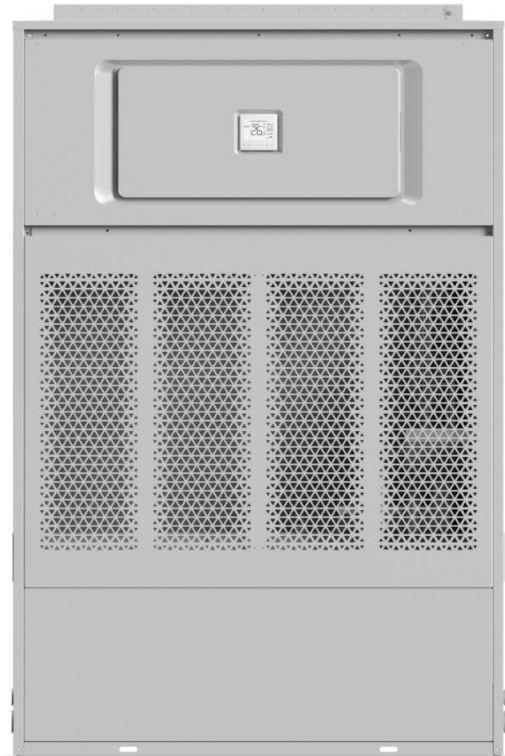

Package IDU for
15.9 TR

