

TOSHIBA



INVERTER CASSETTE

An energy-saving air conditioner
that's a class apart!

INTRODUCING INVERTER CASSETTE FOR LIGHT COMMERCIAL USE

A compact, energy-saving air conditioner, the new cassette comes with a 4-way cassette ideal for light commercial use. Its compact size makes it easily installable in small spaces like retail stores, restaurants, etc. The cassette's USP lies in its high **Energy Efficiency Ratio (EER)** and reduced refrigerant volume.



Environment-friendly
R32 refrigerant



Compact &
lightweight CDU



High energy efficiency
with ISEER value up to 4.62*



IDU designed
for maximum comfort



2 - 6 HP
capacity range



**Wide ambient
temperature operations**
up to 52°C

*(3 HP model)




ENVIRONMENT-FRIENDLY R32 TO REDUCE GWP


New generation of Toshiba cassette uses the new R32 refrigerant with low GWP (Global Warming Potential).



TOWARDS A
SUSTAINABLE FUTURE

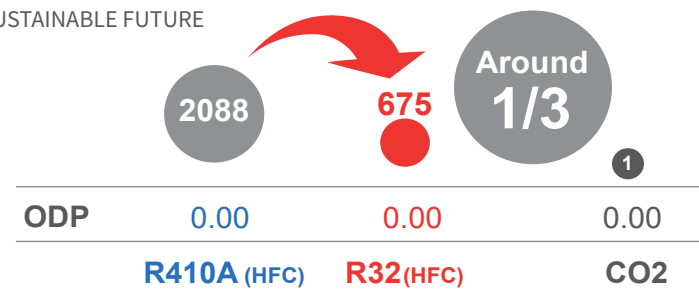


Low GWP R32 refrigerant, combined with 36% reduction of refrigerant charge, allows to reduce the total equivalent CO₂ by approximately **84%** of the system.*

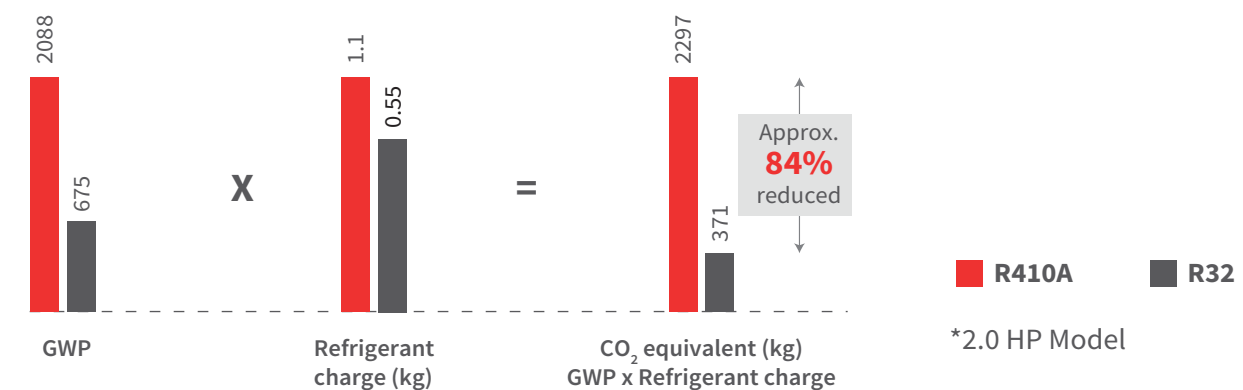

HIGH ENERGY PERFORMANCE

Cassette's low power consumption gives it a high ISEER value, thus facilitating energy-optimal performance.

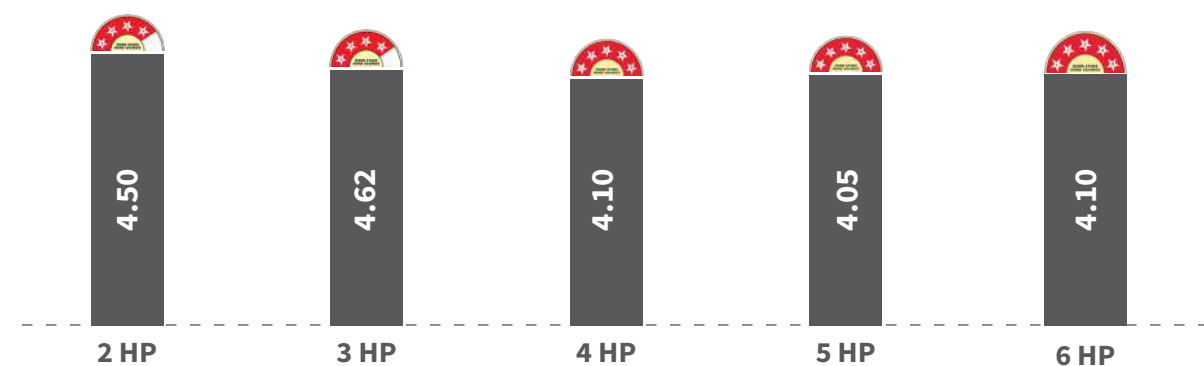


ENDURING DURABILITY

HIGH DURABILITY OF HEAT EXCHANGER

Special design of Toshiba aluminum alloy heat exchanger makes the cassette R32 product resistant to corrosion, making it highly durable.


Aluminum general alloy is used for making the heat exchanger fin while aluminum special alloy is used for the heat exchanger tube. Incorporating this design in the cassette has reduced the corrosion rate and expanded the life of the product.

Additionally, the corrosion test results confirmed that the durability of the Toshiba aluminum alloy heat exchanger is at a similar level as a copper heat exchanger.

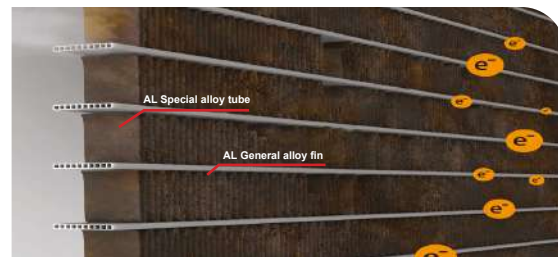

Toshiba aluminum heat exchanger

Aluminum general alloy fin acts as a sacrifice material protecting the aluminum special alloy tube from corrosion

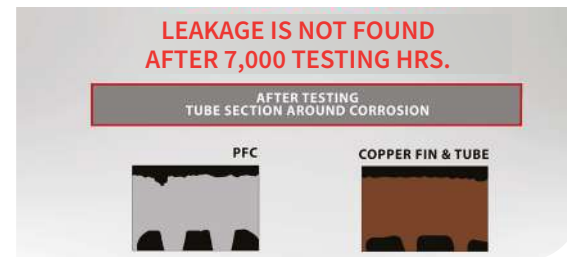


Salt spray test

Test results show similar levels between Toshiba aluminum alloy heat exchanger, copper fin and tube heat exchanger

INSTALLATION OF PLASTIC JOINT COVER AND RUBBER SHEET

The installation of a plastic joint cover and a rubber sheet between the aluminium alloy heat exchanger and the steel part in the outdoor unit helps achieve longer lifetime operation. This also reduces corrosion.

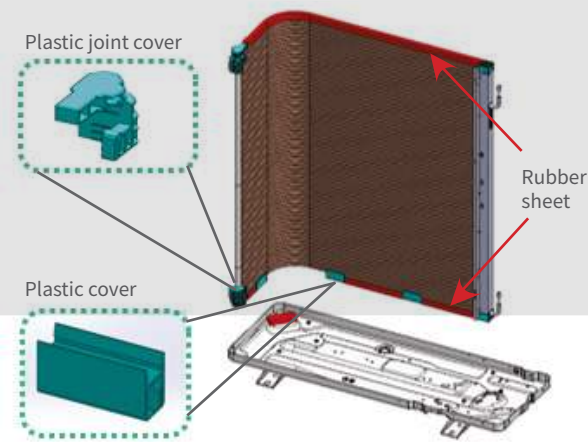

HIGH RELIABILITY

PROTECTION CIRCUIT ON CONTROL BOARD

The Inverter cassette has a protection circuit* to protect the PC board under unstable power supply and a function that detects miswiring of the power supply.



Black out



Unstable power supply




Temporary lower voltage




Protection circuit

*Applicable for 3Phase products

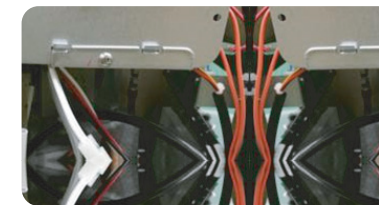


Inverter box

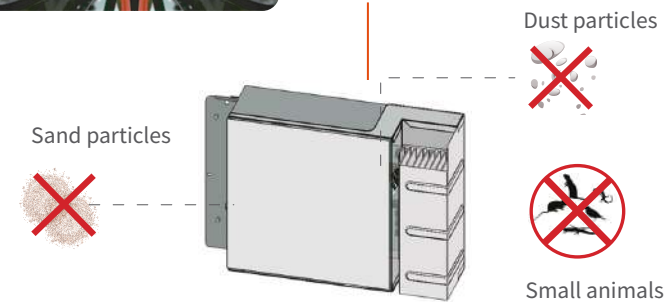

SEALED-UP INVERTER BOX

The inverter box is fully sealed up in order to avoid malfunction due to sand & dust particles, and small animals.

STRAINER IN PIPE SYSTEM

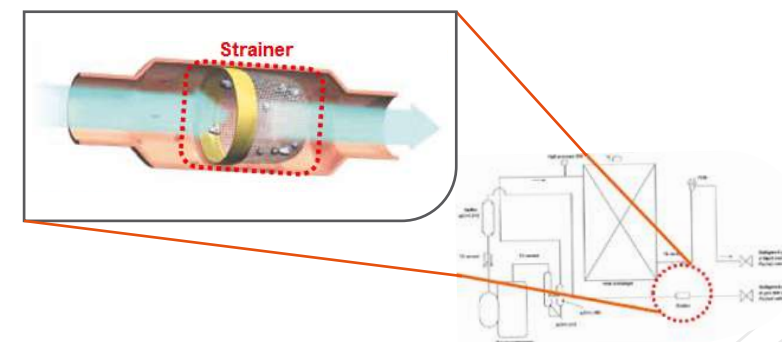

Cassette has a strainer in the pipe system to remove dust and metal-abrasion powder.

COMPACT AND INSTALLER-FRIENDLY CDU

COMPACT SIZE AND LIGHT WEIGHT

CDU is made with aluminum alloy to make it light weight.



2 HP to 3 HP




4 HP to 6 HP



Less than 900mm up to 6 HP, the cassette is extremely compact and can be installed in very small places.

In addition, chassis under **6 HP are less than 53kgs.**


INSTALLER-FRIENDLY

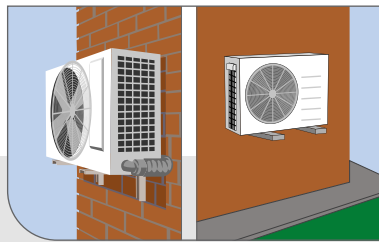

 The outdoor unit is easy to install on the wall via racks



 It is possible to reuse the pipe as the working pressure for R410A and R32 are similar

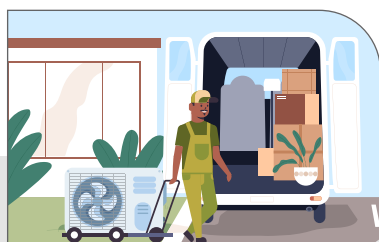

 Easy to carry and transport



APPLICATION AREA



RETAIL




RESTAURANT



OFFICE




LIVING ROOM

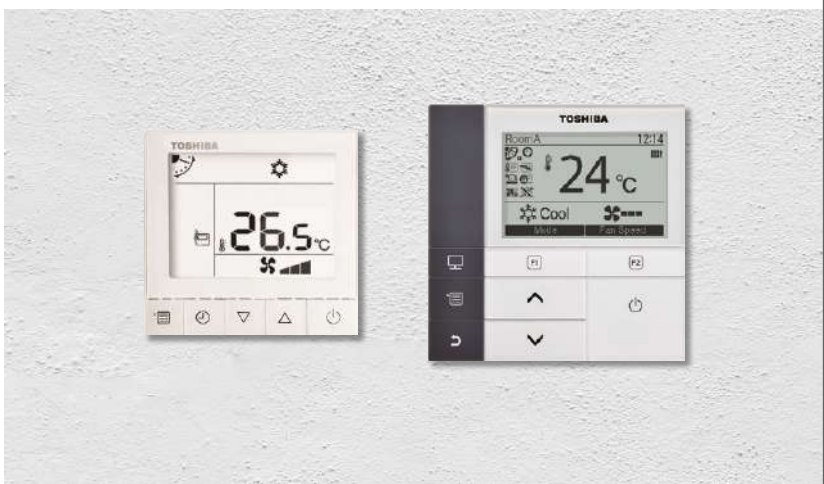

IDU DESIGNED FOR MAXIMUM COMFORT

BMS COMPATIBILITY

EASY AND EFFIECIENT OPERATION

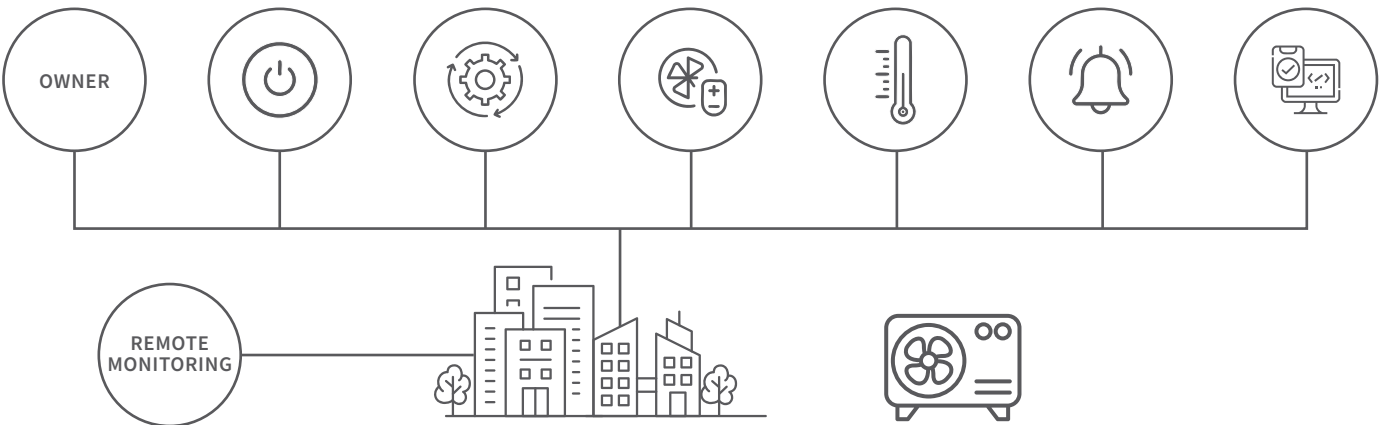


Building Management Systems get integrated control through the RS485 communication port.

Cassette can be connected to external BMS* using Modbus **BMS-IFMB1280U-E** and BACnet **BMS-IFBN1281U-E**

*With additional accessory TCB- PCNT30TLE2 (TCC- Link interface) & TCB-PX30MUE (Terminal box)

HIGHER ACCURACY OF ADJUSTMENT OF THE INDOOR AIRFLOW

Through a 5-step airflow, the inverter cassette can control the wind strength with higher accuracy.*

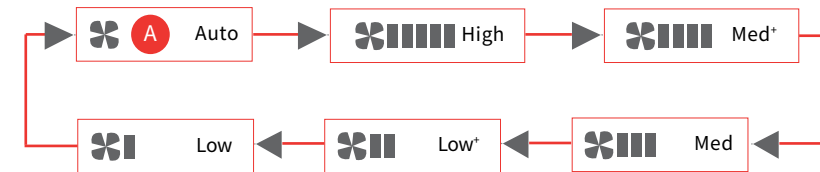

*This function is available with a wireless remote controller and a wired remote controller named RBC-AMSU51-EN and RBC-ASCU11-E respectively.



RBC-AMSU51-EN RBC-ASCU11-E
These remote controllers are optional accessories.

AUTO-RESTART FUNCTION

For stable operation in areas with unstable electricity, cassette has a standard auto-restart function for seamless continuity in blackout situations.



Post power failure recovery



Cassette ensures that its operations continue as per the previous state

4-WAY CASSETTE

The 4-way cassette is designed to provide uniform air distribution and total comfort. It is the ideal solution for light commercial applications.

COMFORT

The angles of each louver can be set individually

Individual setting of louver position: 3 different swing modes


1.Standard



2.Diagonally Opposite




3.Turn-around

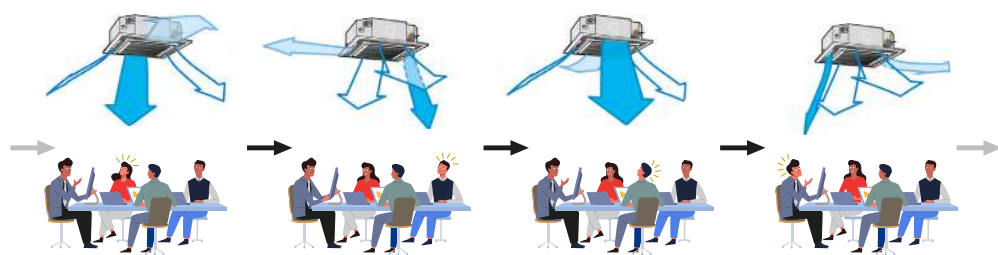

FLEXIBILITY

Built-in high-lift drain pump

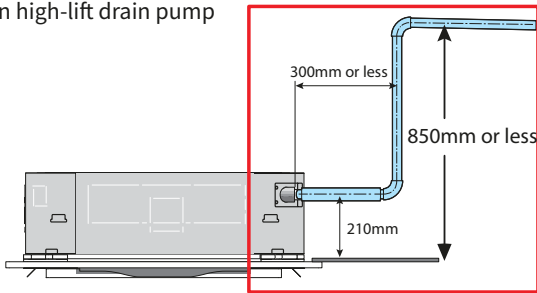


CLEANLINESS

Built-in silver glass (anti-bacteria treatment) on the drain pump lid to prevent the growth of bacteria and mould in the drain pan. This increases cleanliness and reduces bad odour emanating from the drain water.



SUITABLE FOR HIGH CEILINGS

Even in spaces with high ceilings, comfortable airflow is carried down to the floor level.

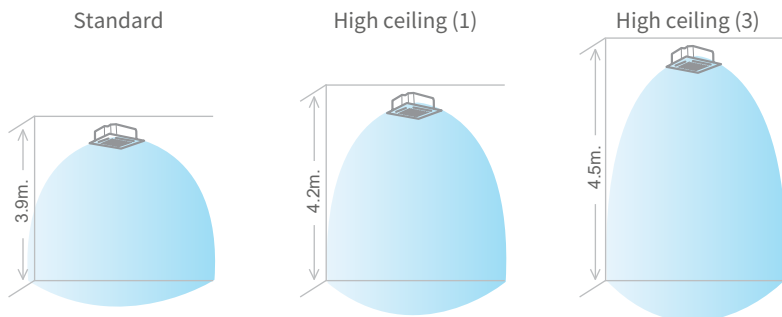

When the 4-way discharge direction is selected, a ceiling up to 4.5m in height can be accommodated (6 HP).

TECHNICAL SPECIFICATION

Equivalent		HP	2.0	3.0	4.0	5.0	6.0
Model Name	Indoor Unit	(RAV-)	GV1802UD-IN	GV2402UD-IN	GV3602UD-IN	GV4202UD-IN	GV4802UD-IN
	Outdoor Unit	(RAV-)	GV1802AD-IN	GV2402AD-IN	GV3602A8D-IN	GV4202A8D-IN	GV4802A8D-IN
Power Supply	Outdoor Unit		1-Phase, 50Hz, 230V		3-Phase, 50Hz, 400V		
Cooling Capacity		kW	5.2 (1.3~5.5)	7.0 (1.3~7.6)	10.6 (3.5~11.2)	12.3 (3.5~12.8)	14.1 (3.5~15.0)
Power Consumption		kW	1.54	2.02	3.42	4.25	4.72
EER			3.38	3.47	3.10	2.89	2.99
ISEER			4.50 (4-Star)	4.62 (4-Star)	4.10 (5-Star)	4.05 (5-Star)	4.10 (5-Star)
Indoor Unit	Airflow (H/M/L)	m³/h	1,010/850/790	1,050/880/820	1,670/1,510/1,260	1,870/1,700/1,560	1,900/1,730/1,580
	Sound Pressure Level (H/M/L)	dB(A)	35/31/29	36/32/29	47/45/40	42/40/38	43/41/39
	Dimensions (HxWxD)	Main Unit (mm)	223x840x840	223x840x840	223x840x840	286x840x840	286x840x840
		Panel (mm)	30x950x950	30x950x950	30x950x950	30x950x950	30x950x950
	Weight	Main Unit (kg)	18	21	21	24	24
		Panel (kg)	5	5	5	5	5
Outdoor Unit	Refrigerant Charge (R32)	kg	0.55	0.87	1.03	1.08	1.13
	Sound Pressure Level	dB(A)	56	55	53	56.5	58
	Dimensions (HxWxD)	mm	561x825x353	691x975x353	890x900x320	890x900x320	890x900x320
	Weight	kg	27	36	46	46	53
Piping Connections	Liquid Side	mm	6.4	9.5	9.5	9.5	9.5
	Gas Side	mm	12.7	15.9	15.9	15.9	15.9
Max. Total	Pipe Length	m	25	25	30	30	50
Max. Height		m	10	10	20	20	30
Operation	Range	°C	15 ~ 52	15 ~ 52	15 ~ 52	15 ~ 52	15 ~ 52



TOSHIBA

This catalogue provides certain general information and is intended for general guidance only and Carrier is not liable for any damage arising out of the use of the catalogue. The Manufacturer reserves the right to change any product specification without prior notice.

TOSHIBA SERVICE HELPLINE

1800 3000 3545
1800 1021 421

For more details, please contact our sales office:



Corporate & Registered Office: Carrier Airconditioning & Refrigeration Ltd, Kherki Daula Post, Narsingpur, Gurgaon 122004, Tel: 0124-4825500
Sales Offices:— Ahmedabad: 079-44820400/401 **Ghaziabad:** 0120-4183260 **Bangalore:** 080-43442000 **Bhubaneswar:** 9778030033 **Chandigarh:** 0172-5007549/50 **Chennai:** 044-66448888 **Cochin:** 0484-4029000/001, **Coimbatore:** 7397444250 **Daryaganj:** 011-23244491, 9810973264 **Delhi/NCR:** 0124-4873200 **Goa:** 9987868667 **Guwahati:** 9831079624 **Hyderabad:** 040-4181 2222 **Indore:** 0731-2445200 **Jaipur:** 0141-4921737 / 738 **Kolkata:** 033-40592000/3000 **Lucknow:** 0522-4158701/704 **Navi Mumbai/Thane:** 9167788252 **Mumbai:** 022-61700700 **Nagpur:** 9881714903 **Patna:** 7070621177 **Pune:** 020-48571000 **Raipur:** 9752542882 **Surat:** 7433920332

CIN: U74999HR1992FLC036104

Website: www.toshibaac.in

E-mail: info@toshibaac.in

All Proprietary Rights Reserved by Carrier.