2017

XMS DESKTOP INTERFACE USER GUIDE

This document is intended to provide general information and basic technical information on the functionality of the new XMS Desktop Interface that will be pre-installed on all Mitsubishi Australia Getac tablet.

BOSCH AUTOMOTIVE SERVICE SOLUTIONS
Bosch Automotive Service Solutions
1/1/2017

Table of Contents

1 GENERAL INFORMATION OF SYSTEM 2

2 BEFORE GETTING STARTED 2

2.1 Contents 2

2.2 Attaching the stylus to the Getac F110 Tablet 3

2.3 Wireless Internet Setup 4

3 XMS PROXY INFORMATION AND CONFIGURATIONS 6

3.1 XMS Proxy Server Information 6

3.2 XMS Client Configurations 7

4 USING THE GETAC F110 TABLET SHORTCUT BUTTONS 8

5 SYSTEM FUNCTIONS 10

5.1 Home Page 10

5.1.1 Button Descriptions and Functionality 10

6 CHECKING FOR UPDATES 12

7 POINTS OF CONTACT 12

1 GENERAL INFORMATION OF SYSTEM

Mitsubishi Australia will be releasing the next generation diagnostic system with a Getac F110 tablet. With also the introduction of XMS Desktop Interface which will replace the common Windows Desktop, a number of changes will also be implemented.

2 BEFORE GETTING STARTED

XMS Desktop Interface and XMS Agent require an active internet connection to receive updates and other relevant information. Therefore it is required that a wireless network connection be setup once the F110 tablet has completed the initial Setup.

2.1 Contents

The following contents are included with the Getac F110 tablet.

● AC adapter 	● AC power cord 
● Battery pack x 2 	● Screen cleaning cloth 
	● Stylus 
● Document(s)	● Tether 

If any of the above is missing, please contact Bosch Automotive Service Solutions on: 1300 783 031 within 24 hours for assistance.

2.2 Attaching the stylus to the Getac F110 Tablet

A tether is provided for attaching the stylus to your Tablet PC.

1. Insert one of the tether's loop ends through the hole of the stylus. Then, insert the other end through the first loop and pull it tight.



2. Insert the other loop end to the tether hole on the Tablet PC. Then, insert the stylus end through the loop and pull it tight.



2.3 Wireless Internet Setup


This setup procedure requires the following information to be available before any setup is started. If the required information is not available, please contact the IT Department to obtain this information.

- Name of the wireless Internet to be connected to
- Password to the wireless internet that is been connected to
- May require some information on the type of security used on the wireless connection


Important Note: Some wireless internet connections will require advance setup by your IT Department.

The setup below requires some basic technical knowledge of connecting to a ***known*** wireless connection.

1. Click on the [Utilities] button  and click on [Manage Wireless] button 
2. An Intel PROSet Application will launch. Click on refresh to scan for any wireless internet within range

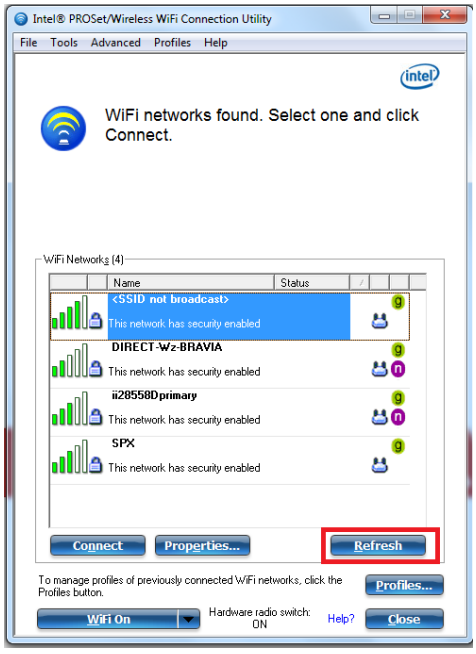

3. Select your wireless internet connection name and click on [Connect]

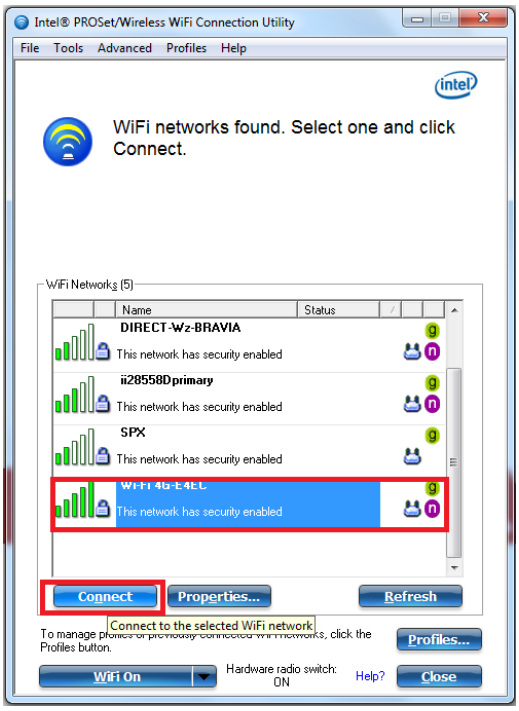


4. A password prompt will appear (If password is in used). Type in the password and click OK



5. An Intel prompt will appear. Click [YES] to confirm



6. You should now have an active wireless connection on your PC

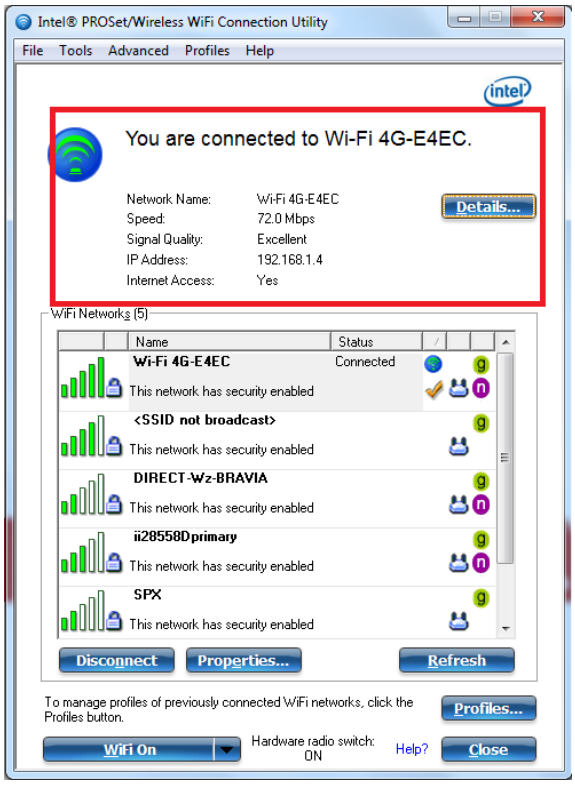

If you have followed the above steps and are still not getting an internet connection, please consult your IT Department as there may be more settings required.

3 XMS PROXY INFORMATION AND CONFIGURATIONS

3.1 XMS Proxy Server Information

Note: If your site uses a Proxy Server, please add the below URLs to your firewall exception list:

- https://xmscommandsvc.service-solutions.com
- https://94826a7ccf5bbbe71c8b-019e65a987004551a1ab5c2948274ea4.ssl.cf1.rackcdn.com
- https://XmsReadinessCheckSvc.service-solutions.com

For any units with anti-virus software it's sometimes necessary to whitelist certain executables.
For XMS that would be:

- SPX.DSConfigApp.exe
- XmsConnectivityUtility.exe
- SPX.DSWinWebService.exe
- Spx.PackageAgent.exe


3.2 XMS Client Configurations


You will also need to configure the XMS client application with your proxy server details.

1. Click on the [Utilities]  button on your main menu. A new menu will appear.


   Click on [XMS Agent]  to launch the XMS client application.

2. Once the application appears, Click on the [CONFIGURE] button at the bottom to access the properties page.

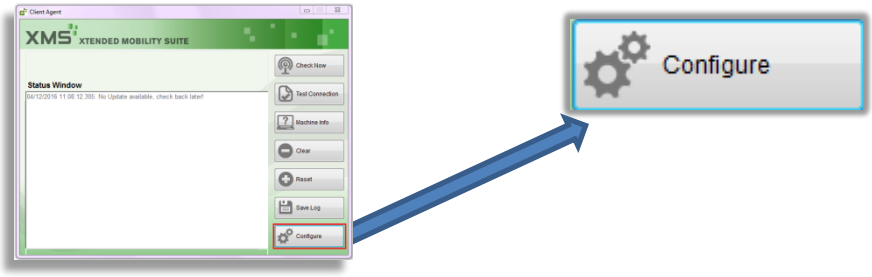

3. Click on [Detect proxy]  button to detect your current proxy setting.


A confirmation prompt will appear to indicate that the proxy setting. Confirm the setting is correct and then click [YES] to apply the settings.

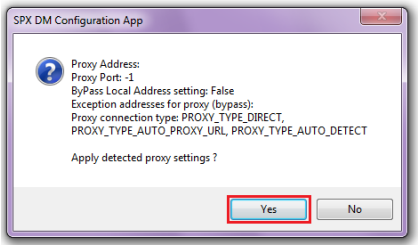


If [Detect Proxy] doesn't detect the correct settings, Select [Use a Proxy Server for LAN], and enter the details manually.




If required place a tick in the [Enable Proxy Authentication] and then enter the Username and Password.

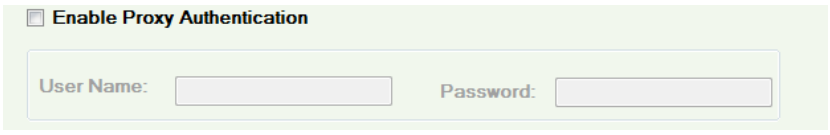


4. Then click on [Test Connection] to verify that the connection to the server can be established. Then click on [Download File] to test if downloading of files is possible.





Click on Test Connection to verify that the connection is successful. A message will appear to indicate this:






Click on [Download File] to verify that the downloading is successful. A message will appear to indicate this:

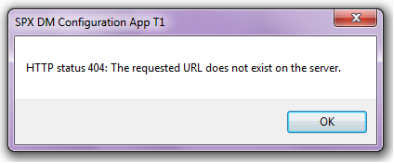

5. Once the settings is confirmed and working click on 

[OK] to close the XMS properties page.

4 USING THE GETAC F110 TABLET SHORTCUT BUTTONS

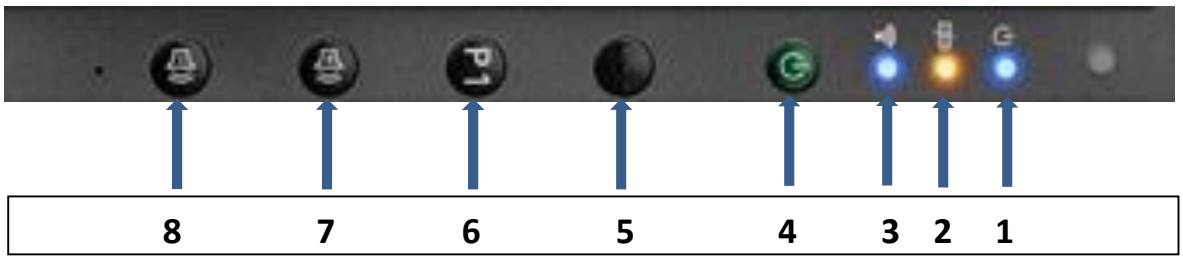

1. Power indicator LED
2. Charging indicator LED
3. Wireless On indicator LED
4. Power Button
5. Onscreen keyboard (see figure 1.0)
6. P1 button will toggle between active applications, folders and files (see figure 2.0)
7. Screen brightness up
8. Screen brightness down
9. Windows button  at the bottom center is for print screen

Figure 1.0 Onscreen Keyboard



Figure 2.0 Application toggling



5 SYSTEM FUNCTIONS

5.1 Home Page

After turning on the device, the following home page will appear. From here you can select what task you require to perform by clicking on the appropriate button.



5.1.1 Button Descriptions and Functionality

	Launch the Mitsubishi MUT-III Diagnostic Software
	Launch the Mitsubishi MUT-III SE Diagnostic Software
	Launch a sub menu sub menu containing additional software.

	Launch sub menu containing pdf service manuals.
	Launch sub menu containing order forms.

	Launch sub menu allowing user to select removable devices or open pre-defined folders
	Launch sub menu containing basic system configuration tools. *Note: The Advance configuration option is locked and is for XMS support use only.*
	Launch sub menu containing tools to troubleshoot issues relating to your hardware or software.
	Launch dealer portal login website
	Launch a web link to allow user to provide feedback on any issues that they are experiencing.

6 CHECKING FOR UPDATES

To check for update click the [Check updates] button. This will query the server for any outstanding updates. The [Device Status] information panel (top right corner) will indicate if an update is available or not.



7 POINTS OF CONTACT

For further information and troubleshooting help regarding the Getac F110 tablet and XMS Updates and XMS Desktop Interface please contact:

Bosch Automotive Service Solutions

Ph.: (Toll Free Australia) 1800 025 462 / 1300 888 937 / 1300 783 031 Option 4
(International) +61 3 9541 3922
Fax: 1300 783 041 / +61 3 9543 4293
Email: support.aus@service-solutions.com

Mitsubishi Technical Helpdesk

For issues relating to vehicle, such as ECU update, communication, please contact Mitsubishi TAC support

Email: techsupport@mmal.com.au